

A.A.
ELECTRIC
SUPPLY
CO.

Wholesale




ELECTRICAL SUPPLIES

4012-18 OGDEN AVE., CHICAGO


WE OWN AND OPERATE THESE BUILDINGS FOR YOUR CONVENIENCE

OUR LARGE WAREHOUSE FACILITIES ENABLE US TO
GIVE YOU PROMPT, EFFICIENT SERVICE, AND QUAL-
ITY MERCHANDISE AT THE LOWEST POSSIBLE PRICES

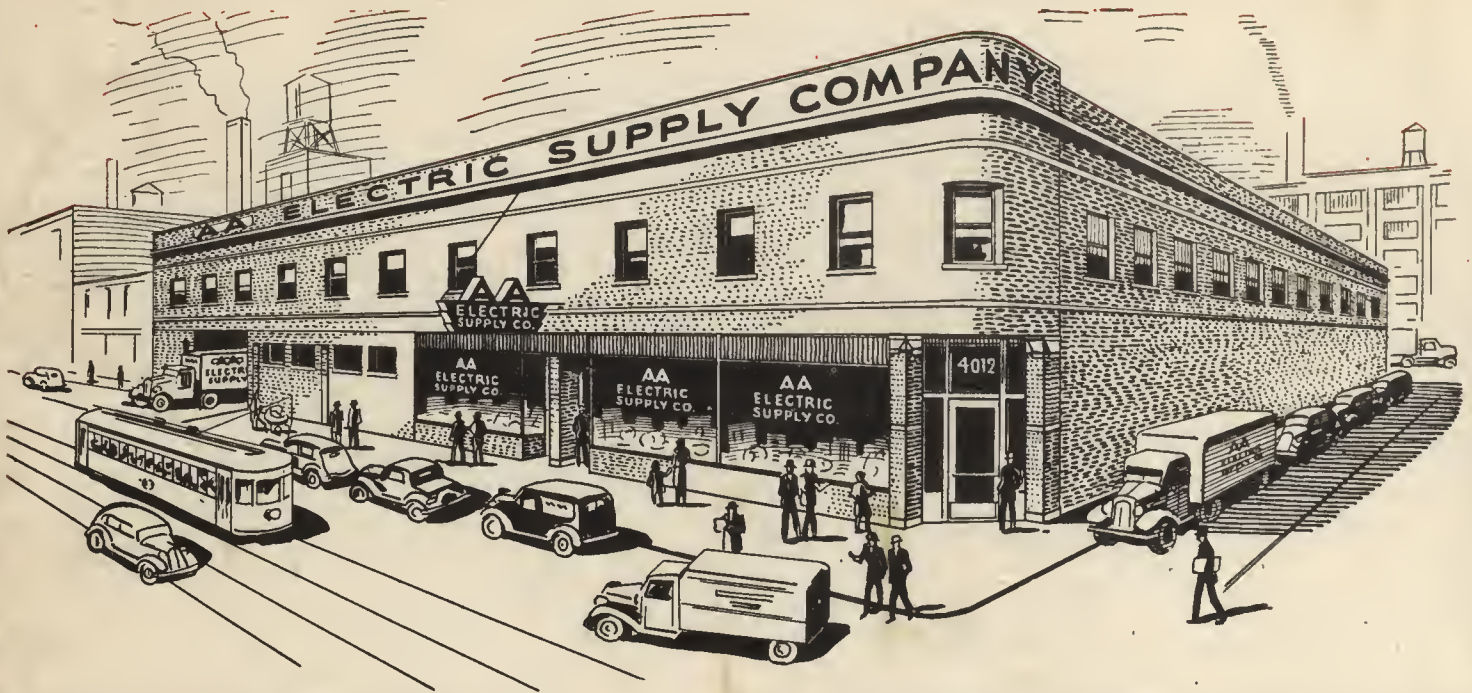

WE PAY THE FREIGHT
ON ALL ORDERS OF
\$50.00 OR MORE

We will make a prepaid freight delivery to any point in the United States of orders which will total or exceed \$50.00 at net billing prices. This applies to all items listed in this catalog. If you should desire shipment by Railway Express or Parcel Post on orders exceeding \$50.00, shipment will be made via collect delivery and suitable allowance based on existing freight rates at actual weight, will be made on our charge to you. This allowance will be shown on our formal invoice. Important transportation savings can be effected by increasing your orders to \$50.00 and taking advantage of our liberal offer.

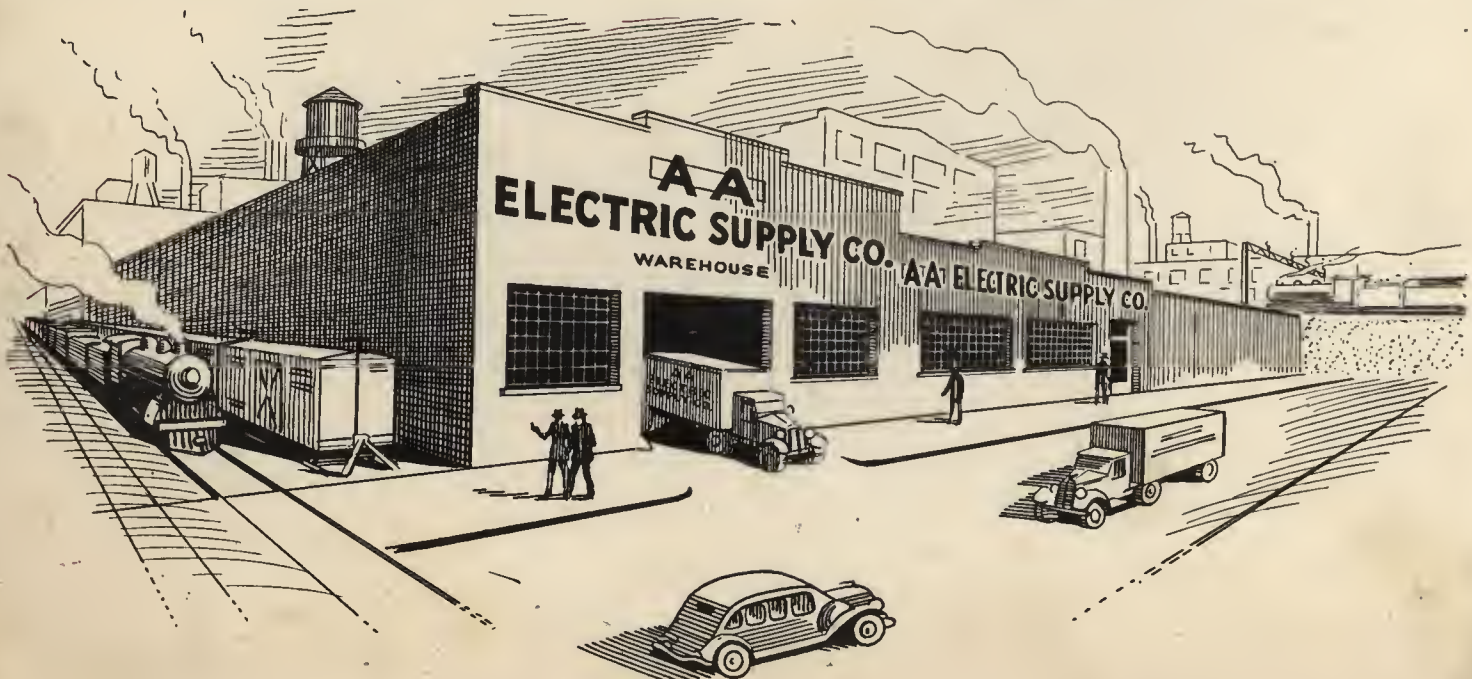

CODE WIRE and CABLES

CODE SOLID R. C. WIRE

SINGLE BRAID

Moistureproof and fire resistant. Colors easily identified. Always uniform and smooth. Easy to fish through conduit.



No.	Size	100 Ft.	500 Ft. Coils, Per 1000 Ft.	1000 Ft. Lots, Per 1000 Ft.
W1228	14 Black			
W1229	14 White	69c	5.30	5.15
W1230	14 Red			
W1231	12 Black			
W1232	12 White	92c	7.30	7.00
W1233	12 Red			
W1234	10 Black			
W1235	10 White	1.35	10.80	10.30
W1236	10 Red			
W1237	8 Black			
W1238	8 White	2.15	17.80	16.90
W1239	8 Red			

NON-METALLIC SHEATHED CABLE



Saves time and expense. Easy to handle. Easy to use. Conductors are tinned copper with code rubber insulation and colored braid covering. Wrapped with moistureproof paper and jute filled. Overall covering is cotton braid saturated with moistureproof, flame retarding compound. Color, black. Will bend without cracking.

WITHOUT GROUND WIRE

No.	Size	1 Ft. Coil	Ft. in Coil	Coil	1000 Ft.	5000 Lots, Per 1000 Ft.
W1263	14-2	3c	250	5.10	19.50	19.10
W1264	12-2	5c	200	6.74	32.80	31.30
W1265	10-2	6c	200	10.51	44.20	42.60
W1266	8-2	11c	125	11.78	84.70	80.70
W1267	14-3	6c	200	7.98	38.80	36.60
W1268	12-3	8c	200	11.68	53.30	50.70
W1269	10-3	9c	200	14.00	64.00	61.00
W1270	8-3	14c	125	14.25	104.00	99.00
W1271	6-3	20c	125	20.61	151.10	143.90

Prices on cable with ground wire on application.

DOUBLE BRAID STRANDED R. C. WIRE



No.	Size	100 Ft.	500 Ft., Per 1000	1000 Ft., Per 1000
W1240	8	2.36	22.20	21.20
W1241	6	3.00	28.30	27.00
W1242	4	3.97	37.60	35.70
W1243	3	5.50	50.90	48.00
W1244	2	5.79	54.60	52.10
W1245	1	8.11	76.50	74.50
W1246	.0	9.72	91.60	89.00
W1247	.00	11.80	110.00	108.00
W1248	.000	14.00	132.00	129.00
W1249	.0000	16.50	156.00	153.00

TRIPLE BRAID WEATHERPROOF WIRE



Soft drawn, solid conductors. Does not crack or peel. Closely woven cotton braid thoroughly saturated with weatherproof compound giving absolute protection. Approved and Underwriters' Laboratories inspected.

No.	Size	Wt. Per 1000 Ft.	Lb.	50 Lb., Per Lb.	100 Lbs.
W1272	14	25 lbs.	30c	28c	27.80
W1273	12	35 lbs.	29c	27c	25.60
W1274	10	53 lbs.	26c	24c	22.70
W1275	8	75 lbs.	25c	23c	21.40
W1276	6	112 lbs.	24c	22c	20.60
W1277	4	164 lbs.	23c	22c	20.30

TWIN CONDUCTOR (DUPLEX)



SOLID RUBBER COVERED

No.	Size	100 Ft.	500 Ft. Coils, Per 1000 Ft.	1000 Ft. Lots, Per 1000 Ft.
W1250	14	1.99	15.70	14.80
W1251	12	2.59	20.40	19.20

LEAD ENCASED RUBBER COVERED CABLE



SOLID CONDUCTORS

No.	Size	Under 500 Ft., Per 100	500 Ft. Lots, Per 1000
W1252	14 Single	2.08	19.60
W1253	14 Duplex	3.31	31.20
W1254	14 3-cond.	8.50	80.10
W1255	12 Single	2.43	22.90
W1256	12 Duplex	5.10	48.10
W1257	10 Single	3.70	34.90
W1258	10 Duplex	6.06	57.10
W1259	8 Single	4.96	46.80
W1260	8 Duplex	8.50	80.10

SERVICE ENTRANCE CABLE



Three-conductor oval cable for service work. Has two insulated stranded conductors with overall wrapping. Bare neutra is wrapped concentrically over. Wrapped overall is hot dipped galvanized steel tape and a heavy fabric weatherproof braid.

No.	Insulated	Bare Neutral	1 Ft. Coil	Ft. in Coil	Coil	1000 Ft.
W1278	2 No. 8	1 No. 8	13c	250 ft.	28.25	107.00
W1279	2 No. 6	1 No. 6	16 1/2 c	150 ft.	21.30	135.00
W1280	2 No. 6	1 No. 8	15 1/2 c	200 ft.	27.20	129.00
W1281	2 No. 4	1 No. 4	21 1/2 c	150 ft.	28.35	179.00

UNARMORED

No.	Insulated	Bare Neutral	1 Ft. Coil	Ft. in Coil	Coil	1000 Ft.
W1282	2 No. 8	1 No. 10	11 1/2 c	250 ft.	24.75	93.40
W1283	2 No. 6	1 No. 8	14c	200 ft.	24.80	117.00

BRAIDED THERMOSTAT WIRE



For low voltage service. Covered with overall braid. Conductors color coded.

No.	Size	1 Ft.	100 Ft.	500 Ft. Per 1000
W1261	18-2 cond.	1c	78c	6.60
W1262	18-3 cond.	1 1/2 c	1.12	9.35

LOOM NON-METALLIC FLEXIBLE CONDUIT



Interior tight and slick. Will not kink or crack in cold weather.

No.	Size	Coils	1 Ft. Coil	Coil Lot	1000 Ft.
W1284	3/8 in.	250 ft.	1 1/2 c	2.79	9.95
W1285	1/4 in.	250 ft.	2 1/2 c	4.72	17.00
W1286	3/8 in.	250 ft.	3 1/2 c	7.47	
W1287	1/2 in.	250 ft.	5c	7.99	
W1288	3/4 in.	150 ft.	7 1/2 c	9.38	

ARMORED CABLES and CONNECTORS

A. B. C. FLEXIBLE ARMORED CABLE



The Safe B X. Has kraft wrapping between the conductors and steel armor. Anti-short bushings prevent shorts and save time. A supply with each coil. Has maximum flexibility. Underwriters' approved.

14-2 ARMORED CABLE					
No.	25 Ft.	50 Ft.	100 Ft.	250 Ft.	1000 Ft.
W1289	70c	1.35	2.60	5.88	23.50
SOLID CONDUCTOR					
No.	Size	Coils	1 Ft.	Coil	1000 Ft.
W1290	14-3	250	3 1/2 c	8.45	33.70
W1291	12-2	250	3 1/2 c	8.38	33.40
W1292	12-3	250	5c	12.38	44.80
W1293	10-2	250	6c	14.63	51.50
W1294	10-3	250	8c	18.48	65.20
W1295	8-2	150	9c	12.75	75.00
W1296	8-3	150	12c	16.50	96.90
ANTI-SHORT BUSHINGS					
No.					Each
I 1297	Bag of 35				30c

LEAD ARMORED B X



Same construction as regular B X except the conductors are completely covered with a lead sheath.

SOLID CONDUCTOR				
No.	Size	Coils	1 Ft.	Coil
W1298	14-2	150	7c	9.53
W1299	14-3	150	11c	12.15
W1300	12-2	150	9c	10.73
W1301	12-3	150	13c	13.75

ARMORED LAMP CORD



BABY B X			
No.	Size	1 Ft.	1000 Ft.
W1302	18-2	4 1/2 c	35.00

BARE ARMORED GROUND WIRE



Single, solid uninsulated conductor covered with steel armor.

No.	Size	1 Ft.	100 Ft.	1000 Ft.
W1303	8-1	5c	3.54	34.00
W1304	6-1	5 1/2 c	4.64	44.08

BARE COPPER WIRE



Medium hard drawn, solid.

No.	Size	1 Ft.	100 Ft.
W1305	8	2c	1.40
W1306	6	2 1/2 c	1.93

B X CABLE CLIP




Will take No. 14, 12, or 10 two- or three-conductor B X cable.

No.	100'	1000
F1307	20c	1.50

B X STAPLES

Large size for B X. Approx. 85 to pound.


No.	1 Lb.	10 Lbs.	100 Lbs.
F1308	10c	90c	8.25



FLEXIBLE METALLIC CONDUIT



GREENFIELD				
No.	Size	Coils	1 Ft.	100 Ft.
W1309	1/2 in.	50 ft.	6 1/2 c	4.80
W1310	1/2 in.	100 ft.	6 1/2 c	4.80
W1311	3/4 in.	50 ft.	8c	6.15
W1312	1 in.	50 ft.	17 1/2 c	13.14
W1313	1 1/4 in.	50 ft.	21 1/2 c	16.35



GREENFIELD CONNECTORS

No.	Size	Each	20, Ea.	100
F1314	1/2 in.	6c	5 3/4 c	5.45
F1315	3/4 in.	9c	8c	7.85
No.	Size	Each	5, Ea.	10, Ea.
F1316	1 in.	15c	13c	12 1/2 c
F1317	1 1/4 in.	23c	19 1/2 c	16c

ANGLE CONNECTORS

Squeeze type angle connectors with removable cap.

No.	Size	Each	20, Ea.	100
F1318	3/8 in.	7 1/2 c	7c	6.75
F1319	1/2 in.	15c	13c	10.50
F1320	3/4 in.	24c	5, Ea. 22c	50, Ea. 17 1/2 c
F1321	1 in.	38c	33c	25, Ea. 27c
F1322	1 1/4 in.	49c	42c	10, Ea. 35c
F1323	1 1/2 in.	72c	61c	51c



APPROVED B X CONNECTORS



Set Screw Type

Squeeze Type

No.	Type	Each	100	1000
F1324	3/8 in. Set Screw	2 1/2 c	1.95	17.50
F1325	3/8 in. Squeeze	2 3/4 c	2.25	20.50

UNIVERSAL TYPE CONNECTOR



An all-purpose connector. Will serve a multitude of uses. Will fit B X, most all sizes, rubber cords and 3/8-inch greenfield.

No.	Each	100	1000
F1326	3c	2.50	23.00

TWIN B X CONNECTOR

For bringing two pieces of B X into one knockout. Set screw type.

No.	Each	20, Ea.	100
F1327	6c	5 1/2 c	5.39



Non-Metallic Sheathed Cable Connector




Quick and simple to install. K/O size, 1/2 inch.

No.	Each	100
F1328	4c	3.04

NEW "LOX BOX" CONNECTOR


Easy to install. Requires no locknuts. Perfect ground. Set screw take-up tightens connector rigidly to box. For B X and 3/8-inch greenfield. Fits into 1/2-inch knockout.

No.	Each	100	1000
F1329	4c	3.03	24.25



LAMP, FIXTURE and PORTABLE CORD

RUBBER COVERED LAMP CORD

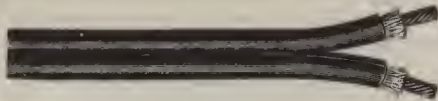

TWIN CONDUCTOR

Twin conductor flexible rubber lamp cord. No. 18 parallel conductors are rubber covered and joined together by a special process that makes it possible to separate with the fingers. Will outlive any cord on the market. Available in maroon, black, brown, green, ivory and white. Specify.

No.	Size	1 Ft.	250 Ft.	1000 Ft.
W1200	18-2	1 1/4c	2.25	8.00

SILK PARALLEL LAMP CORD



This quality lamp cord has two stranded conductors of No. 18 wire, each covered with rubber and a silk colored overall covering. Approved by Underwriters. Put up in 250-foot spools. Available in ivory, white, brown, green, gold and black. Specify.

No.	Size	1 Ft.	250 Ft.	1000 Ft.
W1201	18-2	1 1/4c	2.38	9.00

TWISTED LAMP CORDS



Tightly woven soft cotton covering over live rubber insulation on No. 18 stranded conductor. Both wires are evenly twisted together. This is a wire item that is always in demand.

No. 18, 1/2-inch Heavy Green and Yellow

No.	Size	1 Ft.	250 Ft. Spool	1000 Ft.
W1202	1 1/4c		2.45	9.00
No. 18, 1/4-inch Green and Yellow				
W1203	1c		4.40	8.25

3-CONDUCTOR KITCHEN UNIT CORD



To wire a combination switch and receptacle from a fixture. Has grey silk covering and each No. 18 conductor is color braided.

No.	1 Ft.	100 Ft.	250 Ft. Coil
W1204	3c	2.75	5.72

No. 18 FIXTURE CORD




Cotton covered—has 1/4-inch insulation. Stranded. Easy to wire. Supplied on 1000-foot spools.

No.	Color	100 Ft.	500 Ft.	1000 Ft.
W1205	Oak Tan	55c	2.25	4.20
W1206	Brown	55c	2.25	4.20
W1207	White	55c	2.25	4.20
W1208	O. T. with marker	55c	2.25	4.20
W1209	Br. with marker	55c	2.25	4.20

No.	Color	100 Ft.	500 Ft.	1000 Ft.
W1210	Oak Tan	65c	2.50	4.90
W1211	Brown	65c	2.50	4.90
W1212	White	65c	2.50	4.90
W1213	O. T. with marker	65c	2.50	4.90
W1214	Br. with marker	65c	2.50	4.90

Quantity price applies on assortment.

ALL RUBBER SERVICE CORD



Waterproof, non-absorbent and flexible. Each stranded conductor is covered with a soft rubber insulation and a thick, tough rubber insulation covers both conductors. For use on small motors, vacuum cleaners and other small appliances.

No.	Type	1 Ft.	100 Ft.	250 Ft.	1000 Ft.
W1215	No. 18, light	2c	1.50	3.35	12.70
W1216	No. 18, heavy	2 1/2c	2.00	4.50	17.00

We carry a complete stock of pole line hardware and equipment. Let us quote on your requirements.

REINFORCED CORD



Gives exceptional service when used indoors on vacuum cleaners and small appliances. Conductors are stranded, heavily insulated, and covered with an overall belt of cotton braid. Color, black.

No.	Type	1 Ft.	250 Ft. Coil	1000 Ft.
W1217	Light, 1/4 in.	1 1/4c	3.38	12.80
W1218	Heavy, 3/2 in.	2 1/2c	4.85	18.60

APPROVED HEATER CORD



Approved 3000-cycle, 41-strand copper wire No. 18 with cotton serving. Rubber covered wires

are heavily covered with asbestos. Black cotton cover is marked with a tracer.

No.	1 Ft.	100 Ft.
W1219	2 1/4c	1.82

ASBESTOS HEATER CORD

Standard quality construction. Cotton covered with silk tracer.

No.	Size	250 Ft.	1000 Ft.
W1220	No. 18	3.75	14.25
W1221	No. 16	4.80	17.80
W1222	No. 14	5.78	21.85

Send for our complete lighting fixture catalog. Every dealer and contractor will find it a valuable aid in obtaining new business.

TWISTED TELEPHONE WIRE



Conductor size No. 19 wire. Indoor type dry cotton braided, weatherproof type saturated braid.

INDOOR TYPE

No.	Size	1 Ft.	100 Ft.	1000 Ft.
W1223	19-2 cond.	2c	1.40	11.00
W1224	19-3 cond.	3c	2.54	19.00

OUTDOOR TYPE

No.	Size	1 Ft.	100 Ft.	1000 Ft.
W1225	19-2 cond.	2c	1.45	11.50
W1226	19-3 cond.	3c	2.60	20.10

BREWERY CORD




Special cord weatherproofed with an insulating compound so that it can be used in damp locations.

No.	No. 18	1 Ft.	250 Ft. Coil	1000 Ft.
W1227	2-conductors	1 1/2c	2.98	11.30

RIGID CONDUIT and CONDUIT FITTINGS

Rigid Heavy Wall Conduit




BLACK ENAMEL

No.	Size	Lbs. per M Ft.	Cost per 100 Ft.
Z1870	1/2 in.	852	4.85
Z1871	3/4 in.	1134	6.21
Z1872	1 in.	1684	8.92
Z1873	1 1/4 in.	2281	12.12
Z1874	1 1/2 in.	2731	14.45
Z1875	2 in.	3678	19.44
Z1876	2 1/2 in.	5819	30.75
Z1877	3 in.	7616	40.25

GALVANIZED

No.	Size	Lbs. per M Ft.	Cost per 100 Ft.
Z1880	1/2 in.	852	5.53
Z1881	3/4 in.	1134	7.30
Z1882	1 in.	1684	10.10
Z1883	1 1/4 in.	2281	13.87
Z1884	1 1/2 in.	2731	16.59
Z1885	2 in.	3678	22.31
Z1886	2 1/2 in.	5819	35.99
Z1887	3 in.	7616	46.95



Conduit Elbows

BLACK ENAMEL

No.	Size	Per 100
Z1900	1/2 in.	11.83
Z1901	3/4 in.	15.52
Z1902	1 in.	23.18
Z1903	1 1/4 in.	32.49
Z1904	1 1/2 in.	45.59
Z1905	2 in.	72.85
Z1906	2 1/2 in.	129.49
Z1907	3 in.	278.39

GALVANIZED

No.	Size	Per 100
Z1910	1/2 in.	13.68
Z1911	3/4 in.	17.95
Z1912	1 in.	26.87
Z1913	1 1/4 in.	37.35
Z1914	1 1/2 in.	52.87
Z1915	2 in.	84.58
Z1916	2 1/2 in.	152.29
Z1917	3 in.	323.98

Conduit Couplings

BLACK ENAMEL

No.	Size	Per 100
Z1920	1/2 in.	5.09
Z1921	3/4 in.	7.27
Z1922	1 in.	9.51
Z1923	1 1/4 in.	13.58
Z1924	1 1/2 in.	16.68
Z1925	2 in.	22.31
Z1926	2 1/2 in.	31.72
Z1927	3 in.	47.53

GALVANIZED

No.	Size	Per 100
Z1930	1/2 in.	5.63
Z1931	3/4 in.	8.05
Z1932	1 in.	10.48
Z1933	1 1/4 in.	14.78
Z1934	1 1/2 in.	18.24
Z1935	2 in.	24.54
Z1936	2 1/2 in.	35.21
Z1937	3 in.	52.77

Iron Conduit Bushings



No.	Size	Less than C, Per C	100 or more Per C
Z1950	1/2 in.	76c	62c
Z1951	3/4 in.	1.23	96c
Z1952	1 in.	2.64	2.12
Z1953	1 1/4 in.	4.45	3.56
Z1954	1 1/2 in.	5.09	4.07
Z1955	2 in.	6.85	5.98
Z1956	2 1/2 in.	11.32	9.20
Z1957	3 in.	18.45	14.76

Iron Conduit Locknuts

No.	Size	Less than C, Per C	100 or more Per C
Z1940	1/2 in.	52c	41c
Z1941	3/4 in.	72c	58c
Z1942	1 in.	1.37	1.10
Z1943	1 1/4 in.	2.27	1.82
Z1944	1 1/2 in.	2.76	2.20
Z1945	2 in.	4.06	3.73
Z1946	2 1/2 in.	10.80	8.64
Z1947	3 in.	16.13	12.90



Minnerallac Hangers



No.	Size	Each	100
Z1958	1/2 in.	3 1/2c	2.87
Z1959	3/4 in.	4c	3.16
Z1960	1 in.	5c	4.16
Z1961	1 1/4 in.	5 1/2c	4.54
Z1962	1 1/2 in.	6 1/2c	5.61
Z1963	2 in.	7 1/2c	6.04

Conduit Reducing Bushing



CADMIUM PLATED. Threaded and bushed.

No.	Size	Ea.	Ea.
Z1964	3/4" to 1/2"	8c	7c
Z1965	1" to 1/2"	10c	9c
Z1966	1" to 3/4"	10c	9c

Galvanized Iron Conduit Straps



No.	Size	Approx. to Lb.	Lb.	5 Lb.
Z1948	1/4 in.	77	9c	40c
Z1967	3/8 in.	62	9c	40c
Z1968	1/2 in.	35	9c	40c
Z1969	3/4 in.	21	9c	40c
Z1878	1 in.	14	9c	40c
Z1879	1 1/4 in.	11	9c	40c
Z1970	1 1/2 in.	9	9c	40c



1 Hole Malleable Clamps

For Heavy Wall Conduit.

No.	Size	Each	100
Z1971	1/2 in.	1 1/2c	1.31
Z1972	3/4 in.	2 1/2c	1.88
Z1973	1 in.	3c	2.35
Z1974	1 1/4 in.	5c	3.96
Z1975	1 1/2 in.	8c	6.51
Z1976	2 in.	18c	14.51

1 Hole Jiffy Clamps

For Heavy Wall Conduit.

Made of heavy galvanized strap steel.

No.	Size	Each	100
Z1977	1/2 in.	1 1/2c	1.16
Z1978	3/4 in.	2c	1.68
Z1979	1 in.	3c	2.50
Z1980	1 1/4 in.	4c	3.33



Conduit Bending Tool

For rigid conduit. Extra durable. Won't kink pipe.



No.	Size	Ea.
Z1981	1/2 in.	1.39
Z1982	3/4 in.	1.51

Conduit Fish Wire

1/8 inch wide by .060 gauge. Hooked end. An item needed in every wireman's kit. 100-foot coils.

No.	Each
Z1983	1.05



"Red Devil" Fish Wire Puller



Handy for pulling wires through conduit. Sure grip.



No.	Each
Z1984	50c

Rigid Heavy Wall Fittings

THREADLESS APPROVED



Coupling

CONNECTORS

Connector

No.	Size	Each	50 Ea.	100
Z1985	1/2 in.	15 1/2c	12c	9.70
Z1986	3/4 in.	25c	20c	15.77
Z1987	1 in.	54 1/2c	42 1/2c	33.95

COUPLINGS

No.	Size	Each	50 Ea.	100
Z1988	1/2 in.	26c	20 1/2c	16.30
Z1989	3/4 in.	39c	30c	24.25
Z1990	1 in.	66c	52c	41.23

Conduit Nipples

Clean cut threads. Galvanized.



1/2 INCH SIZE PIPE

No.	Length	Each	10 Asst.
Z1991	2 in.	5 1/2c	4 1/2c
Z1992	3 in.	6c	5 1/2c
Z1993	4 in.	6 1/2c	6c
Z1994	5 in.	7 1/2c	6 1/2c
Z1995	6 in.	9c	8c
Z1996	8 in.	11c	10c

3/4 INCH SIZE PIPE

1 INCH SIZE PIPE

No.	Lgth.	Ea.	10, Asst.
Z1997	2 in.	5 1/2c	5c
Z1998	3 in.	5 1/2c	6c
Z1999	4 in.	6c	8c
Z2015	5 in.	8c	10 1/2c
Z2016	6 in.	9c	12 1/2c
Z2017	8 in.	12c	14 1/2c

Chase Nipples

Steel-Cadmium.




No.	Size	Each	100
Z2024	1/2 in.	3 1/2c	2.80
Z2025	3/4 in.	5c	4.40
Z2026	1 in.	10c	8.41
Z2027	1 1/4 in.	12c	10.00
Z2028	1 1/2 in.	13c	10.91
Z2029	2 in.	22c	17.88

Conduit Reducing Washers

Galvanized Steel

No.	Size	Ea.	100
Z2030	3/4" to 1/2"	9 1/2c	50c
Z2031	1" to 3/4"	1 1/4c	88c
Z2032	1" to 1/2"	1 1/4c	88c
Z2033	1 1/4" to 1"	1 1/4c	1.25
Z2034	1 1/4" to 3/4"	1 1/4c	1.25
Z2035	1 1/4" to 1"	1 1/4c	1.25



Knockout Seals

Snap into place immediately to close up open knockouts in service or outlet boxes.

No.	K/O Size	Ea.	100
Z2036	1/2 in.	2 1/2c	1.88
Z2037	3/4 in.	3c	2.50
Z2038	1 in.	6c	5.00

Fixture Stud



3/4 inch outside thread—1/4 inch inside thread. Easily wired.

No.	Each	100
Z2039	2 1/2c	2.15

No Bolt Fixture Stud



Slips through knockout in box and locks up without use of bolts. Saves time.

No.	Each	100
Z2040	3 1/2c	3.25

Bondrite Bushing

Malleable iron with copper lug and brass screw.



No.	Size	Type	Ea.	10, Ea.
Z2041	1/2 in.	Locking	8 1/2c	6 1/2c
Z2042	3/4 in.	Locking	10c	8c
Z2043	1 in.	Locking	16 1/2c	13c
Z2044	1 1/4 in.	Locking	18 1/2c	15c
Z2045	1 1/2 in.	Locking	25 1/2c	20 1/2c
Z2046	2 in.	Locking	37 1/2c	30c
Z2047	2 1/2 in.	Non-locking	61c	49c
Z2048	3 in.	Non-locking	77c	62c

THINWALL CONDUIT—FITTINGS and TOOLS

E. M. T. THINWALL CONDUIT



No.	Size	100 Ft.
Z1801	1/2 inch	3.55
Z1802	3/4 inch	4.96
Z1803	1 inch	6.81
Z1804	1 1/4 inch	9.50
Z1805	1 1/2 inch	10.73
Z1806	2 inch	14.03

THINWALL ELBOWS

No.	Size	Each
Z1807	1 inch	18c
Z1808	1 1/4 inch	26c
Z1809	1 1/2 inch	34c
Z1810	2 inch	64c

THINWALL CONDUIT FITTINGS



THREADLESS
WATER-TITE
CADMIUM
PLATED



No.	Connector	Size	Ea.	50, Ea.	100
Z1811		1/2 inch	9c	8c	7.13
Z1812		3/4 inch	12c	11c	9.70
Z1813		1 inch	18c	16c	14.31
Z1814		1 1/4 inch	43c	41c	37.10
Z1815		1 1/2 inch	55c	52c	47.43
Z1816		2 inch	88c	83c	74.20

COUPLINGS

No.	Size	Ea.	50, Ea.	100
Z1821	1/2 inch	8c	7c	6.11
Z1822	3/4 inch	10c	9c	8.44
Z1823	1 inch	18c	16c	14.31
Z1824	1 1/4 inch	43c	41c	37.10
Z1825	1 1/2 inch	55c	52c	47.43
Z1826	2 inch	88c	83c	74.20

E. M. T. ADAPTERS

Any threaded rigid conduit fitting will take Electrical Metallic Tubing (Thin Wall Conduit) with the use of this adapter.

No.	Size	Ea.	50, Ea.	100
Z1831	1/2 inch	4 1/2 c	3 3/4 c	3.44
Z1832	3/4 inch	6 1/2 c	5 3/4 c	5.19
Z1833	1 inch	10 1/2 c	9 1/2 c	8.54
Z1834	1 1/4 inch	19c	17 1/2 c	16.00
Z1835	1 1/2 inch	24c	22c	19.98
Z1836	2 inch	31c	29c	26.68



E. M. T. WATER-TITE SHORT ELBOW

90° for Thinwall Conduit
Underwriters Approved.

No.	Size	Ea.	50, Ea.	100, Ea.
Z1827	1/2 in.	29c	23c	18.50
Z1828	3/4 in.	46 1/2 c	36 1/2 c	29.10
Z1829	1 in.	58c	47c	36.40




HANDY NEW UTILITY TOOL



Indispensable for use in Electrical Metallic Tubing work. With two of these tools you can tighten nuts on couplings, remove burrs from conduit, ream for a smooth edge, and tighten nut at outlet box. No other tools needed for these operations. For 1/2 inch and 3/4 inch E. M. T.

No.	Ea.	12, Ea.
Z1820	90c	75c

Briegel Method Fittings for Thinwall



Considerably less expensive than regular fittings. Fittings are slipped on end of Thinwall and attached with indenter tool. Will not loosen or twist. Approved. Fittings are finished in heavy cadmium.



No.	Size	Each	50, Ea.	100
Z1840	1/2 inch	6 1/2 c	5 1/2 c	5.12
Z1841	3/4 inch	9 1/2 c	8 1/2 c	7.47
Z1842	1 inch	16c	14 1/2 c	13.02

BRIEGEL CONNECTORS

No.	Size	Each	50, Ea.	100
Z1843	1/2 inch	5 1/2 c	5c	4.58
Z1844	3/4 inch	7 1/2 c	6 1/2 c	5.98
Z1845	1 inch	12c	10 3/4 c	9.60

BRIEGEL COUPLINGS

No.	Size	Each	50, Ea.	100
Z1843	1/2 inch	5 1/2 c	5c	4.58
Z1844	3/4 inch	7 1/2 c	6 1/2 c	5.98
Z1845	1 inch	12c	10 3/4 c	9.60

BRIEGEL INDENTER TOOL

Makes two indentations at one time. Jaw for use only with 1/2 inch Thinwall Conduit Sturdily Built.

No.	Each
Z1846	\$1.33

THINWALL CONDUIT BENDERS

Designed especially for Electric Metallic Tubing. Makes 90° bends exactly in the right place with very little effort.



No.	Size	Each
Z1847	1/2 inch	2.01
Z1848	3/4 inch	3.00
Z1849	1 inch	4.67

THINWALL CONDUIT HICKEY




Deep, close fitting bending groove grips the conduit automatically and prevents kinking, flattening and slipping.

No.	Size	Each
Z1850	1/2 inch	1.44
Z1851	3/4 inch	1.82

COMBINATION COUPLING

For connecting flexible metallic conduit or armored bushed cable to Thinwall conduit.



No.	Size	Ea.	10, Ea.	50, Ea.
Z1852	1/2 Tw.—B X	19c	17c	15 1/2 c
Z1853	1/2 Tw.—1/2 in. Flex.	19 1/2 c	18c	16c
Z1854	3/4 Tw.—3/4 in. Flex	29c	26 1/2 c	24c

Thinwall Conduit Cutter

with Reamer



For use on Thinwall conduit, lead, brass, and copper tubing. Will not tear tubing.

No.	Size	Each
Z1855	1/2 in. to 5/8 in. O.D.	1.40
Z1856	1/2 in. to 1 1/4 in. O.D.	1.75
Z1857	1 in. to 2 in. O.D.	2.80

MALLEABLE 1-HOLE THINWALL CLAMPS



No.	Size	Each	100
Z1860	1/2 inch	2c	1.21
Z1861	3/4 inch	3c	1.41
Z1862	1 inch	3 1/2 c	1.88
Z1863	1 1/4 inch	6 1/2 c	4.21
Z1864	1 1/2 inch	9c	5.86
Z1865	2 inch	20c	13.05

DRIVE-IT THINWALL CLAMPS

Simply drive into wall. Holds thinwall securely without screws or bolts. Malleable.

No.	Size	Each	100
Z1866	1/2 inch	1c	87c
Z1867	3/4 inch	1 1/2 c	1.11
Z1868	1 inch	2 1/2 c	1.79



OUTLET BOXES and COVERS



OCTAGON BOXES

Quality boxes with clean knockouts. Underwriters' approved.

3/4-INCH OCTAGON BOXES


Black				Galvanized			
No.	K/O's	Each		No.	K/O's	Each	
B925	1/2 in.	5c	100	B927	1/2 in.	5 1/2c	100
B926	3/4 in.	6 3/4c	5.85	B928	3/4 in.	7 1/4c	6.08

Black				Galvanized			
No.	K/O's	Each		No.	K/O's	Each	
B929	1/2 in.	7 3/4c	6.95	B931	1/2 in.	8 1/4c	7.50
B930	3/4 in.	10c	8.55	B932	3/4 in.	11c	9.23

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B933	3 1/4 in.	14c	11.88	B935	3 1/4 in.	14 1/2c	12.60
B934	4 in.	14c	11.88	B936	4 in.	14 1/2c	12.60

EXTENSION RINGS 1/2-INCH K/O's

4-INCH SQUARE BOXES



Approved by Underwriters' Laboratory. Easy-out knockouts. Depth of box, 1 1/2 inches.

Black				Galvanized			
No.	K/O's	Each		No.	K/O's	Each	
B979	1/2 in.	9c	100	B981	1/2 in.	9 1/2c	8.93
B980	3/4 in.	11 1/4c	9.90	B982	3/4 in.	12 1/2c	10.58

Black				Galvanized			
No.	K/O's	Each		No.	K/O's	Each	
B983	1/2 in.	14 1/2c	12.60	B984	1/2 in.	15 1/4c	13.50

SQUARE EXTENSION RINGS — 1 1/2 INCH DEEP

RAISED COVERS AND PLASTER RINGS



Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B937	3 1/4 in.	3c	100	B939	3 1/4 in.	3 3/4c	2.84
B938	4 in.	4c	3.19	B940	4 in.	4 1/4c	3.47

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B941	3 1/4 in.	3c	100	B943	3 1/4 in.	3 3/4c	2.84
B942	4 in.	4c	3.60	B944	4 in.	4 1/4c	3.78

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B945	3 1/4 in.	3 3/4c	3.15	B947	3 1/4 in.	4c	3.47
B946	4 in.	4 1/4c	3.60	B948	4 in.	4 1/2c	3.78

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B949	3 1/4 in.	3 3/4c	2.70	B951	3 1/4 in.	3 3/4c	2.84
B950	4 in.	4 1/4c	3.60	B952	4 in.	4 1/2c	3.78

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B953	4 in.	4 1/4c	3.60	B954	4 in.	4 1/2c	3.78

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B955	4 in.	6 1/4c	5.18	B956	4 in.	7c	5.85

FLAT COVERS



Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B917	3 1/4 in.	3 3/4c	2.70	B959	3 1/4 in.	3 3/4c	2.84
B918	4 in.	4c	3.29	B960	4 in.	4 1/4c	3.47

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B961	3 1/4 in.	4c	3.29	B963	3 1/4 in.	4 1/4c	3.47
B962	4 in.	4 1/4c	3.60	B964	4 in.	4 1/2c	3.78

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B965	3 1/4 in.	2 3/4c	2.25	B967	3 1/4 in.	2 3/4c	2.34
B966	4 in.	3 1/4c	2.93	B968	4 in.	3 1/2c	3.06

4-INCH CONDUIT CEILING BOXES



Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B969	1/2 in.	5c	100	B970	1/2 in.	5 1/2c	4.50
B971	3/4 in.	5 1/2c	5.05	B972	3/4 in.	5 3/4c	5.18

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B973	1/2 in.	4 3/4c	4.10	B974	1/2 in.	5 1/2c	4.28
B975	3/4 in.	5 1/2c	4.50	B976	3/4 in.	5 3/4c	4.73

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B977	1/2 in.	4 3/4c	3.87	B978	1/2 in.	4 3/4c	4.05

We pay the freight on all orders of \$50.00 or more.

SWITCH AND RECEPTACLE COVERS



Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1054	1/2 in.	7c	5.85	B1055	1/2 in.	7 1/4c	6.30
B1056	3/4 in.	7 3/4c	6.30	B1057	3/4 in.	8c	6.75
B1058	1 in.	8 1/2c	7.20	B1059	1 in.	9 1/2c	7.88

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1060	1/2 in.	9 1/4c	7.88	B1061	1/2 in.	10 1/2c	8.55
B1062	3/4 in.	9 3/4c	8.10	B1063	3/4 in.	10 3/4c	9.00

4-INCH RAISED COVERS



Toggle



Duplex



Combination

New style switch and receptacle covers for exposed work. Fits 4-inch square boxes. Complete raise on all sides permits maximum wiring space.

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1064	1/2 in.	8c	25, Ea.	B1065	1/2 in.	9c	25, Ea.


Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1066	1/2 in.	8c	25, Ea.	B1067	1/2 in.	9c	25, Ea.

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1068	1/2 in.	10c	25, Ea.	B1069	1/2 in.	10 1/4c	25, Ea.

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1070	1/2 in.	10c	25, Ea.	B1071	1/2 in.	10 1/4c	25, Ea.

Black				Galvanized			
No.	Size	Each		No.	Size	Each	
B1072	1/2 in.	10c	25, Ea.	B1073	1/2 in.	10 1/4c	25, Ea.

SWITCH BOXES, COVERS and HANGERS



Regular Handy Box

Measures 4 inches long, 2½ inches wide and 1½ inches deep. Equipped with 3 knockouts on each side and bottom and one on each end for ½-inch conduit. Galvanized.

No.	Each	10, Ea.	50 Lots, Per 100
Z2049	9c	8½c	8.10

Handy Box Covers



Will fit any standard handy box.

TOGGLE COVER			
No.	Each	10, Ea.	
Z2050	3½c	3¼c	
SINGLE RECEPTACLE			
No.	Each	10, Ea.	
Z2051	3½c	3¼c	
DUPLEX COVER			
No.	Each	10, Ea.	
Z2052	3½c	3¼c	
PUSH COVER			
No.	Each	10, Ea.	
Z2053	3½c	3¼c	
BLANK COVER			
No.	Each	10, Ea.	
Z2054	3½c	3c	

Straight Bar Hanger



For use with ceiling boxes on new work. Furnished complete with stud.

No.	Each	100
Z2055	8c	6.85

Cleat Hanger



For mounting boxes in flush position nail across front of studding.

No.	Each	100
Z2056	5½c	4.90

Offset Bar Hanger



Brings 1½-inch boxes with standard cover flush with plaster.

No.	Each	100
Z2057	9c	8.00

Old Work Hanger



Ideal for installing boxes in old work. Small hole in plaster all that is necessary.

No.	Each	100
Z2058	8½c	7.25

Kruse Switch Box Hangers



Saves time and money.

No.	Pair	100 Pr.
Z2059	9c	8.07



Combination Loom and B X Ceiling Box

Has 4 B X or loom K/os. 3½ inches in diameter by ¼ inch deep. Galvanized. Has ¾ inch fixture stud.

No.	Each	100
Z2060	11c	9.45
With ½-Inch Center K/O and Clamps		
No.	Each	100
Z2061	9½c	8.10

Deep B X and Loom Ceiling Box



Measures 3½ in. in diameter and 1½ in. deep. Has ¾ in. Fixture stud. Clamps and Bushing Plates for B X or loom. Standard finish, galvanized.

No.	Each	100
Z2062	14½c	12.02

Set-Up Box



On Offset Bar Hanger. Box measures 3½ inches round and 1½ inches deep. Has combination clamps and bushing plates for B X or loom. ¾ stud.

BLACK ENAMEL		
No.	Each	25, Ea.
A2065	20c	17½c
GALVANIZED		
No.	Each	25, Ea.
A2066	21c	18c

Switch Box for Non-Metallic Sheathed Cable



Size: 2x3 in., 2½ in. deep. For use with all types of non-metallic sheathed and rubber cables.

Especially adaptable in Rural Electrification districts. Two-piece clamps protect raceway from sharp edges after the K/os have been removed.

BLACK ENAMEL		
No.	Each	100
Z2063	10½c	9.72
GALVANIZED		
No.	Each	100
Z2064	11c	10.22

Round Ceiling Boxes for Non-Metallic Sheathed Cable

Used in rural electrification. Two piece clamps on each side of box. ¾-inch fixture stud in center. Has 2 ¾-inch K/os on opposite sides and 4 K/os in bottom. Has mounting ears.



BLACK ENAMEL		
No.	Each	50, Per
A2067	14½c	12.47
GALVANIZED		
No.	Each	50, Per
A2068	15½c	13.05

DEDUCT 2% CASH
DISCOUNT ON ALL ORDERS

B X Switch Boxes



Has square corners and B X clamp. Has 2 K/os on each corner. Especially adaptable for use in very shallow conditions. Size: 2x3½ in., 1½ in. deep Not gangable. Galvanized.

No.	Each	50, Per
Z2069	12½c	10.35

Conduit Switch Boxes

Sectional Type, can be ganged in any numbers. Measures 2½ in. deep. For ½ in. conduit.

BLACK ENAMEL

No.	Each	50, Per
Z2071	9c	8.33

GALVANIZED

No.	Each	50, Per
Z2072	9½c	8.78

SHALLOW TYPE — 2 in. Deep BLACK ENAMEL

No.	Each	50, Per
Z2073	8½c	7.88

GALVANIZED

No.	Each	50, Per
Z2074	9c	8.33

Wall Bracket Boxes

Adjustable

Adjustable fixture bridge threaded for ½ inch. Will take B X or loom. Size: 2x3½ in., 1½ in. deep. Galvanized.



No.	Each	50, Ea.
Z2075	12½c	10.35

Sectional Loom Boxes



Easily ganged. Furnished standard in heavy coat galvanized. Easy to install.

WITH CLAMPS


No.	Each	50, Per
Z2076	9½c	8.33

WITHOUT CLAMPS

No.	Each	50, Per
Z2077	8½c	7.88

Loom and Conduit Boxes

Furnished complete with bracket and lath holder. Galvanized.



LOOM TYPE Less Clamps

No.	Each	50, Per
Z2078	12½c	11.70

LOOM TYPE — with Clamps

No.	Each	50, Per
Z2079	13c	12.15

CONDUIT TYPE

No.	Each	50, Per
Z2080	13½c	12.38

Holdit Box Hangers



For use on sheet rock, metal lath, beaverboard, etc. Fastens switch box in place in less than a minute. No screws. Plate fits snug.

No.	Pair	100 Pr.
Z2081	4½c	4.00

SURFACE WIRING DEVICES—PORCELAIN FITTINGS

SURFEX, THE NEW SURFACE WIRING SYSTEM

Just Three Simple Things to Do — Mount the Device — Run the Wire —
Connect the Terminals. Takes the Place of Eight Operations.

New Safety — New Dependability — New Simplicity

Opens Up New Jobs in Farm Buildings, Garages, Basements, Etc.

Saves Time and Material

Made of Shock-Proof, Corrosion Proof Porcelain

Ideal for Use in the New Rural Electrification Districts.


Approved by the Utilities as well as the Underwriters Laboratories.

A Grounding Plate Under Each Device Permits the Grounding of the Entire
Installation Where Armored Cable is Required.

VIEWS SHOWING ACTUAL SURFEX HOOKUPS.




To control circuit from one point
—feed at light—use one two-wire
cable.

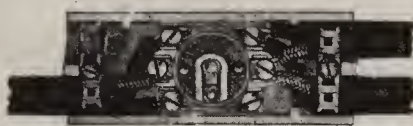

Light controlled by switch and two
live circuits carried on through.
Use one three-wire cable and two
two-wire cables.



A1546




A1548



A1549



A1550



A1551



A1552

A1553

PULL RECEPTACLE

250 watts — 250 volts

No.	Mfg. No.	Ea.	10, Ea.	50, Ea.
A1546	667	49c	43c	37c

KEYLESS RECEPTACLE

660 watts — 250 volts

No.	Mfg. No.	Ea.	10, Ea.	100, Ea.
A1547	666	41c	36c	31c

DUPLEX OUTFIT

15 amp. — 125 volts

No.	Mfg. No.	Ea.	10, Ea.	100, Ea.
A1548	670	41c	36c	31c

JUNCTION BOX

660 watts — 250 volts

No.	Mfg. No.	Ea.	10, Ea.	100, Ea.
A1549	669	37½c	33c	28½c

SINGLE POLE SWITCH

Dead End Toggle Type

5 amp. — 250 v. 10 amp. — 125 v.

No.	Mfg. No.	Ea.	10, Ea.	100, Ea.
A1550	660	33c	29c	25c

FEED-THRU SWITCH

5 amp. — 250 v. 10 amp. — 125 v.

No.	Mfg. No.	Type	Ea.	10, Ea.	50, Ea.
A1551	661	S. P.	45c	39½c	31c
A1552	664	3-way	49c	43c	37c

DROP CORD ROSETTE

660 watts — 250 volts

No.	Mfg. No.	Ea.	10, Ea.	50, Ea.
A1553	668	41c	36c	31c

GLAZED PORCELAIN SWITCH BOX COVERS



C240



C242



C241

For use with Standard Oblong Porcelain Switch Boxes. Screw holes set exact

GLAZED PORCELAIN TOGGLE SWITCH BOX COVER

No.	Each	10, Ea.
C240	8c	7c

GLAZED PORCELAIN PENDANT COVER

No.	Each	10, Ea.
C241	8c	7c

GLAZED PORCELAIN BLIND COVER

No.	Each	10, Ea.
C242	7c	6c

All Porcelain Octagon Boxes



Porcelain wiring as-
sures lasting safety.
No danger of shorts.

Inset tapped for 8/32 in. cover screws.
Not glazed.

No.	Size	Ea.	10, Ea.	100
B2000	3¼ in.	14c	13c	12.50
B2001	4 in.	19c	17c	16.75


All Porcelain Switch Box

Has 6/32 inset. Not
glazed.

No.	Ea.	10, Ea.	100
B2002	15c	13c	12.50



All Porcelain Utility Box



For use with switches
and receptacles. Not
glazed.

No.	Ea.	10, Ea.	100
B2003	15c	13c	12.50

Porcelain Outlet Box Covers



C2004



C2006

DUPLEX RECEPTACLES

Complete, ready to install.

No.	Size	Ea.	10, Ea.	100
C2004	3¼ in.	15c	13c	12.50
C2005	4 in.	20c	17c	16.75

SURFACE SWITCH COVERS

No.	Size	Ea.	10, Ea.	100
C2006	3¼ in.	8c	7c	6.75
C2007	4 in.	11c	10c	9.50

Porcelain Covers



C2008



C2009


GLAZED PORCELAIN BLIND COVER

No.	Size	Ea.	10, Ea.	100
C2008	3¼ in.	7c	6c	5.75
C2009	4 in.	10c	9c	8.50

Glazed Porcelain Bushed Cover

No.	Size	Ea.	10, Ea.	100
C2010	3¼ in.	8c	7c	6.75
C2011	4 in.	11c	10c	9.50

UTILITY COVER




Keyless receptacle base
in glazed porcelain.

No.	Ea.	10, Ea.	100
C2012	17c	16c	14.95

UTILITY COVER

Duplex receptacle in
glazed porcelain.

No.	Ea.	10, Ea.	100
C2013	15c	14c	13.50



CONDUIT FITTINGS—GROUNDING FITTINGS

Service Heads



WITH 3 HOLE COVER

No.	Size	Each	10, Ea.
F2251	1/2 in.	19c	17c
F2252	3/4 in.	24c	22c
F2253	1 in.	31c	29c
F2254	1 1/4 in.	46c	42c
F2255	1 1/2 in.	71c	63c
F2256	2 in.	1.70	1.55
F2257	2 1/2 in.		3.94
F2258	3 in.		6.55

Type A Electrolets



For indoor use only on motors, meter loops, and all types of combination work. Cover is three hole type.

No.	Size	Each	100
F2259	1/2 inch	7 1/2c	6.15
F2260	For BX	9c	7.40

New Rea Approved Entrance Cap


For outbuilding service entrance. Flanged for flush job. Includes 3 galvanized screws and Dux-seal compound.



No.	Each	20, Ea.
F2261	39 1/2c	37c

Capped Elbows

For heavy wall rigid conduit.



No.	Size	Each	10, Ea.
F2262	1/2 in.	27c	18c
F2263	3/4 in.	44c	21c
F2264	1 in.	57c	35c
F2265	1 1/4 in.	1.10	65c
F2266	1 1/2 in.	1.27	1.15

Entrance Ells



Malleable iron. Easy to install. Neat in appearance.

No.	Size	Each	10, Ea.
F2267	1/2 in.	24c	20c
F2268	3/4 in.	26c	22c
F2269	1 in.	34c	30c
F2270	1 1/4 in.	60c	52c

Copper Weld Ground Rods



Will stand up under any soil conditions and will not bend when driven.

No.	Dia.	Length	Each	10, Ea.
F2271	1/2 in.	8 ft.	1.10	1.00
F2272	1/2 in.	10 ft.	1.37	1.21
F2273	3/4 in.	8 ft.	1.68	1.47
F2274	3/4 in.	10 ft.	2.02	1.75

GROUND ROD CLAMPS

No.	Size	Each	10, Ea.
F2275	1/2 in.	21c	19c
F2276	3/4 in.	27c	24c

Solderless Lugs



Makes perfect connections. Has Underwriters' approval. No special tools needed.

Does not cut into wire.

No.	Amps.	Wire Size	Each	100
F2277	35	8 to 14	4 1/2c	3.50
F2278	70	4 to 8	6c	5.20
F2279	125	0 to 2	8 1/2c	8.25
F2280	225	4/0 to 2/0	30c	25.75

Copper Solder Lugs



Underwriters approved.

No.	Amps.	Wire Size	Each	100
F2281	25	10	1 3/4c	1.50
F2282	35	8	2 1/4c	1.75
F2283	50	6	3c	2.65
F2284	70	4	4c	2.95
F2285	90	2	5c	4.00
F2286	125	0	6 1/2c	5.30
F2287	150	2/0	8 1/2c	6.85
F2288	175	3/0	11 1/2c	9.45
F2289	225	4/0	14 1/2c	11.75

Copper Ground Clamp




3/4 inch wide and has receptacle for soldering wire.

NEW CODE

No.	Size	Each	100
F2290	3/8 in. to 1 in.	4c	3.35
F2291	3/8 in. to 2 in.	6c	4.85

New Code Ground Fitting

Has copper strip. Adjusts to conditions where pipes are at irregular angles. Takes 1/2 inch ground conduit and 1/2 inch to 1 inch water pipe.



No.	Each	10, Ea.
F2292	37c	33c

Ground Wire Fitting



Takes armored bare ground wire sizes 8, 6, or 4. With wire looped around screw in groove you have a perfect connection.

No.	Each	10, Ea.
F2293	20c	18c

Porcelain Tubes



Uniformly moulded—clean holes. Not glazed.

No.	Length	Each	100	Per 100
M2085	3 in.	1c	57c	50c
M2086	4 in.	1c	65c	60c
M2087	6 in.	2c	1.10	1.00
M2088	12 in.	4c	3.00	

House Brackets



Heavy galvanized metal parts. Strong glazed porcelain insulators. Completely weather protected.

No.	Point	Each	25, Ea.	100
M2089	2	47c	43c	39.00
M2090	3	68c	64c	60.00

Heavy Duty Wireholders

Made of heavily glazed best grade porcelain. Screw is hot galvanized and is anchored into porcelain with cement and hot lead. Screw size # 20 x 2".



No.	Each	50, Ea.	100
M2091	15c	14c	13.50

Glazed Porcelain Nail-it Knobs



Complete with leather washer and nail. A time saver for temporary work. For 2 wires.


No.	Each	100	500
M2092	2c	1.35	Per 100 1.20

Ackerman Johnson Screw Anchors



Use for attaching objects to brick walls, steel, concrete, tile, etc. Packed 50 to box.

No.	Size	Each	50, per C
M2093	1/4 x 20	4c	3.24
M2094	3/8 x 16	7c	5.40
M2095	10 x 24	3c	2.24



Toggle Bolts

Specify style desired. If no style is specified on your order our shipping department will send style A.

No.	Size	Each	100
M2096	3/8 x 3 in.	4 1/2c	3.30
M2097	3/8 x 4 in.	4 1/2c	3.50

Porcelain Bushings




Fits in knockout and locks up firmly. Constructed for maximum durability.

No.	K/O Size	Each	100
M2098	1/2 inch	4c	3.15
M2099	3/4 inch	5c	4.10

WE WILL PROMPTLY SUPPLY ANY ELECTRICAL MATERIAL OR APPLIANCES NOT LISTED IN THIS CATALOG AT CURRENT WHOLESALE PRICE—SEND US YOUR ORDERS.

Porcelain Cleats



Will take 2 or 3 wires. Sold in pairs.

No.	Price	100	500
M2299	2c	1.75	Per 100 1.50

SERVICE ENTRANCE FITTINGS, CUTOUTS, ETC.

ENTRANCE CAPS

For Service Entrance Cable. One mounting screw. Entirely rust-proof. Perfect water drip. Cable held in position by one screw. Will take oval entrance cable 3-conductor No. 8, No. 6, or No. 4.

No.	Each	5, Ea.	10, Ea.
F160	29c	28c	27c



PLUG TYPE CUTOUTS



High quality glazed porcelain bases. Screws and fuse shells brass.

No.	Type	Each	10, Ea.
F178	Single pole, main line	14c	12c
F179	Double pole, main line	18c	15c
F180	3 pole, main line	31c	28c
F181	Double pole, single branch	18c	16c
F182	Double pole, double branch	34c	28c
F183	3 wire, double branch	63c	54c
F184	3 to 2 wire, double branch	40c	30c



WATERTITE CONNECTORS


For 3-conductor service cable. Where outside meter box is used and cable runs into top of it. Forms a perfect watertight connection. Locknut not included.

No.	Thread	Cond.	Each	10, Ea.	100
F161	3/4 in.	No. 8	23c	18c	14.10
F162	1 in.	No. 6	31c	25c	19.80
F163	1 in.	No. 4	31c	25c	19.80

Non-Watertite Oval Service Cable Connector

For No. 8—3-conductor and No. 6—3-conductor service entrance cable. Fits cable snug and provides a positively firm connection. For use inside the building.

No.	Each	10, Ea.	100
F164	10c	9c	8.68



ENTRANCE CABLE CLAMPS

One-hole malleable iron, cadmium plated cable strap for use on service entrance cable. Fits standard oval cable.

No.	Each	10, Ea.	100
F165	3c	2c	1.88

CUTOUT BOXES

Standard boxes approved by N. E. C. All boxes 4 inches deep except as noted.

No.	Inches	Each	10, Ea.
F166	4 1/2 x 5 x 3	35c	32c
F167	4 1/2 x 9 x 3	41c	38c
F168	8 x 6	55c	51c
F169	8 x 12	82c	76c
F170	8 x 10	76c	70c
F171	10 x 12	99c	91c
F172	12 x 18	1.50	1.38
F173	10 x 15	1.20	1.10



ENTRANCE SWITCHES

A 4x9-inch box accommodates this switch. Base is strong, glazed porcelain.

No.	Each	10, Ea.	50, Ea.
F174	35c	34c	33c

DEAD FRONT CUTOUTS



Porcelain cutouts with label name-plate holders and test holes. Covers can not be reversed, keeping holder on same circuit at all times.

No.	Type	Each	10, Ea.
F175	3 to 2 wire, double branch	70c	65c
F176	Double pole, single branch	64c	60c
F177	Double pole, single branch	35c	32c

CARTRIDGE FUSE CUTOUTS



250 Volts. High grade glazed porcelain bases. Spring action fuse clips.

No.	Type	Each	5, Ea.
F185	30 amp. single pole, main line	27c	23 1/2 c
F186	30 amp. 2 pole, main line	37c	32 1/2 c
F187	30 amp. 3 pole, main line	54c	47c
F188	60 amp. single pole, main line	44c	38 1/2 c
F189	60 amp. 2 pole, main line	82 1/2 c	70 3/4 c
F190	60 amp. 3 pole, main line	1.18	1.01
F191	30 amp. 2 pole, single branch	40c	38c
F191	30 amp. 2 pole, double branch	76 1/2 c	65 1/2 c
F192	30 amp. 3 to 2 pole, double branch	84c	81c
F193	30 amp. 3 pole, single branch	79 1/2 c	68 1/4 c
F194	30 amp. 3 pole, double branch	1.32 1/2	1.13 1/2
F195	60 amp. 2 pole, single branch	1.08	88 1/2 c
F196	60 amp. 2 pole, double branch	2.06	1.77
F197	60 amp. 3 to 2 pole, double branch	2.47	2.12
F198	60 amp. 3 pole, single branch	1.77	1.52
F199	60 amp. 3 pole, double branch	3.53	3.03

LAMP GUARDS



Gripon



Loxon



Open

FOR 60 WATT LAMPS

No.	Type Socket	Each	Doz.
I 251	Brass shell	18c	1.98
I 252	Weatherproof	18c	1.98
LOXON			
No.	Type Socket	Each	Doz.
I 253	Brass shell	20c	2.20
I 254	Weatherproof	20c	2.20
I 257	Key	5c	40c
OPEN			
No.	Type Socket	Each	Doz.
I 255	Brass shell	18c	1.98
I 256	Weatherproof	18c	1.98

RUBBER HANDLE SOCKET

Has turn knob switch. Heavy duty. Used on extension sets. 250 watts, 250 volts.

No.	Each	10, Ea.	20, Ea.
A257	33c	29c	24 1/2 c



PORCELAIN BASE BATTERY SWITCHES






No.	Type	Each	10, Ea.
I 258	S. P. S. T.	7 1/2 c	6 3/4 c
I 259	S. P. D. T.	10c	9c
I 260	D. P. S. T.	16 1/2 c	14 1/2 c
I 261	D. P. D. T.	18 1/2 c	17c


STANDARD UNILETS and COVERS



DISCOUNT ON UNILETS AND COVERS




Less than \$15.00 List10%
 \$15.00 to \$50.00 List15%
 \$50.00 List and Over23%
 5% Cash Discount on Above.



TYPE A				TYPE LR			
No.	Size	List, Each		No.	Size	List, Each	
 U300	1/2 in.	23c		U344	1/2 in.	32c	
U301	3/4 in.	28c		U345	3/4 in.	36c	
U302	1 in.	40c		U346	1 in.	52c	
U303	1 1/4 in.	80c		U347	1 1/4 in.	1.05	
U304	1 1/2 in.	1.04		U348	1 1/2 in.	1.40	
U305	2 in.	2.14		U349	2 in.	2.40	
				U350	2 1/2 in.	5.00	
				U351	3 in.	6.50	

TYPE E				TYPE LL			
No.	Size	List, Each		No.	Size	List, Each	
U320	1/2 in.	23c		U336	1/2 in.	32c	
U321	3/4 in.	28c		U337	3/4 in.	36c	
U322	1 in.	40c		U338	1 in.	52c	
U323	1 1/4 in.	80c		U339	1 1/4 in.	1.05	
U324	1 1/2 in.	1.04		U340	1 1/2 in.	1.40	
U325	2 in.	2.14		U341	2 in.	2.40	
U326	2 1/2 in.	4.20		U342	2 1/2 in.	5.00	
U327	3 in.	5.00		U343	3 in.	6.50	

TYPE B				TYPE FS			
No.	Size	List, Each		No.	Size	List, Each	
 U306	1/2 in.	23c		U360	1/2 in.	52c	
U307	3/4 in.	28c		U361	3/4 in.	60c	
U308	1 in.	40c		U362	1 in.	68c	
U309	1 1/4 in.	80c					
U310	1 1/2 in.	1.04					
U311	2 in.	2.14					

TYPE C				TYPE FSC			
No.	Size	List, Each		No.	Size	List, Each	
U312	1/2 in.	32c		U363	1/2 in.	60c	
U313	3/4 in.	36c		U364	3/4 in.	72c	
U314	1 in.	52c		U365	1 in.	88c	
U315	1 1/4 in.	1.05					
U316	1 1/2 in.	1.40					
U317	2 in.	2.40					
U318	2 1/2 in.	5.00					
U319	3 in.	6.50					

TYPE LB				UNILET RECEPTACLES			
No.	Size	List, Each					
 U328	1/2 in.	32c		 U366		 U368	
U329	3/4 in.	36c		U366	1/2 in. for Lamp	35c	
U330	1 in.	52c		U367	3/4 in. for Lamp	40c	
U331	1 1/4 in.	1.05		U368	1/2 in. Duplex	40c	
U332	1 1/2 in.	1.40		U369	3/4 in. Duplex	50c	
U333	2 in.	2.40					
U334	2 1/2 in.	5.00					
U335	3 in.	6.50					

TYPE T				UNILET GASKETS			
No.	Size	List, Each					
U352	1/2 in.	38c			Solid gaskets for use between unilet and metal cover. If open gaskets are desired, in ordering specify open after catalog number.		
U353	3/4 in.	46c		U370	1/2 in.	10c	
U354	1 in.	64c		U371	3/4 in.	10c	
U355	1 1/4 in.	1.22		U372	1 in.	15c	
U356	1 1/2 in.	1.69		U373	1 1/4-1 1/2 in.	20c	
U357	2 in.	2.55		U374	2 in.	25c	
U358	2 1/2 in.	5.00		U375	2 1/2-3 in.	40c	
U359	3 in.	7.50					


UNILET COVERS — PORCELAIN — METAL

See Discount Schedule Above.

1/2-inch				3/4-inch				1-inch				1 1/4-1/2-inch				2-inch				2 1/2-3-inch			
No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each	No.	Each
1 Hole, Porc.U376	10c	U382	15c	U388	25c	U394	36c	U401	60c	U407	80c												
2 Hole, Porc.U377	10c	U383	15c	U389	25c	U395	36c	U403	60c	U409	80c												
3 Hole, Porc.U378	10c	U384	15c	U390	25c	U396	36c	U405	60c	U411	80c												
4 Hole, Porc.U379	10c	U385	15c	U391	25c	U397	36c	U416	42c	U417	56c												
5 Hole, Porc.		U386	15c	U392	25c	U398	36c																
6 Hole, Porc.		U387	15c	U393	25c	U399	36c																
Blank MetalU412	6c	U413	8c	U414	17c	U415	24c																

COMBINATION and SURFACE TYPE SWITCHES

DUPLEX SWITCHES and RECEPTACLES

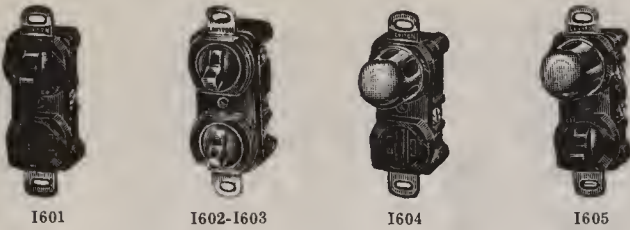

These units can be installed in a single gang switch box using a duplex receptacle plate. Maximum convenience in small space.

SINGLE POLE SWITCH AND RECEPTACLE

Receptacle and switch operates independently. Switch 10 Amp.-125 V. Receptacle 10 Amp.-250 V.

No.	Each	10, Ea.
I601.....	27c	23c

DUPLEX TOGGLE SWITCHES

Two separate circuit single pole toggle switches. 5 Amp.-250 V., 10 Amp.-125 V.

No.	Each	10, Ea.
I602.....	32c	28c

1-S. P. AND 1-3 WAY SWITCH

Two separate circuit switches. S. P. switch 10 Amp.-125 V., 5 Amp.-250 V. 3-way switch, 6 Amp.-125 V., 3 Amp.-250 V.

No.	Each	10, Ea.
I603.....	40c	36c

RECEPTACLE AND PILOT LIGHT

Single 15 Amp. circuit. Bulb included. Bulb replaceable from front.

No.	Each	10, Ea.
I604.....	38c	34c

SINGLE POLE SWITCH AND PILOT LIGHT

10 Amp.-125 Volt. Single circuit device, bulb included.

No.	Each	10, Ea.
I605.....	41c	37c

Arrow Bakelite Cover Switches


Switches completely inclosed and fastened to sturdy bakelite cover. 10 Amp.-125 V., 5 Amp.-250 V.

No.	Box	Type	Each	10, Ea.	100
A1001	3 1/4"	S. P.	33 1/2c	29 1/2c	25.42
A1002	3 1/4"	3-Way	39c	34 1/2c	29.76
A1003	4"	S. P.	35c	31c	26.66
A1004	4"	3-Way	41c	36c	31.00

Arrow Metal Cover Switches

Dependable switch mounted on galvanized cover 6 Amp.-125 V., 3 Amp.-250 V.

No.	Box	Type	Each	10, Ea.	100
A1005	3 1/4"	S. P.	16 1/2c	14c	12.40
A1006	3 1/4"	3-Way	29 1/2c	26c	22.32
A1007	4"	S. P.	17c	15c	13.05
A1008	4"	3-Way	31c	27c	23.56



A911

Arrow Line Starting Switches



A912

For use on 3/4 to 2 H. P. motors of low starting current line starting type. Quick make—quick break. Has given unequalled service for many years. Supplied in cadmium plated box. 250 V.

No.	Mfg. No.	Amps.	Pls.	Each	Each
A911	6808	30	2	1.49	1.35
A912	7808	30-20	3	3.74	3.40

ARROW SURFACE SNAP SWITCHES

Nickel finish, metal covers,

No.	Type	Each	10, Ea.	100
A1009	5 Amp., S. P.	31 1/2c	27 1/2c	23.87
A1010	5 Amp. In. S.P.	37c	32 1/2c	27.90
A1011	3 Amp. 3-Way	59 1/2c	52c	44.95
A1012	5 Amp. 4-Way	1.94	2.21	167.00



ARROW PONY TYPE SWITCHES



With nickel covers. Single pole 6 Amp.,-125 V. Three way 5 Amp.-125 V.

No.	Type	Each	10, Ea.	100
A1013	Sgl. Pole	31 1/2c	27 1/2c	23.87
A1014	3-Way	59 1/2c	52c	44.95

ARROW 10 AMP. SWITCHES

Surface tumbler type. S.P., 3 Way, 10 Amp.-125 V. Double pole, 10 Amp.-250 V.

No.	Type	Each	10, Ea.	100
A1015	S. P.	73 1/2c	64 1/2c	55.49
A1016	3-Way	1.10	92c	79.05
A1017	D. P	1.10	92c	79.05



Arrow Bakelite

Surface Tumbler Switches

Black Bakelite cover and base, 6 Amp.-125 V. 3 Amp.-250 V.

No.	Type	Each	10, Ea.	100
A1018	Sgl. Pole	15c	13c	11.16
A1019	3-Way	27 1/2c	24 1/2c	21.00



Arrow Ceiling Pull Switches

Base diameter 2 1/2 in. 10 Amp.-125 V.

No.	Type	Each	2, Ea.	10, Ea.
A1020	S.P.	1.39	1.22	1.05
A1021	D.P.	1.22	1.41	1.61
A1022	S.P.	1.39	1.22	1.05
A1023	S.P.	1.22	1.41	1.61



A1020



A1022

Arrow Weather Proof

Flush Switches

Fits in standard switch box. Well suited for outdoor uses or in any moist location. Finished in cadmium plate. Complete with gasket.


No.	Type	Each	2, Ea.	10, Ea.
A1024	Single Pole	1.42	1.25	1.08
A1025	3-Way	1.61	1.41	1.22



Arrow

Door Switches and Boxes

6 Amp.-125 V., 3 Amp.-250 V. Switch is mounted in a steel box, porcelain lined. Striker plate furnished with each switch. Box is steel finished in enamel.



SWITCHES

No.	Light On	Each	5, Ea.	25, Ea.
A1026	Door Open	2.78	2.45	2.10
A1027	Door Closed	2.78	2.45	2.10

BOX

No.	Each	5, Ea.	25, Ea.
A1028	50c	43 1/2c	37 1/2c

RANGE and POLARIZED RECEPTACLES



ARROW RANGE OUTLET

Polarized, 3 wire, 50 Amp. Designed for straight in wiring and equipped with solderless connections. Has built-in cable clamp. K/Os for 1 in. or $\frac{3}{4}$ in.

No.	Each	2, Ea.	10, Ea.
A730	1.58	1.29	1.19

FLUSH RANGE OUTLET

3 wire, 50 Amp. 250 Volts. Will fit 4" or 4 $\frac{1}{4}$ " box with 2-gang switch cover. Straight in wiring and solderless connectors. .040" brass plate included in cost.

No.	Each	2, Ea.	10, Ea.
A731	2.70	2.37	2.04




ARROW RANGE CAP

90° cap designed for outlets listed above. 50 Amp. 250 Volt. Has built-in cable clamp and solderless contacts. Made of bakelite.

No.	Each	2, Ea.	10, Ea.
A732	1.87	1.64	1.41

RANGE CORD SETS



Has moulded bakelite cap and rubber cord with 2 No. 6 and 1 No. 8 stranded conductors. Overall length is 36 inches. Fits standard range receptacles.

No.	Each	2, Ea.	10, Ea.
A733	1.96	1.73	1.49

2 WIRE, 10 AMP. POLARIZED DEVICES



10 Amps. 250 Volts, 15 Amps. 125 Volts.


RECEPTACLE

No.	Each	10, Ea.	30, Ea.
A743	48c	42c	36c

CAPS

No.	Type	Each	10, Ea.
A744	Standard	35c	30c
A745	Cord Grip	52 $\frac{1}{2}$ c	46c

2 WIRE, 20 AMP. POLARIZED DEVICES



20 Amps. 250 Volts.

RECEPTACLES

No.	Type	Each	10, Ea.	30, Ea.
A746	Single	87c	76c	66c
A747	Duplex	1.30	1.14	98 $\frac{1}{2}$ c

CAPS

No.	Type	Each	10, Ea.	30, Ea.
A748	Standard	42c	37c	32c
A749	Cord Grip	62 $\frac{1}{2}$ c	55c	47 $\frac{1}{2}$ c

3 WIRE, 10 AMP. POLARIZED DEVICES



15 Amp. 125 Volts, 10 Amp. 250 Volts. Flush receptacle takes standard single receptacle plate.

RECEPTACLE

No.	Type	Each	10, Ea.	30, Ea.
A750	Single	94c	83c	71c

CAPS

No.	Type	Each	10, Ea.	30, Ea.
A751	Standard	28c	24 $\frac{1}{2}$ c	21c
A752	Cord Grip	44c	39c	33 $\frac{1}{2}$ c

3 WIRE, 20 AMP. POLARIZED DEVICES



20 Amp. 250 Volts.

RECEPTACLE

No.	Type	Each	10, Ea.	30, Ea.
A753	Single	1.04	91 $\frac{1}{2}$ c	78 $\frac{1}{2}$ c

CAPS

No.	Type	Each	10, Ea.	30, Ea.
A755	Standard	52c	48c	40c
A756	Cord Grip	80c	70 $\frac{1}{2}$ c	61c

CORD CONNECTOR BODIES



No.	Amp.	Each	10, Ea.	30, Ea.
A757	10	33c	29c	25c
A758	20	58 $\frac{1}{2}$ c	51 $\frac{1}{2}$ c	44c
No.	Amp.	Each	10, Ea.	30, Ea.
A759	10	47c	41 $\frac{1}{2}$ c	35c
A760	20	82c	72c	62c
No.	Amp.	Each	10, Ea.	30, Ea.
A761	10	58 $\frac{1}{2}$ c	51 $\frac{1}{2}$ c	44c
A762	20	1.04	92c	79c
No.	Amp.	Each	10, Ea.	30, Ea.
A763	10	76c	67c	57c
A764	20	1.28	1.12	97c

Twist Lock Receptacle and Cap



Two wires, 10 Amp. 250 Volts. A twist of the cap after it is inserted into the receptacle makes it impossible to remove cap. Twisting back loosens cap.

RECEPTACLE

No.	Type	Each	10, Ea.	30, Ea.
A765	Single	33c	29c	25c

CAP

No.	Type	Each	10, Ea.	30, Ea.
A766	Cord Grip	41c	36c	31c

RECEPTACLES and PILOT LIGHTS

Arrow Receptacles



Has solid bakelite back. Four large binding screws will take up to No. 10 wire. Has "T" slots and blade finding ridges. 10 amp., 250 volts—15 amps., 125 volts.

DUPLEX RECEPTACLE				
No.	Color	Each	10, Ea.	100
A700	Brown	26½c	24c	19.84
A701	Ivory	32c	28c	24.18

SINGLE RECEPTACLE

No.	Color	Each	10, Ea.	100
A702	Brown	20c	17½c	15.19
A703	Ivory	24½c	21½c	18.60



Mohican Receptacles



A strong competitive receptacle. Has 4 binding screws for convenience of hookup. Parallel slots are set in groove to permit easy insertion of cap. 10 amps., 250 volts—15 amps., 125 volts.

DUPLEX RECEPTACLE				
No.	Color	Each	10, Ea.	100
A715	Brown	8½c	7½c	6.51
A716	Ivory	13½c	11½c	10.23

SINGLE RECEPTACLE

No.	Color	Each	10, Ea.	100
A717	Brown	7c	6c	5.27
A718	Ivory	12c	10½c	8.99



Twist-Tite Arrow Receptacle



Duplex. Takes two standard parallel blade caps. After inserting caps, a slight twist holds caps from pulling out. 10 amps., 250 volts—15 amps., 125 volts.

No.	Color	Each	10, Ea.	100
A704	Brown	26½c	24c	19.84
A705	Ivory	32c	28c	24.18

Toggle Type Receptacle



A convenience outlet that will fit a standard toggle plate. Has straight ears for plate. Parallel slots. Side wired. 15 amps., 125 volts—10 amps., 250 volts.

No.	Color	Each	10, Ea.	50, Per
A719	Brown	20c	17½c	15.19
A720	Ivory	25c	21½c	18.60

Arrow Radio Receptacle

For aerial and ground connections. Has plug fingers and slots set at an angle so that it is impossible to reverse aerial and ground. Complete with cap.

No.	Color	Each	10, Ea.	100
A706	Brown	46c	40c	34.72
A707	Ivory	55c	48c	41.54



Combination Radio Receptacle

For aerial, ground, and power connection. Made of bakelite. Aerial blades set at an angle so that ground or power caps cannot be confused. Power outlet standard.


No.	Color	Each	2, Ea.	10, Ea.
A721	Brown	90c	79c	68c
A722	Ivory	1.00	88c	76c



Arrow Flush Receptacles



With outlet box covers.
15 amp. 125 v. — 10 amp. 250 v.



No.	Type	Each	10, Ea.	50, Per
A708	Single	3¼ in. 10c	9c	100
A709	Duplex	3¼ in. 11½c	10c	7.75
A710	Single	4 in. 12c	11c	8.68
A711	Duplex	4 in. 13c	11½c	9.30

Surface Type Receptacle



Duplex. Two-piece bakelite receptacle that will withstand hard service. Has parallel slots which have grooves for easy placement of the cap. 15 amps., 125 volts—10 amps., 250 volts.

No.	Color	Each	10, Ea.	50, Per
A723	Brown	17½c	15½c	100
A724	Ivory	29c	26c	13.33

Arrow Pilot Light

Moulded of bakelite and supplied with plaster ears. Candelabra base lamp included. Will fit into any standard switch box. Receptacles will be supplied with 220-volt lamps on special order.

No.	Each	10, Ea.	30, Ea.
A725	87c	76c	66c



Arrow Fan Hanger Outlet



Provides electrical connection and mechanical support for fan. It is easily installed and fits a standard 4-inch square box. 10 amp., 250 volts.

No.	Each	10, Ea.	20, Ea.
A712	2.13	1.87	1.61


Mohican Clock Hanger

Provides mechanical support and electrical connection for clocks. Furnished complete with .040-inch plate for standard switch box. 10 amp., 250 volts.

No.	Each	10, Ea.	30, Ea.
A713	57c	50c	43½c



Edison Base Receptacles and Bullseyes



No.	Type	Each	10, Ea.	50, Ea.
A726	Receptacle	21c	18c	16c
A727	Round Bullseye	29c	26c	22c
A728	Toggle Bullseye	29c	26c	22c

Mohican Outdoor Receptacle




WEATHERPROOF

Complete with cap to close opening when not in use. Plate, rubber mat and receptacle included. For standard switch box. 10 amps., 250 volts—15 amps., 125 volts.

No.	Each	10, Ea.	30, Ea.
A714	98c	86c	74c

"All Round" Outlet



A neat, compact convenience outlet for use in wood floors, walls, mantles, store windows, and anywhere where outlet is free from injury or moisture. All that is necessary is a 1½-inch hole. 15 amps., 125 volts—10 amps., 250 volts.

No.	Each	10, Ea.	50, Ea.
A729	55½c	49c	42c

APPROVED FLUSH SWITCHES



ARROW BAKELITE SWITCHES

Well built inclosed bakelite switch designed for high efficiency. Large binding screws will take up to No. 10 wire. Reinforced mounting straps. Size, 1 in. deep, 1½ in. long and ¾ in. wide. 10 amp., 125 volts.

No.	Type	Each	10, Ea.	100
A1107	S. P., brown	18c	15½c	13.64
A1108	3-way, brown	24½c	21½c	18.60
A1109	S. P., ivory	23c	20c	17.36
A1110	3-way, ivory	29½c	26c	22.32



ARROW MOHICAN TOGGLE SWITCHES

A porcelain base line made by Arrow to meet competitive prices. Durable construction. 10 amp., 125 volts.

SINGLE POLE				
No.	Color	Each	10, Ea.	100
A1138	Brown	10c	.9c	7.75
A1139	Ivory	13c	11c	9.61
3-WAY				
No.	Color	Each	10, Ea.	100
A1140	Brown	16c	13½c	11.78
A1141	Ivory	18c	15½c	13.64

ARROW PORCELAIN BASE SWITCHES

"T" rated, tumbler type, bakelite handles. 10 amp., 125 volts.

No.	Type	Each	10, Ea.	100
A1111	S. P., brown	28½c	25c	21.70
A1112	S. P., ivory	37c	32½c	27.90
A1113	D. P., brown	73½c	64½c	55.49
A1114	D. P., ivory	81½c	71½c	61.69
A1115	3-way, brown	47c	41½c	35.65
A1116	3-way, ivory	55c	48½c	41.85
A1117	4-way, brown	2.43	1.84	



SPECIAL TOGGLE SWITCH

Porcelain base toggle switch rated 10 amp., 125 volts. Will give 100% service. Underwriters' Laboratory approved. Has bakelite handle and porcelain base. Quick action mechanism. Single pole type.

No.	Each	10, Ea.	100
11142	6½c	6c	5.85



ARROW TIME SAVER SWITCHES

Bakelite base and fully inclosed. Smallness of base makes these switches time savers from an installation standpoint. Takes standard toggle plate. "T" rated. 10 amp., 125 volts. Brown.

No.	Type	Each	10, Ea.	50, Per
A1118	Single pole	28½c	25c	100
A1119	Double pole	73½c	64½c	55.49
A1120	3-way	47c	41½c	35.65
No.	Type	Each	2, Ea.	5, Ea.
A1121	4-way	2.43	2.14	1.84



SPECIAL PUSH SWITCH

Sturdy porcelain base push switch with strong, quick action contacts. Has reinforced bracket for mounting. Rated at 10 amp., 125 volts. Fully guaranteed.

No.	Each	10, Ea.	100
11143	9c	8c	6.60

ARROW APPROVED PUSH SWITCH

Has 1-inch porcelain base and composition handles. Designed for long service. 10 amp., 125 volts.

No.	Type	Each	10, Ea.	100
A1144	Single pole	33½c	29½c	25.42
A1145	Double pole	96c	84c	72.54
A1146	3-way	49c	43c	36.89
No.	Type	Each	2, Ea.	10, Ea.
A1147	4-way	2.71	2.38	2.05



ARROW MERCURY SWITCHES

Silent operation. "T" rated at 10 amps., 125 volts. Durable and dependable. Fits standard box and plate.

No.	Type	Each	10, Ea.	50, Per
A1122	S. P., brown	70c	61c	52.70
A1123	3-way, brown	87c	76c	65.72
A1124	S. P., ivory	78c	68½c	58.90
A1125	3-way, ivory	95c	83½c	71.92



ARROW TYPE "C" TUMBLER SWITCHES

Rated at 10 amps., 125 volts. Has 1½-inch bakelite base. Fully inclosed.

No.	Type	Each	10, Ea.	50, Per
A1126	Single pole	70c	61c	52.70
A1127	3-way	87c	76½c	65.72
No.	Type	Each	2, Ea.	10, Ea.
A1128	Double pole	1.13	.99½c	.85½c
A1129	4-way	2.78	2.45	2.10



ARROW 20 AMP. TYPE "C" SWITCHES

Bakelite base measures 2 inches. Switch mechanism. Fully inclosed. Heavy duty.

No.	Type	Each	2, Ea.	10, Ea.
A1130	Single pole	1.13	.99c	.85c
A1131	3-way	1.30	1.14	.98c
A1132	Double pole	1.48	1.30	1.12
A1133	4-way	3.91	3.43	2.96



ARROW 30 AMP. TYPE "C" SWITCHES

Two-inch bakelite base. Takes standard switch plate. Fully inclosed.

No.	Type	Each	2, Ea.	10, Ea.
A1134	Single pole	1.39	1.22	1.05
A1135	3-way	1.74	1.53	1.31
A1136	Double pole	2.00	1.76	1.51
A1137	4-way	5.22	4.58	3.94



ARROW PUSH LOCK SWITCHES

Has 1-inch porcelain base. 10 amp., 125 volt rating. One key included with each switch.

No.	Type	Each	10, Ea.	50, Ea.
A1148	Single pole	95c	83c	72c
A1149	Double pole	1.57	1.38	1.19
A1150	3-way	1.10	.97c	.83c
No.	Type	Each	2, Ea.	10, Ea.
A1151	4-way	3.33	2.92	2.52

LOCK TYPE TOGGLE SWITCH

10 amp., 125-volt "T" rated. One-inch porcelain base with reinforced bracket for mounting.

No.	Type	Each	10, Ea.	50, Ea.
A1152	Single pole	90c	79c	68c
A1153	3-way	1.08	.95c	.82c
No.	Type	Each	2, Ea.	10, Ea.
A1154	Double pole	1.05	1.28	1.02
A1155	4-way	3.05	2.68	2.30



Arrow Round Metal Handle Toggle Switch

Porcelain base type. Strong, quick action mechanism. Fits standard switch box.

No.	Type	Each	10, Ea.	20, Ea.
A1156	Single pole	33c	29c	25c
A1157	Double pole	77c	68c	58½c
A1158	3-way	51½c	45c	39c

ARROW MOMENTARY CONTACT SWITCH

One circuit, one push button. Take one button open plates.

No.	Type	Each	2, Ea.	10, Ea.
A1159	S. P. normally open	1.24	1.09	.93½c
A1160	S. P. normally closed	1.24	1.09	.93½c
A1161	3-way	1.39	1.22	1.05



BRASS and PORCELAIN SOCKETS and BODIES

ARROW BRASS SHELL SOCKETS



No.	Cap	PULL CHAIN	Ea.	25, Ea.	100
A1500	1/8 in.	15c	13c	11.16	
A1501	Pendant	15c	13c	11.16	
		KEY			
A1502	1/8 in.	11 1/2 c	10 1/2 c	8.99	
A1503	Pendant	11 1/2 c	10 1/2 c	8.99	
		KEYLESS			
A1504	1/8 in.	10c	9c	7.75	
		TURN KNOB			
A1505	1/8 in.	11 1/2 c	10 1/2 c	8.99	
		PUSH THRU			
A1506	1/8 in.	13c	11 1/2 c	10.11	

ARROW ELECTROLIER SOCKETS



No.	Cap	PULL CHAIN	Ea.	25, Ea.	100
A1507	1/8 in.	15 1/2 c	13 1/2 c	11.78	
		KEYLESS			
A1508	1/8 in.	9 1/2 c	8c	7.13	
		KEY			
A1509	1/8 in.	12c	10 1/2 c	8.99	
		PUSH THRU			
A1510	1/8 in.	12 1/2 c	11c	9.48	

ARROW MOGUL SOCKET For 2-Filament Lamp



Has removable one-inch hickey tapped 1/4-inch. Turn knob switch handle is removable. Operates high, medium, low, off. 750 watts, 250 volts.

No.	Each	10, Ea.	100
A1511	36c	31 1/2 c	27.28

Arrow Pull Chain Switch Body

Bottom pull type. 3 Amp., 125 V; 1 Amp. 250 V. Brush brass finish.

No.	Each	10, Ea.	20, Ea.
A1029	69c	61c	52 1/2 c



ARROW STANDARD B. B. CAPS



No.	Type	Ea.	25, Ea.	100
A1512	1/8 in.	6 1/2 c	5 1/2 c	4.96
A1513	9/16 in.	9 1/2 c	8 1/2 c	7.44
A1514	1/4 in. Angle	28 1/2 c	25c	21.70
A1515	1/2 in. Male	12c	10 1/2 c	9.30
A1516	1/2 in.	24 1/2 c	21 1/2 c	18.60

Bakelite Sockets with Screw Type Cap

Bakelite shells have shade holder threads. Popular price.

No.	Type	Ea.	25, Ea.	100
I1517	Pull Chain	18 1/2 c	17 1/2 c	15.60
I1518	Key	15 1/2 c	14 1/2 c	13.20
I1519	Push Thru	16 1/2 c	15 1/2 c	14.20




ARROW SNAP-CAP PORCELAIN SOCKETS



Cap and body snap together easily and securely. Designed for easy and quick wiring.

No.	Type	Each	10, Ea.	100
A1520	Key, Pend. Cap	19 1/2 c	17c	14.88
A1521	Key, 1/8 in. Cap.	24 1/2 c	21 1/2 c	18.60
A1522	Keyless, Pend. Cap.	18 1/2 c	16 1/2 c	14.26
A1523	Keyless, 1/8 in. Cap	29 1/2 c	26c	22.32
A1524	Pull, Pend. Cap.	26c	23c	19.84
A1525	Pull 1/8 in. Cap.	31c	27c	23.56

ARROW PORCELAIN SOCKET BODIES

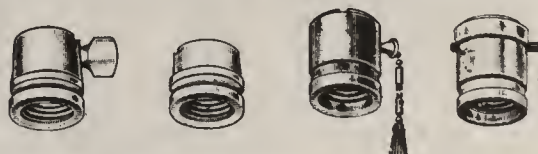

No.	Type	Each	10, Ea.	100
A1526	Key	26c	22 1/2 c	19.53
A1527	Keyless	23c	20c	17.36
A1528	Pull Chain	58c	51c	44.02
A1529	Push Thru	35 1/2 c	31c	26.97

ARROW PORCELAIN SOCKET CAPS



No.	Type	Each	10, Ea.	100
A1530	Pendant	10c	8 1/2 c	7.44
A1531	Cord Grip	24 1/2 c	21 1/2 c	18.60
A1532	1/8 inch	19 1/2 c	17c	14.88
A1533	1/4 inch	37c	32 1/2 c	27.90
A1534	3/8 inch	23 1/2 c	21c	17.98
A1535	1/2 inch	33c	29c	25.11
A1536	3/8 in. Angle	74c	65c	56.11
A1537	1/2 in. Angle	78c	69c	59.21

HEAVY DUTY SOFT RUBBER SOCKETS



Pendant caps will not pull off. Will not break when dropped.



No.	Type	Each	10, Ea.	100
I1538	Key	18 1/2 c	16c	15.50
I1539	Keyless	17c	15 1/2 c	14.26
I1540	Pull Chain	21c	19c	17.36
I1541	Push Thru	21c	19c	17.36

PORCELAIN FIXTURE SOCKET METAL SCREW CAP—EDISON BASE

No.	Cap.	Each	10, Ea.	100
I1542	1/8 in.	11c	10 1/2 c	9.00
I1543	1/4 in.	11c	10 1/2 c	9.00
I1544	3/8 in.	12 1/2 c	11 1/2 c	10.25



ARROW ADJUSTABLE ANGLE SOCKET

Adjustable 180° vertical, 340° horizontal. Firmly held in set position, will not vibrate from adjustment. Inexpensive holder for reflector bulbs. Made of black bakelite with nickel metal parts.

No.	Each	10, Ea.	100
A1545	41c	36c	31.00



FLUORESCENT SOCKETS, STARTERS, BALLASTS

ARROW FLUORESCENT DEVICES



The Starter Switch and Condenser are mounted in a small aluminum container fitted with contacts. This development makes the essential starting switch and condenser of a fluorescent lamp auxiliary easily replaceable.

The Starter Unit, FS-2, FS-4 fits into the Combination Starter Socket and lampholder. When mounted, the Starter projects through the reflector or channel surface immediately below the lamp.

The Starter Unit is easily inserted and locked in contact by a short turn in a clockwise direction. If replacements are necessary, reversing the process removes the Starter.

Reactors required are listed on opposite side of page.

STARTERS


No.	Type	Each	10, Ea.	50, Ea.
FS2	For 15 or 20 watt	45c	39½c	34c
FS4	For 30 or 40 watt	45c	39½c	34c

COMBINATION STARTER SOCKET AND LAMP HOLDER

No.	Color	Each	10, Ea.	100
A1700	Black	37c	33c	28.52
A1701	White	40c	35c	30.38
A1702	Black	37c	33c	28.52
A1703	White	40c	35c	30.38

Write for your copy of our new catalog on fluorescent raceway, trough and reflectors.

ARROW STARTER SOCKETS



No.	Type	Each	10, Ea.	100
A1712	For A1704, A1707	16c	14c	12.40
A1713	Flush or surface	16c	14c	12.40

ARROW FLUORESCENT LAMPHOLDERS



660 Watts, 250 Volts.

BLACK COLOR

No.	Type	Each	10, Ea.	100
A1704	Flush or surface	21c	18c	16.12
A1705	Flush	21c	18c	16.12
A1706	Showcase	21c	18c	16.12
A1707	Flush or surface	21c	18c	16.12

WHITE COLOR

No.	Type	Each	10, Ea.	100
A1708	Flush or surface	23c	21c	17.98
A1709	Flush	23c	21c	17.98
A1710	Showcase	23c	21c	17.98
A1711	Flush or surface	23c	21c	17.98

LEVITON FLUORESCENT SOCKETS




Made of bakelite. Wiring protected by a fibre disc in base. Takes up to No. 14 solid wire. 660 Watts, 250 Volts.

No.	Each	10, Ea.	100
I1714	19½c	17¼c	14.88
I1715	22c	20½c	16.74

JEFFERSON FLUORESCENT AUXILIARIES

For One Lamp



One unit necessary for each lamp. Special attention has been directed to compactness, sturdiness and ease of installation. These units are for use on 60 cycle current only. These auxiliaries incorporate the advantages of electrical and mechanical knowledge gained by years of research. Equipped with leads for easy wiring.

No.	Circuit Voltage	Lamp Watts	List	Each	10 Asstd. Each
A1716	110-125	15	1.40	1.22	1.09
A1717	110-125	20	1.40	1.22	1.09
A1718	220-250	30	1.90	1.66	1.48
A1719	110-125	30	3.00	2.62	2.34
A1720	220-250	40	2.35	2.06	1.66
A1721	110-125	40	3.50	3.06	2.73

JEFFERSON FLUORESCENT BALLASTS

FOR ONE LAMP




Same as auxiliaries, except there is no starter switch built in. Must

be used in connection with starter switches listed at left. Has wire leads for easy wiring. Faster action. 60 Cycle.

No.	Circuit Voltage	Lamp Watts	List	Each	10 Asstd. Each
A1722	110-125	15	65c	57c	51c
A1723	110-125	20	65c	57c	51c
A1724	220-250	30	1.25	1.09	97½c
A1725	110-125	30	2.25	1.97	1.75
A1726	220-250	40	1.50	1.31	1.17
A1727	110-125	40	2.50	2.19	1.95

JEFFERSON FLUORESCENT AUXILIARIES

FOR TWO LAMPS




The same construction as the one lamp auxiliaries except that one unit will light two fluorescent lamps. Underwriters' approved. Guaranteed for one year. 60 cycle.

No.	Circuit Voltage	Lamp Watts	List	Each	10, Asstd. Each
A1728	110-125	2-15	4.75	4.15	3.71
A1729	110-125	2-20	4.75	4.15	3.71

JEFFERSON FLUORESCENT BALLASTS

FOR TWO LAMPS




Same styling as the one lamp ballasts except that this unit will control 2 lamps. Must be used in conjunction with starter listed to the left. 60 cycles only.

No.	Circuit Voltage	Lamp Watts	List	Each	10, Asstd. Each
A1730	110-125	2-15	3.75	3.32	2.93
A1731	110-125	2-20	3.75	3.32	2.93
A1732	220-250	2-30	4.40	3.89	3.43
A1733	110-125	2-30	4.40	3.89	3.43
A1734	220-250	2-40	4.75	4.15	3.71
A1735	110-125	2-40	4.75	4.15	3.71

You may assort any style of ballasts or reactors to obtain best price.

PORCELAIN RECEPTACLES—OUTDOOR SOCKETS


Porcelain Pull Receptacle



Glazed porcelain for use on 3 1/4 inch or 4 inch outlet box. Has shadeholder groove. Complete with 4 foot pull cord.

No.	Size	Ea.	10, Ea.	50, Ea.
I 610	3 1/4 in.	16c	14c	12 1/2c
I 611	4 in.	21c	19c	18c

Porcelain Pull Receptacle



With convenience outlet.

Ideal where an extra outlet is needed. Fits 3 1/4 inch or 4 inch box. Complete with 4 foot pull cord.

No.	Size	Ea.	10, Ea.	50, Ea.
I 612	3 1/4 in.	25c	23c	20c
I 613	4 in.	33c	30c	26c

Keyless Porcelain Receptacle



Glazed porcelain. Has shade holder groove. Furnished with open type terminals.

No.	Size	Ea.	10, Ea.	100
I 614	3 1/4 in.	10 1/2c	9 1/2c	8.40
I 615	4 in.	13 1/2c	12c	10.75

Box Receptacles



Screw terminal type. Furnished on heavy cadmium plated metal cover. Socket has shade holder groove.

No.	Size	Ea.	10, Ea.	100
I 616	3 1/4 in.	9c	8c	7.00
I 617	4 in.	10c	9c	8.00


Box Receptacles

Rugged in build. Cover is cadmium plated. Socket has shade holder groove. Supplied with 6 inch wire leads.



No.	Size	Ea.	10, Ea.	100
I 618	3 1/4 in.	10 1/2c	10c	9.00
I 619	4 in.	12c	11c	9.75

Push Clips



Heat method for attaching wires to baseboards and moulding. Colored to match cord. 8 to card.

No.	Color	Card Cds., of 10	Asst'd Ea.
I 648	Ivory	6c	5c
I 649	Brown	6c	5c

Arrow Pull Sign Receptacle

250 watts — 250 volts



Porcelain Type for use in fixtures and holders. Furnished with short chain and 4 foot pull cord.

No.	Ea.	10, Ea.	100
A 620	16 1/2c	14 1/2c	12.40

INDEPENDENT PULL TYPE

Same style as above.

No.	Ea.	10, Ea.	100
I 621	11 1/2c	10 1/2c	9.15

ARROW PORCELAIN SIGN RECEPTACLES



A 625

A 626

A 627

SCREW TERMINAL TYPE

No.	Ea.	10, Ea.	100
A 625	7c	6 1/2c	5.50

CONCEALED TERMINAL TYPE

No.	Ea.	10, Ea.	100
A 626	12c	10 1/2c	9.30

WITH 6 INCH WIRE LEADS

No.	Ea.	10, Ea.	100
A 627	7c	6 1/2c	5.58



Arrow Cleot Receptacles

OPEN TERMINALS, EDISON BASE BAKELITE

No.	Ea.	10, Ea.	100
A 628	7c	6 1/2c	5.58

EDISON BASE, PORCELAIN

No.	Ea.	10, Ea.	100
A 629	7c	6 1/2c	5.58

INDEPENDENT MAKE, PORCELAIN EDISON BASE

No.	Ea.	10, Ea.	100
I 630	5 1/2c	5c	4.50

Miniature-Condellabro Cleot Receptacles



INDEPENDENT MAKE OPEN TERMINALS

No.	Base	Each	100
I 631	Min.	5c	4.00
I 632	Cand.	5c	4.00

Arrow Aluminum



KEYLESS SOCKETS SHADEHOLDER



Completely weatherproof. Cap has a permanently fastened porcelain lining with binding screws in the cap. Two piece style. 660 watts, 600 volts.

SOCKET

No.	Size	Ea.	10, Ea.	50, Ea.
A 633	Med. 1/2 in. Cap	58c	51c	44c

SHADE HOLDER

No.	Size	Ea.	10, Ea.	50, Ea.
A 634		26c	23c	19 1/2c

Pin Type Bokelite Weather-proof Socket




No wire striping. Screw down cap on the wires and contact is made. Can be easily disconnected and reused. Ideal for temporary or decorative lighting.

No.	Base	Ea.	10, Ea.	100
A 635	Edison	16c	14 1/2c	12.40
A 636	Intermediate	8c	7c	6.20
A 637	Candelabra	8c	7c	6.20

All Rubber Pigtail Socket

Will withstand all rough uses in any weather condition. Soft rubber shell. Shock proof. Leads sealed into shell.



No.	Ea.	10, Ea.	100
I 639	7 1/2c	7c	6.50

Arrow Bokelite Pigtail Socket



660 watts — 600 volts

Has 6 inch wire leads and shade holder groove. Handy for temporary hookup.

No.	Ea.	10, Ea.	100
A 638	11c	9 1/2c	8.37

Independent Socket Reducers

Sturdy porcelain construction.



MOGUL TO EDISON

No.	Ea.	10, Ea.	100
I 640	18c	15 1/2c	13.65

EDISON TO CANDELABRA

No.	Ea.	10, Ea.	100
I 641	6c	5c	4.29

EDISON TO INTERMEDIATE

No.	Ea.	10, Ea.	100
I 642	9c	8c	6.66

No.	Ea.	10, Ea.	100
I 643	5 1/2c	5c	4.02

Lamp Extension Sockets




660 watts — 250 volts with metal shell threaded for unoholder.

No.	Ea.	10, Ea.
I 644	9c	8c

Insulated Paper Shell Not threaded.

No.	Ea.	25, Ea.
I 645	5c	4 1/2c

Corded Nichrome Wire



Requires no further cutting—may be stretched to desired length.

For Toasters, Heaters, etc. — 600 w.

No.	Each	10, Ea.
I 646-2	9c	7 1/2c

For Hot Plates, etc. — 600 w.

No.	Each	10, Ea.
I 647-3	13c	10 1/2c

BELLS and SIGNALING DEVICES

Signal Single Coil Bell



A door bell finished in gray and designed for battery or transformer operation. Silver contacts.

No.	Size	Each	10, Ea.
S540	2½ inch	19c	18c

Signal Door Buzzer

Single coil type. Will operate on batteries or transformer. Finished in gray.

No.	Each	10, Ea.
S541	18c	17c



Large Signal Bells

Operates on regular transformer, 8-12 volts, or 2 or more dry cells. Long life.

No.	Size	Each
S542	3 in.	32c
S543	4 in.	44c
S544	5 in.	1.05
S545	6 in.	1.20
S546	8 in.	1.85

Signal Bell-Buzzer

Totally inclosed unit. Has exceptional eye appeal. Operates on 6-12 volt transformer or dry cells.

No.	Each	10, Ea.
S547	49c	45c



Tork Electric Time Switches



For turning anything electrical on and off regularly. Operates window lights, signs, fans, etc. Has accurate self-starting motor with easy to read dial. Constructed for long, accurate service. Cabinet can be locked.

MODEL 191

Single pole, 15 amps., for general use. Available with one or two on and off operations daily. 115 volt 60 cycle A.C.

No.	Each
S555	8.92

MODEL 962

Double pole — 20 amps. on each pole. Greater electrical capacity.

No.	Each
S556	10.50

Real Phones



Real Phones are junior sized telephones, not only for children's use but for light utility service as well. Modern, compact French style phones. Signal buzzers in base. Packed in box containing two phones, wire and instruction. Less batteries.

No.	Set	3, Set
S548	4.20	3.90


Flush-Calls

Replaces old-fashioned bells, buzzers and transformers.

POWACALL

Underwriters' approved. Replaces old style transformer. Fits any standard box or outlet box with cover, 2¾ inches deep. Usually placed in second gang of any combination, taking 110V. from same line as receptacle, switch, etc. Provides its own barrier. Type 666.

No.	List	Each
S549	1.12	84c



Fits standard switch box. Operates on 8 to 12 volts A.C. Replaces old style combination bell and buzzer with both calls far superior in tone and carrying power. Type 662.

No.	List	Each
S550	1.44	86c


Tucall



Toggelpush

An efficient push that fits any standard box and takes any standard plate. Fitted with standard switch which provides adequate protection to walls. Type 664.

No.	List	Each
S551	25c	15c



Ring Call

Replaces old-fashioned small bell with better tone and more carrying power. Type 660 for 8-12 volt A.C. 60 cycles. May be ganged together with 110 volt receptacles, etc. A standardized line.

No.	List	Each
S552	1.02	61c



Melocall

Costs no more than first class grade of quality bells or buzzers. Gives a soft, mellow, momentary "ding". An entirely different "third call" where such is necessary. Type 663.

No.	List	Each
S553	1.20	72c



Buzacall

Replaces old-fashioned buzzer with far better tone and greater carrying power. Requires no adjustments. Just the thing for either old or new jobs. For 8-12 volt A.C. Type 661.

No.	List	Each
S554	96c	58c



Serv-U-Phones



Private phone system for use in homes, small stores, or plants. Each phone is well constructed and has clear reception. Has concealed buzzer in base.

No.	1 Phone	6 Phones
S558	3.90	3.60

No.	1 Phone	6 Phones
S559	3.90	3.60

Jefferson Transformers



Wizzard

Tri-Volt

Nu-Code

Jefferson Transformers are manufactured of the highest quality materials and comply with the underwriters' requirements.

No.	Type	Volts	Each	10, Ea.
S557	Wizzard	10 volts	46c	40c
S558	Tri-Volt	6, 12, 18 volts	80c	70c
S559	Nu-Code	10 volts	65c	57c

Bakelite Push Buttons



Strong construction will not warp. Metal parts protected.

No.	Type	Each	10, Ea.
S560	Small Round	8½c	7½c
S561	Large Round	8½c	7½c
S562	Square	8½c	7½c
S563	Name Plate	14c	10c



Metal Push Buttons

Strong and compact. Satin Brass finish.

No.	Size	Each	10, Ea.
S564	1½ in.	7c	6½c
S565	2¼ in.	7c	6½c

Edwards' Pearl Push Button

Midget size. Simple and sturdy construction. For low voltage only. Fits ⅝-inch hole.

No.	Each	50, Ea.
S566	23c	19c



Edwards' Pear Push

Built with correct grip. Will stand rough service.

No.	Each	10, Ea.
S567	36c	30c



Edwards' Door Spring Alarm

Positive Contact.

Bell rings when door is open.

No.	Each	10, Ea.
S568	24c	21c

Bell rings when door is closed.

No.	Each	10, Ea.
S569	24c	21c



Edwards' Door Opener

Positive action. Edwards' door openers have for years been a standard of quality. Operates on low voltage.

No.	Each	3, Ea.
S570	1.80	1.50



No. 18 Bell Wire

High grade cotton wound on solid wire. Waxed.

No.	Package	Per Lb.
S571	¼ lb.	33c
S572	½ lb.	32c
S573	1 lb.	31c
S574	7 lb.	30c




CAPS, BODIES and SWITCHES

Arrow Cap and Body



Standard. Made of brown bakelite. 660 watts, 250 volts.

CAP			
No.	Each	50, per 100	100
A1075	2c	1.80	1.55
BODY			
No.	Each	50, per 100	100
A1076	3c	2.52	2.17



Levolver Switch

6 amps., 125 volts. Fits into canopies, ceiling pans or knockouts of ceiling boxes. Large washer for box use and small nut supplied. Standard finish Brush Brass.

No.	Each	10, Ea.
I 1084	50c	45c



Leviton Canopy Switch

For use on any size canopy or bracket back. $\frac{3}{4}$ -inch shank. Has No. 18 stranded R. C. leads.

No.	Finish	Each	10, 25, Ea. Ea.
I 1090	B. B.	8c	7c 6c
I 1091	Nickel	8c	7c 6c

Arrow Canopy Switch


Has ratchet handle.

BRUSH BRASS

No.	Stem	Each	10, Ea.
A1092	$\frac{3}{16}$ in. $8\frac{1}{2}$ c	7 $\frac{1}{2}$ c	6.51
A1093	$\frac{1}{4}$ in. $8\frac{1}{2}$ c	7 $\frac{1}{2}$ c	6.51

NICKEL FINISH

No.	Stem	Each	10, Ea.
A1094	$\frac{3}{16}$ in. $8\frac{1}{2}$ c	7 $\frac{1}{2}$ c	6.51
A1095	$\frac{1}{4}$ in. $8\frac{1}{2}$ c	7 $\frac{1}{2}$ c	6.51



Spring Action Rubber Handle Cap

Blades hold cap firmly in receptacle at all times due to impeding action. Made of moulded rubber.

No.	Each	10, Ea.	100
I 1077	4 $\frac{1}{2}$ c	4c	3.75

Link Type Levolver Switch



6 amp., 125 volts. Has link type construction for use in fixture chain. Available in brass, bronze or nickel finish. Specify.

No.	Each	10, Ea.
I 1085	50c	45c

Eagle Rubber Handle Cap

This sturdy, compact handle cap is practically indestructible. Suitable for any type of appliance.

No.	Each	25, Ea.	100
I 1078	4c	3c	2.75



Levolver Extension Arm



Fits over Levolver switch lever and prevents cord from rubbing against fixture. Available in brass, bronze, or nickel. Specify finish.

No.	Each	10, Ea.
I 1086	12c	9c


Arrow Canopy Switch



New, shallow pull type switch. Mechanism inclosed in brass shell. Complete with 4-foot pull cord.

No.	Each	10, Ea.	100
A1087	19c	16 $\frac{1}{2}$ c	14.26

McGill Canopy Switch

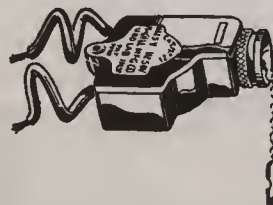

Pull type. Has adjustable stem. Easy to install.

No.	Each	10, Ea.
I 1088	23c	21c

Leviton Canopy Switch



Pull type. Smallest pull switch made. Measures $\frac{7}{8} \times \frac{1}{4}$ inches, $\frac{1}{4}$ -inch deep. Bakelite and brass construction.

No.	Each	10, Ea.	100
I 1089	16c	14c	12.40



Two-Circuit Canopy Switch

Rotary type. Has $\frac{3}{4}$ -inch shank.

No.	Amps.	Each	10, Ea.
I 1096	3	12c	10 $\frac{1}{2}$ c

Ball Cord Adjusters

Black enameled wood ball to take up slack in drop cords. Large size, $1\frac{1}{2}$ -inch diameter.

No.	Each	25, Ea.	100
I 1097	4c	3 $\frac{1}{2}$ c	2.95



The Handy Plug

A two-piece bakelite attachment cap with a patented feature that eliminates the necessity of wire skinning.

No.	Color	Each	25, Ea.
I 1079	Brown	8c	6c
I 1080	Ivory	10 $\frac{1}{2}$ c	8c

Bakelite Attachment Cap

Brown bakelite construction. Strong blades.

No.	Each	100	1000
I 1081	1 $\frac{1}{2}$ c	1.25	10.75



Arrow Bakelite Attachment Plug

Has double "T" slots. For 660 watts, 250 volts.


No.	Each	10, Ea.	100
A1082	30c	26c	22.63

Rodale Cord Connector



Standard heavy duty connector made of bakelite. Simple to wire. Cap and body complete.

No.	Each	10, Ea.	100
A1083	11c	10c	9.00




Insulated Staples

A high quality, newly improved insulated staple at a low price. Sharp points—nails easy without bending. Packed 100 to package. 1000 to standard carton.


No.	No.	Size	100	1000
I 1098	1	$\frac{1}{2}$ in.	9c	80c
I 1099	3	$\frac{3}{4}$ in.	9c	80c

Pull Socket Accessories

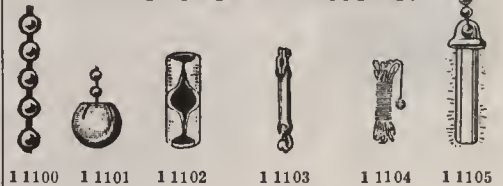

No.	Type	Each	Per 100
I 1100	Shot chain, per foot	2 $\frac{1}{2}$ c	2.00
I 1101	End bell for shot chain	1c	95c
I 1102	Bead chain connector	1c	75c
I 1103	Bead chain insulator	2 $\frac{1}{2}$ c	1.98
I 1104	6-foot pull cord	4c	3.00
I 1105	Luminous pendant	8c	7c


Carded Bead Chain



Three feet on card. Lacquered to prevent tarnishing.

No.	Finish	Card	10, Cd.
I 1106	Brass	7c	6 $\frac{1}{2}$ c

PLUGS, TAPS and ADAPTERS



Trio-Tap

Pin type. Made of bakelite. Sturdy construction. Standard parallel pins.

No.	Each	10, Ea.	100
I 800	4½c	4c	3.70



Bakelite Two-Way Plug

Has positive contact. Neat in appearance and sturdy. Finished in brown bakelite.

No.	Each	10, Ea.	100
I 808	8c	7c	6.50

Snap-It Nite Lite



Has adjustable shade. Gives mellow, soft ray of light.

No.	Each	10, Ea.
I 818	18c	10, Ea. 16c

Service Block

Brown bakelite 3-way service block with binding post screws. Sturdy construction. For extension cords.

No.	Each	10, Ea.	100
I 801	5½c	4¼c	4.50



Offset Two-Way Plug

Made of strong, brown bakelite. Bottom has threads for shade-holder.

No.	Each	10, Ea.	100
I 809	8c	7c	6.50



Dim-A-Lite

Will reduce or increase amount of light by regulating chain. Ideal for bedrooms.

No.	Each	10, Ea.
I 819	70c	65c



Convenience Outlet

Surface type. Screws to baseboard. Will accommodate two attachment caps. Brown bakelite.

No.	Each	10, Ea.	100
I 801	9c	8c	



Three-Way Outlet

Has one light and two appliance outlets. Made of brown bakelite.

No.	Each	10, Ea.	100
I 810	8c	7c	6.50

Three-Way Pull Socket

Screws into regular socket. Has two live appliance outlets and one pull chain socket.

No.	Each	10, Ea.	100
I 811	16c	14½c	13.00



Kitchen Pendant Switch


A switch for the kitchen. Fixture and three convenience outlets for appliances. Strong switch mechanism. Requires 3-wire cord for hookup. Brown bakelite.

No.	Each	10, Ea.
I 820	24c	10, Ea. 19c

Baseboard Outlet

Made of bakelite. Screws to baseboard supplying additional outlet. One or more can be tapped off same cord.

No.	Color	Each	10, Ea.
I 802	Brown	7c	6c
I 803	Ivory	8½c	7½c



Arrow Pendant Switch Current Tap.

Strong push thru switch. Has double "T" slot current-tap. Brown bakelite. Requires 3-wire cord.

No.	Each	10, Ea.
A 770	54c	47½c



Spring Action Trio-Tap

Strong and compact. Blades hold tap securely in receptacle. Brown bakelite.

No.	Each	10, Ea.	100
I 804	6½c	5¼c	4.96

Surface Receptacle



Duplex type. Mounts on baseboard or wall as permanent outlet. Screws included. Size, 1¼ x 3¼ x 5/8 inches.

No.	Color	Each	10, Ea.
I 812	Brown	7c	6½c
I 813	Ivory	10c	9c

Pin Type Adaptor

Changes receptacle into Edison base screw plug. Moulded rubber.

No.	Each	10, Ea.
I 805	7c	6c



Bakelite Feed-Thru Switch



Toggle type. Rugged in construction. Strong mechanism. Will operate most any appliance.

No.	Each	10, Ea.
I 821	13c	10, Ea. 11c

Pocket Tester



For testing circuits from 110 to 550 volts. Check any circuit. Lasts a lifetime. Glow light in head.

No.	List	Each
I 806	1.50	88c

Lumiline Caps



Deep back cap permits better grip on lamp. Two required for each lamp. Bakelite.

No.	Color	Each	10, Ea.
I 814	Black	5½c	4¼c
I 815	White	6½c	5c


Arrow Feed-Thru Switch



Rocker arm type. Has button to close end for use as pendant switch.

No.	Each	10, Ea.
A 771	31½c	23c

Neon Tester



Vest pocket size. Will test circuits from 110 to 550 volts. Unbreakable guard over neon tube.

No.	List	Each	10, Ea.
I 807	1.00	80c	70c

Lumiline Sockets

Bakelite. Binding posts on bottom permit straight and easy wiring.

No.	Color	Each	10, Ea.
I 816	Black	12c	9½c
I 817	White	17c	11c



Diamond Flasher Button

Guaranteed 1000 hours. Capacity up to 60 watts. The Beacon is slow flashing. The Twinkle is quick flashing.

No.	Type	Each	10, Ea.
I 822	Beacon	18c	17c
I 823	Twinkle	18c	17c



PLUG and CARTRIDGE FUSES



CLEARSITE PLUG FUSES

Standardize on clearsite. Fully approved by Underwriter's laboratory. Has famous drop out link. Shorts, overloads, or grounds indicated. Sizes may be assorted to obtain quantity prices.

No.	Amps.	Each	100
M420	10	3 1/2 c	3.00
M421	15	3 1/2 c	3.00
M422	20	3 1/2 c	3.00
M423	25	3 1/2 c	3.00
M424	30	3 1/2 c	3.00
M425	3	4c	3.50
M426	6	4c	3.50

Home Guard Plug Fuses

Low Price Leaders

The finest value in the low price field. Clear top makes it easy to determine fuse blown. A good leader for the hardware trade.



No.	Amps.	Each	100	Per M
M427	10	2 1/2 c	1.80	16.10
M428	15	2 1/2 c	1.80	16.10
M429	20	2 1/2 c	1.80	16.10
M430	25	2 1/2 c	1.80	16.10
M431	30	2 1/2 c	1.80	16.10

JEFFERSON "UNION" RENEWABLE FUSES



Jefferson renewable fuses are known to all classes of trade and industry for their dependable action and quality materials. The fuses are renewable completely by hand. They are manufactured to comply with the N. E. C. standards.

FERRULE TYPE

No.	Amps.	Each	10, Ea.
M432	6	20c	18c
M433	10	20c	18c
M434	15	20c	18c
M435	20	20c	18c
M436	25	20c	18c
M437	30	20c	18c




KNIFE BLADE TYPE

Blades are held in perfect alignment by extra heavy fibre bar.

No.	Amps.	Each	5, Ea.
M438	40	40c	36c
M439	50	40c	36c
M440	60	40c	36c
M441	70	90c	81c
M442	80	90c	81c
M443	90	90c	81c
M444	100	90c	81c
M445	150	2.00	1.80
M446	200	2.00	1.80
M447	400	4.00	3.60

RENEWABLE LINKS



No.	Amps.	Each	Per 100	No.	Amps.	Each	50, Ea.
M448	6	1c	90c	M457	70	4 1/2 c	4c
M449	10	1c	90c	M458	80	4 1/2 c	4c
M450	15	1c	90c	M459	90	4 1/2 c	4c
M451	20	1c	90c	M460	100	4 1/2 c	4c
M452	25	1c	90c	No.	Amps.	Each	25, Ea.
M453	30	1c	90c	M461	150	10c	9c
M454	40	2c	1.80	M462	200	10c	9c
M455	50	2c	1.80	No.	Amps.	Each	10, Ea.
M456	60	2c	1.80	M463	400	18c	16c

Prices on 600 volt fuses on request.

EDISON BASE FUSETRONS

Simply screw in in place of regular fuse. Will protect any type of circuit. Sure protection.

No.	Amps.	Each
M515	15	4 1/2 c
M516	20	4 1/2 c
M517	25	4 1/2 c
M518	30	4 1/2 c



CARTRIDGE FUSES



Not renewable. 6 to 60 amps. Ferrule type. Over 60 amps. Knifeblade. 250 volts.

APPROVED

No.	Amps.	No.	Amps.	No.	Amps.	No.	Amps.
M464	6	M470	35	M475	70	M480	110
M465	10	M471	40	M476	80	M481	150
M466	15	M472	45	M477	85	M482	200
M467	20	M473	50	M478	90		
M468	25	M474	60	M479	100		
M469	30						
		Each	10, Ea.		100, Ea.		
6 to 30 amps.		4c	3 1/2 c		3c		
35 to 60 amps.		8c	7c		6 1/2 c		
70 to 100 amps.		Each	10, Ea.		50, Ea.		
		37c	33c		30c		
110 to 200 amps.		Each	5, Ea.		30, Ea.		
		75c	70c		65c		

100 Assorted — Take Lowest Price.

BUSS FUSETATS



Gives all the protection that a fuse does and in addition the long lag feature keeps the fusetat from popping

out on harmless overloads. Simply use the fusetat rated at the next higher amperage to your load except where motors carry overload for a while, then use at least one with a 20% greater rating.

FUSETATS — ADAPTORS

No.	Amps.	No.	Amps.	No.	Amps.	No.	Amps.
M483	1	M491	6.25	M499	1	M507	6.25
M484	1.25	M492	8	M500	1.25	M508	8
M485	1.6	M493	10	M501	1.6	M509	10
M486	2	M494	12	M502	2	M510	12
M487	2.5	M495	15	M503	2.5	M511	15
M488	3.2	M496	20	M504	3.2	M512	20
M489	4	M497	25	M505	4	M513	25
M490	5	M498	30	M506	5	M514	30

FUSETAT PRICES

	Each	35, Ea.	100, Ea.
1 to 14 amps.	11c	10c	9c
15 to 30 amps.	Any quantity.	Each	5c

FUSETAT ADAPTOR PRICES

	Each	35, Ea.	200, Ea.
1 to 14 amps.	6c	5 3/4 c	5c
15 to 30 amps.	Any quantity.	Each	5c

BUSS CARTRIDGE TYPE FUSETRONS

Built in same dimensions as N. E. C. fuses — 250 volts.



No.	Amps.	No.	Amps.	No.	Amps.
M519	1	M526	5	M533	25
M520	1.25	M527	6.25	M534	30
M521	1.6	M528	8	M535	35
M522	2	M529	10	M536	40
M523	2.5	M530	12	M537	45
M524	3.2	M531	15	M538	50
M525	4	M532	20	M539	60

PRICES ON ABOVE

Type	Each	10, Ea.	Per 100
1 to 20 amps. inc.	15c	14 1/2 c	12.00
25 to 30 amps.	19c	18c	15.00
30 to 60 amps. inc.	38c	36c	30.00

DECORATIVE SWITCH PLATES

UNILINE
TRADE MARK

BAKELITE SWITCH PLATES



Toggle



Duplex



Single



Push

100 gangs assorted take 100 lot price.

Single Gang Toggle

No.	Color	Each	10, Each	100
P101	Brown	5c	4 1/4 c	3.72
P201	Ivory	9c	8c	6.82

Two Gang Toggle

P102	Brown	9 3/4 c	8 3/4 c	7.44
P202	Ivory	18c	15 3/4 c	13.64

Three Gang Toggle

P103	Brown	14 3/4 c	13c	11.16
P203	Ivory	27c	23 3/4 c	20.46

Four Gang Toggle

P104	Brown	19 3/4 c	17 1/4 c	14.88
P204	Ivory	36c	31 3/4 c	27.28

Five Gang Toggle

P105	Brown	79c	69 1/2 c	59.83
P205	Ivory	1.02	90c	77.50

Six Gang Toggle

No.	Color	Each	10, Each	100
P106	Brown	95c	83 1/2 c	71.92
P206	Ivory	1.23	1.08	93.00

1-Gang Push Switch Plates



No.	Color	Each	10, Each	100
P107	Brown	5c	4 1/4 c	3.72

Duplex Receptacle Plates

No.	Color	Each	10, Each	100
P108	Brown	5c	4 1/4 c	3.72
P208	Ivory	9c	8c	6.82

UNILINE
TRADE MARK

BAKELITE SWITCH PLATES



100 gangs assorted take 100 lot price.

Two Gang Duplex Receptacle Plates

No.	Color	Each	10, Each	100
P109	Brown	9 3/4 c	8 3/4 c	7.44
P209	Ivory	18c	15 3/4 c	13.64

Single Receptacle Plates

No.	Color	Each	10, Each	100
P110	Brown	5c	4 1/4 c	3.72
P210	Ivory	9c	8c	6.82

1-Gang Blank Switch Plates

No.	Color	Each	10, Each	100
P111	Brown	5c	4 1/4 c	3.72
P211	Ivory	9c	8c	6.82

2-Gang Combination Plates

For Composition handle tumbler switches.

Toggle Switch and Duplex Receptacles

No.	Color	Each	10, Each	100
P112	Brown	9 3/4 c	8 3/4 c	7.44
P212	Ivory	18c	15 3/4 c	13.64

3-Gang 2-Toggle and 1-Duplex

No.	Color	Each	10, Each	100
P113	Brown	24 1/2 c	21 1/2 c	18.60
P213	Ivory	37c	32 1/2 c	27.90

Four Gang, 3-Toggle and 1-Duplex

No.	Color	Each	10, Each	100
P114	Brown	77 1/2 c	68c	58.59
P214	Ivory	96c	84 1/4 c	72.54

2-Gang, 1-Toggle and 1-Single Receptacle

No.	Color	Each	10, Each	100
P115	Brown	9 3/4 c	8 3/4 c	7.44

3-Gang, 2-Toggle and 1-Single Receptacle

No.	Color	Each	10, Each	100
P116	Brown	24 1/2 c	21 1/2 c	18.60

Chromium Plated Plates



Beautiful polished chrome plated. Switch plates on .040 brass base. 100 gangs assorted take 100 lot price.

No.	Type	Each	10, Ea.
P121	1 Gang Toggle	10c	9c
P122	2 Gang Toggle	20c	18c
P123	3 Gang Toggle	30c	27c
P124	4 Gang Toggle	40c	36c
P125	1 Gang Push	10c	9c
P126	2 Gang Push	20c	18c
P127	3 Gang Push	30c	27c
P128	1 Gang Duplex	10c	9c
P129	2 Gang Duplex	20c	18c
P130	1 Gang Single Recpt.	10c	9c
P131	Comb. Toggle and Dup.	20c	18c
P132	2 Toggle and Duplex	30c	27c


Brass Switch Plates



Durable sprayed brass finish on steel base. 100 gangs assorted take 100 lot price.

No.	Gang	Type	Ea.	100
P141	1	Toggle	3c	2.25
P142	2	Toggle	6c	4.50
P143	3	Toggle	12c	9.00
P144	4	Toggle	20c	18.00
P145	5	Toggle	95c	91.00
P146	1	Push Sw.	3c	2.25
P147	2	Push Sw.	6c	4.50
P148	3	Push Sw.	12c	9.00
P149	1	Blank	7c	6.25
P150	1	Sing. Rec.	3c	2.25
P151	1	Duplex	3c	2.25
P152	2	Duplex	6c	4.50
P153	2	Com. Tog.-Dup.	6c	4.50

Mirror Switch Plates



Heavy plate glass mirror plates with bevel edges. Countersunk holes. Fine quality finish.

No.	Type	Each	10, Ea.
P221	1-G. Toggle	19c	17c
P222	2-G. Toggle	38c	34c
P223	3-G. Toggle	57c	51c
P224	4-G. Toggle	76c	68c
P225	1-G. Push	19c	17c
P226	2-G. Push	38c	34c
P227	3-G. Push	57c	51c
P228	Sing. Receptacle	19c	17c
P229	Duplex Receptacle	19c	17c
P230	Com. Tog. and Dup.	38c	34c

WE PAY THE FREIGHT
ON ALL ORDERS OF
\$50.00 OR MORE.

SQUARE "D" SERVICE SWITCHES

MAIN AND LIGHTING CIRCUITS



Accessible main fuse type without externally operated switch. These switches are equipped with swing out interiors for easy wiring and are equipped with solderless connectors. Drop door type. Pulling down the door opens the circuit. Dead front. Required in various states and cities by law. When door is open the main fuses are dead. Main fuses are accessible only when door is open. 2 pole, 30 amp., 125 volt A.C. and 3 pole, 30 amp., 125-250 volt A. C.

SWITCH WITHOUT BRANCH CIRCUITS

No.	Mfg. No.	Pole	Main Fuse	Neutral	Each	\$25.00 Net, Ea.
H1600	33021	2	1	Solid	2.48	2.25
H1601	33001	2	2	None	3.03	2.75
H1602	33031	3	2	Solid	3.03	2.75

WITH 2 BRANCH CIRCUITS — PLUG FUSES


No.	Mfg. No.	Pole	Main Fuse	Neutral	Each	\$25.00 Net, Ea.
H1603	33221	2	1	Solid	3.03	2.75
H1604	33201	2	2	None	3.58	3.25
H1605	33231	3	2	Solid	3.58	3.25

WITH 4 BRANCH CIRCUITS — PLUG FUSES

No.	Mfg. No.	Pole	Main Fuse	Neutral	Each	\$25.00 Net, Ea.
H1606	33421	2	1	Solid	3.85	3.50
H1607	33401	2	2	None	4.40	4.00
H1608	33431	3	2	Solid	4.40	4.00

ACCESSIBLE FUSE METER SERVICE SWITCHES

Main fuses are accessible when switch door is closed and sealed. Absolutely safe. Fuses can be renewed when switch is in off position. Does not have any branch circuits. Equipped with auxiliary test disconnects. 30 amp. plug fuse, 125 volts.



125-250 VOLTS, SINGLE PHASE, AND D.C.

No.	Mfg. No.	Pole	Fuses	Neutral	Each	\$25.00 Net, Ea.
H1609	30231	2	1	Solid	3.58	3.25
H1610	30211	2	2	None	4.13	3.75
H3778	30331	3	2	None	4.40	4.00

WITHOUT TEST FACILITIES — SOLID NEUTRAL

No.	Mfg. No.	Amps.	Poles	Fuses	Each	\$25.00 Net, Ea.
H1611	10371	30	3	2 Cart.	4.68	4.25
H1612	10312	60	3	2 Cart.	7.43	6.75
H1613	10313	100	3	2 Cart.	12.11	11.00
H1614	10314	200	3	2 Cart.	34.50	34.50
H1615	10315	400	3	2 Cart.	75.00	75.00

POLYPHASE TYPE — WITHOUT TEST FACILITIES

No.	Mfg. No.	Amps.	Poles	Fuses	Each	\$25.00 Net, Ea.
H1616	10391	30	3	3 Cart.	9.90	9.00
H1617	10392	60	3	3 Cart.	13.75	12.50
H1618	10393	100	3	3 Cart.	22.00	20.00
H1619	10394	200	3	3 Cart.	37.50	37.50
H1620	10395	400	3	3 Cart.	78.25	78.25

PANELBOARDS

Send us the specifications on any type of power panels you may be in need of. We are in a position to quote exceedingly low prices on quality material.

SQUARE "D" PULL OUT SWITCHES

AVAILABLE FOR MAIN, RANGE AND BRANCH CIRCUITS.

Sturdy, compact pull out blocks, fully approved. Cabinet has plenty of wiring space. Dead front type. Branch circuits available as below listed. Galvanized finished cabinet.



WITHOUT RANGE FUSES — 60 AMPS. — SURFACE

No.	Mfg. No.	Type	Branch Circuits	Each	\$25.00 Net, Ea.
H1621	39132	3 P.-S. N.	0	3.41	3.10
H1622	39332	3 P.-S. N.	2	4.51	4.10
H1623	39532	3 P.-S. N.	4	4.68	4.25
H1624	39732	3 P.-S. N.	6	7.04	6.40
H1625	39932	3 P.-S. N.	8	9.63	8.75

WITH RANGE FUSES — 60 AMPS. — SURFACE

No.	Mfg. No.	Type	Branch Circuits	Each	\$25.00 Net, Ea.
H1626	33182S	3 P.-S. N.	0	5.22	4.75
H1627	33382S	3 P.-S. N.	2	5.22	4.75
H1628	33582S	3 P.-S. N.	4	4.71	4.28
H1629	39782	3 P.-S. N.	6	7.98	7.25

WITH RANGE FUSES — 60 AMPS. — FLUSH

No.	Mfg. No.	Type	Branch Circuits	Each	\$25.00 Net, Ea.
H1630	33182F	3 P.-S. N.	0	5.78	5.25
H1631	33382F	3 P.-S. N.	2	5.78	5.25
H1632	33582F	3 P.-S. N.	4	5.26	4.78
H1633	37782	3 P.-S. N.	6	7.98	7.25

SERVICE SWITCH WITH FUSELESS MAINS

Equipped with branch lighting. Circuits and range circuit as below listed. Main switched by means of a heavy toggle switch inside of the cover. Range circuit. Pull out type.

SURFACE MOUNTING

No.	Mfg. No.	30 Amp. Plug Fuses	Range Fuses	Each	\$25.00 Net, Ea.
H1634	32482	4	0	3.58	3.25
H1635	32582	4	2	4.57	4.15
H1636	32682	6	0	4.13	3.75

FLUSH MOUNTING

No.	Mfg. No.	30 Amp. Plug Fuses	Range Fuses	Each	\$25.00 Net, Ea.
H1637	32472	4	0	3.85	3.50
H1638	32572	4	2	5.12	4.65
H1639	32672	6	0	4.40	4.00

SQUARE "D" BLUE LABEL SWITCHES

Single throw — fusible — front action. Convenient to use. 30 amp.

No.	Mfg. No.	Fuses	Neut.	Each	\$25.00 Net, Ea.
H1640	90211	1 Plug	Solid	88c	80c
H1641	93211	2 Plug	Solid	94c	85c
H1642	90311	2 Plug	Solid	1.10	1.00
H1645	93251	2 Cart.	Solid	1.21	1.10

DEAD FRONT TYPE

No.	Mfg. No.	Fuses	Neut.	Each	\$25.00 Net, Ea.
H1646	93211C	2 Plug	Solid	1.38	1.25



SQUARE "D" SWITCHES and PANELS

GENERAL PURPOSE SAFETY SWITCHES



Fusible, single throw type. All switches over 60 amperes, quick make, quick break. Has plenty of wiring room. Self aligning jaws assure perfect contact. Aluminum finish.


No.	Mfg. No.	Amps.	Poles	Fused Poles	Neutral	Each	\$50. Net Ea.
H1647	99211C	30	2	2 Plug		94c	85c
H1648	97211C	30	2	1 Plug	Solid	88c	80c
H1649	99311	30	3	3 Plug		1.87	1.70
H1650	97311C	30	3	2 Plug	Solid	1.10	1.00
H1651	98251C	30	2	2 Cart.		1.21	1.10
H1652	97251C	30	2	1 Cart.	Solid	1.38	1.25
H1653	99351C	30	3	3 Cart.		2.25	2.05
H1654	97351C	30	3	2 Cart.	Solid	1.87	1.70
H1655	96252C	60	2	2 Cart.		3.41	3.10
H1656	96352C	60	3	3 Cart.		4.35	3.95
H1657	97312C	60	3	2 Cart.	Solid	3.41	3.10
H1658	96253	100	2	2 Cart.		8.25	7.50
H1659	96353	100	3	3 Cart.		9.08	8.25
H1660	97313	100	3	2 Cart.	Solid	8.53	7.75
H1661	97413	100	4	3 Cart.	Solid	13.75	12.50
H1662	96254	200	2	2 Cart.		13.75	12.50
H1663	96354	200	3	3 Cart.		17.33	15.75
H1664	97314	200	3	2 Cart.	Solid	15.13	13.75
H1665	97414	200	3	3 Cart.	Solid	22.83	20.75
H1666	97315	400	3	2 Cart.	Solid	48.03	43.75
H1667	96355	400	3	3 Cart.			46.25
H1668	97415	400	4	3 Cart.	Solid		56.25
H1669	97316	600	3	2 Cart.	Solid		69.00
H1670	96356	600	3	3 Cart.	Solid		72.00
H1671	97416	600	4	3 Cart.	Solid		98.75

NOT FUSABLE TYPE—250 VOLT

No.	Mfg. No.	Amps.	Poles	Each	\$50 Net Ea.
H1762	91251	30	2	1.10	1.00
H1763	91351	30	3	1.93	1.75
H1764	91252	60	2	3.03	2.75
H1765	91352	60	3	4.13	3.75
H1766	91253	100	2	7.70	7.00
H1767	91353	200	3	8.25	7.50
H3768	91453	100	4	14.57	13.25
H3769	91254	200	2	11.83	10.75
H3770	91354	200	3	15.95	14.50
H3771	91454	200	4	44.75	22.50
H3772	91255	400	2	31.08	28.25
H3773	91355	400	3	39.33	35.75
H3774	91455	400	4	51.70	47.00
H3775	91256	600	2	52.25	47.50
H3776	91356	600	3	62.15	56.50
H3777	91456	600	4	103.40	94.00


SQUARE "D" RAINTITE SWITCHES

Standard general purpose switches in galvanized Raintite boxes. Does not include conduit hubs. Box can be locked. No wooden box protection is necessary.



No.	Mfg. No.	Amps.	Poles	Fuses	Neutral	Each	\$25 Net. Ea.
H1768	97211R	30	2	1 Plug	Solid	2.48	2.25
H1769	99211R	30	2	2 Plug		2.64	2.40
H1770	97311R	30	3	2 Plug	Solid	2.81	2.55
H1771	98251R	30	2	2 Cart.		2.75	2.50
H1772	96351R	30	3	2 Cart.	Solid	4.95	4.50
H1773	97312R	60	3	2 Cart.	Solid	5.99	5.45
H1774	96352R	60	3	3 Cart.		6.82	6.20
H1775	97313R	100	3	2 Cart.	Solid	12.10	11.00
H1776	97353R	100	3	3 Cart.		13.20	12.00

SQUARE "D" FUSE CABINETS



Highest quality materials and careful workmanship makes these panels superior in every respect. Dead front design. Furnished with 1½-inch wiring gutters. For 2- or 3-wire service—solid neutral.

FLUSH MOUNTING TYPE

No.	Mfg. No.	No. Fuse Receptacles	Each
H1777	37221	2	1.10
H1778	37421	4	1.45
H1779	37621	6	2.42
H1780	37821	8	3.65
H1781	37021	10	5.35
H1782	37121	12	7.27

SURFACE MOUNTING TYPE

No.	Mfg. No.	No. Fuse Receptacles	Each
H1783	39211	2	1.10
H1784	39411	4	1.45
H1785	39611	6	2.42
H1786	39811	8	3.65
H1787	39011	10	5.35
H1788	39111	12	7.27

SQUARE "D" FUSE PANELETTES



The following line of panelettes is designed to accommodate single pole, double pole, 3-way, and 4-way switches. Available in flush or surface mounting. Price does not include switches. Knockout provisions for switches are numbered as to their identity.

SURFACE MOUNTING

No.	No. Fuse Receptacles	List Price	Each
SS4	4	6.30	3.15
SS6	6	8.70	4.35
SS8	8	11.65	5.82
SS10	10	14.55	7.27
SS12	12	17.45	8.72

FLUSH MOUNTING

No.	No. Fuse Receptacles	List Price	Each
FS4	4	6.30	3.15
FS6	6	8.70	4.35
FS8	8	11.65	5.82
FS10	10	14.55	7.27
FS12	12	17.45	8.72

BRANCH CIRCUIT ATTACHMENTS



Convenient to use under the meter fitting. Complete with nipple for ½-inch knockout. Surface type only.

No.	Mfg. No.	Circuits	Each
H1789	39271	2	1.45
H1790	39471	4	1.85
H1791	39671	6	2.95

SQUARE D MULTI-BREAKERS—LOAD CENTERS




With the strides made in its development in the past few years, the circuit breaker is now universally acknowledged as the ideal form of circuit protection for homes, shops and commercial buildings. Square "D" has opened the field to volume use of its Multi-Breakers by reducing the costs to that of standard switches. This has been accomplished by reducing the parts in the unit itself and ganging these units to suit the requirement.

The Multi-Breaker has been approved by the Underwriters' Laboratories, Inc. as service equipment and may be installed with wiring details to meet local requirements. Power companies recognize the Multi-Breaker as a device that offers a protection against tampering with circuit protection as well as a convenience to users. While adequate protection is assured, it will not trip out on momentary loads, which would ordinarily cause a fuse to blow.

For flush mounting add "F" to catalog number.


For surface mounting add "S" to catalog numbers.

For use on A.C. 3-wire S/N 115-230 volts.

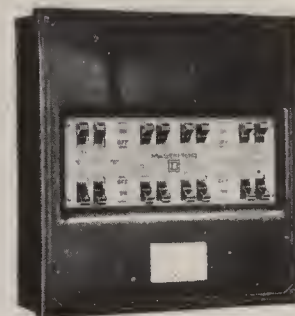

No. of Main or Branch Circuits	1-Pole Breakers	2-Pole Breakers	GROUNDED SOLID NEUTRAL			INSULATED SOLID NEUTRAL		
			Cat. Number	Each	Box No.	Cat. Number	Each	Box No.
3	2-15A	1-50A	25021-51	5.85	2	35021-51	6.18	3
4	4-15A		25040-01	5.85	2	35040-01	6.18	3
5	4-15A	1-50A	25041-51	7.15	2	35041-51	7.48	3
5	3-15A 1-20A	1-50A	25041-56	7.15	2	35041-56	7.48	3
6	6-15A		25060-01	7.15	2	35060-01	7.48	3
6	5-15A 1-20A		25060-21	7.15	2	35060-21	7.48	3
7	6-15A	1-50A				35061-51	8.78	3
8	8-15A					35080-01	8.78	3
10	10-15A					57100-01	18.20	5
12	12-15A					57120-01	19.50	5
14	14-15A					57140-01	18.50	5
16	16-15A					57160-01	22.75	5

TYPE MO SQUARE D MULTI-BREAKER

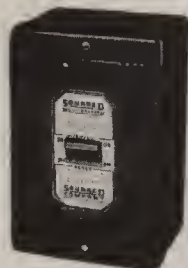


Here is at last a small circuit breaker with a cost so low that it will replace 30 amp. type "D" A.C. general purpose switches. Has rated capacities of 15, 20, 25 amperes. No parts to replace after overload or short trips it out, simply reset lever and circuit is again closed. Entirely safe as no parts are exposed even when resetting trip.

For surface mounting type add "S" to catalog number.

For flush mounting type add "F" to catalog number.

2-WIRE S/N 115 VOLTS A.C.			
Catalog No.	1-Pole Breakers	2-Pole Breakers	Each
121110	1-15A		1.30
121120	1-20A		1.30
121711	2-15A		1.72
131722	2-20A		1.72
121712	1-15A 1-20A		1.72
3-WIRE S/N 115-230 VOLTS A.C.			
Catalog No.	1-Pole Breakers	2-Pole Breakers	Each
121611		1-15A	1.72
121622		1-20A	1.72
121633		1-25A	1.72
2-POLE 115-230 VOLTS A.C.			
Catalog No.	1-Pole Breakers	2-Pole Breakers	Each
111611		1-15A	1.56
111622		1-20A	1.56
111633		1-25A	1.56

SQUARE D LOAD CENTERS

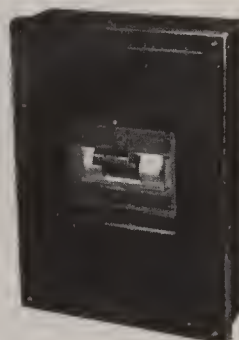


These larger size breakers are made to replace 60 amp. and 100 amp. service switches. Approved fully by Underwriters' Laboratories, Inc. General construction similar to Square "D" type Mo breakers. These breakers are manufactured at a cost comparable to standard style "D" safety switches. Applicable to shops, stores, industrials, etc. The convenience of not having to replace a part when the breaker trips out, more than compensates for its use. Available in surface type.

3-WIRE S/N 115-230 VOLTS A.C.			
Catalog No.	2-Pole Breakers	List Price	Each
16344	1-35A	6.00	3.90
16355	1-50A	6.00	3.90
333270	1-70A	16.50	10.73
333290	1-90A	16.50	10.73
333216	1-100A	16.50	10.73
2-POLE 115-230 VOLTS A.C.			
Catalog No.	2-Pole Breakers	List Price	Each
313270	1-70A	15.00	9.75
313290	1-90A	15.00	9.75
313216	1-100A	15.00	9.75

SIGNAL ELECTRIC EXHAUST FANS


Kitchen Vent Fans

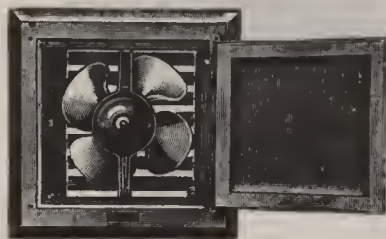

Built for permanent installation. Adjustable in thickness from 7 in. to 13 in. Inside and outside frames are polished aluminum. Adjustable box made of steel. Automatic switch and shutters. 10-inch silent blade fan. Available for either A.C. or D.C. current.

No.	Voltage	List	Each
E1400	110-120 v., A.C.,	32.00	20.80
E1401	110-120 v., D.C., 25-60	35.00	22.75


Bucket Blade Fan



Heavy duty. Motor self cooled. Frame reinforced cast iron. For commercial uses where large displacement is needed.

No.	Size	Voltage	List	Each
E1402	12 in.	110-120 v., A.C., 60	24.00	15.60
E1403	12 in.	110-120 v., D.C.,	26.40	17.16
E1404	16 in.	110-120 v., A.C., 60	36.00	23.40
E1405	16 in.	110-120 v., D.C.,	39.60	25.74
E1406	18 in.	110-120 v., A.C., 60	48.00	31.20
E1407	18 in.	110-120 v., D.C.,	52.80	34.32


Window Ventilator

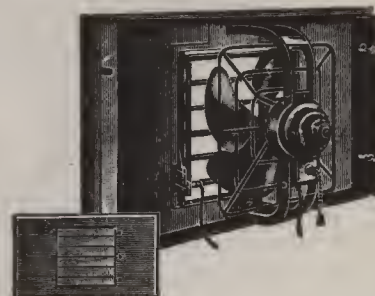

Removes smoke, odors and steam rapidly from a room. Provides a steady flow of fresh air. Adjustable. Fits windows from 24 in. to 37 in. The 10-inch silent blade fan moves 530 cu. ft. of air per minute. Finished in French gray enamel. Frame measures 13 3/8 in. high.

No.	List	Each
E1408	18.50	12.02


Flat Blade Vent Fan



For use in offices, small stores, wash-rooms, kitchens, classrooms, etc. Has 6 blades pitched for maximum air delivery. Fan supports are cast iron. For 110-120 v. A.C. current.

No.	Size	Blades	List	Each
E1409	10 in.	4	16.50	10.73
E1410	12 in.	6	20.25	13.16
E1411	16 in.	6	22.50	14.63

Signal Automatic Shutters



Designed to provide protection on the outside when the fan is not in operation. Vanes made of quality aluminum. Opens automatically when fan starts. Cannot be opened by the wind.

No.	Size	List	Each
E1412	10 in.	5.50	3.58
E1413	12 in.	6.25	4.07
E1414	16 in.	8.25	5.37
E1415	18 in.	9.50	6.18
E1416	24 in.	13.50	8.77

PORCELAIN and METAL REFLECTORS

Dome Reflector



Porcelain enamel. Green outside, white inside. 2 1/4-inch fitter.

No.	Size	Each	10, Ea.
R1417	12 in.	69c	65c
R1418	14 in.	80c	76c
R1419	16 in.	95c	90c

Standard Dome



White inside, green outside. Socket tapped for 1/2 inch.

No.	Size	Each	10, Ea.
R1420	12 in.	1.22	1.15
R1421	14 in.	1.30	1.22
R1422	16 in.	1.53	1.44

Sign Reflector



Horizontal Hood and Socket

No.	Size	Each	10, Ea.
R1423	8 in.	1.76	1.54
R1424	10 in.	2.00	1.75

Vertical Hood and Socket

No.	Size	Each	10, Ea.
R1425	8 in.	1.76	1.54
R1426	10 in.	2.00	1.75

Aluminum Reflector



2 1/4-inch fitter.

Straight Type

No.	Size	Each	10, Ea.
R1427	7 1/2 in.	47c	43c
R1428	9 in.	62c	57c

Angle Type

No.	Size	Each	10, Ea.
R1429	7 1/2 in.	47c	43c
R1430	9 in.	62c	57c

Shallow Dome



Porcelain steel enamel. Green outside, white inside. 2 1/4-inch fitter.

No.	Dia.	Each	10, Ea.
R1431	10 in.	34c	32c
R1432	12 in.	42c	40c
R1433	14 in.	55c	50c

Shallow Dome



Porcelain steel enamel. Socket tapped for 1/2 inch.

No.	Dia.	Each	10, Ea.
R1434	12 in.	1.22	1.15
R1435	14 in.	1.30	1.22
R1436	16 in.	1.53	1.44

Swivel Hanger



Made of cast iron. Ball threaded for 1/2-inch conduit. Fits 3 1/4- or 4-inch box.

No.	Each	10, Ea.
R1437	24c	21c

Tin Cone Shades




2 1/4-inch fitter. Green outside, white inside.

No.	Dia.	Each	Doz.
R1438	8 in.	16c	1.75
R1439	10 in.	18c	2.04
R1440	12 in.	35c	3.95

TOOLS, SOLDER and PASTE

1/4-inch Standard Drill



SIGNAL

High quality drill with 1/4-inch chuck. Designed for intermittent service. Well balanced, air cooled handle with comfortable grip. Adaptable for radio work, wood and metal assembly and kindred applications. 8 feet of heavy duty cord with standard plug furnished. For use on 110-120 volt, A.C. or D.C., 25-60 cycles.

No.	List	Each
OB8	19.50	12.68

Linemen's Pliers



The finest linemen's pliers made. Manufactured by Kraeuter. Steel tested for strength, hardness and cutting power.

No.	Size	Each
T1320	6 in.	1.63
T1321	7 in.	1.75
T1322	8 in.	2.11

Side Cutting Pliers



Every electrician should have a pair of these pliers. Longer jaws and forged from special plier steel.

No.	Size	Each
T1323	5 1/2 in.	1.30
T1324	6 in.	1.36
T1325	7 1/2 in.	1.56

Combination Pliers



These well-made sturdy pliers are designed to meet the demand for medium price good quality pliers.

No.	Size	Each
T1326	6 in.	20c
T1327	8 in.	30c


Star Drills



Forged from 0.90 carbon tool steel. Has extra long grooves. Length, 12 inches.

No.	Face Dia.	Each
T1328	1/4 in.	19c
T1329	3/8 in.	19c
T1330	1/2 in.	22c


1/2-inch Signal Drill

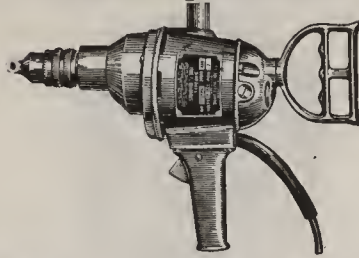

Standard duty drill with 1/2-inch chuck. Plenty of power, durability, proper speed and correct balance, are some of the features embodied in this drill. Used extensively for general production and maintenance work. Has 15-foot heavy duty cord. For use on 110-120 volt A.C. or D.C., 25-60 cycles.

No.	List	Each
OB5	47.50	30.88

American Beauty Electric Soldering Irons

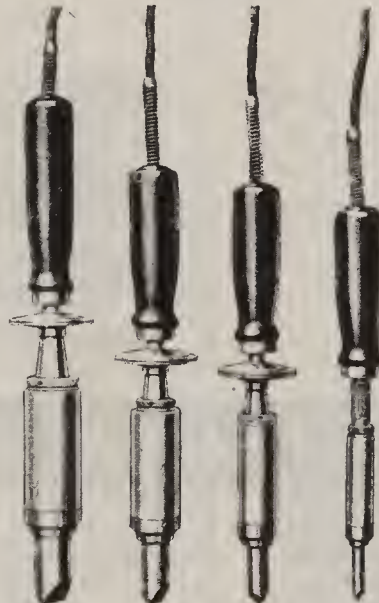

T1334 T1333 T1332 T1331

Hundreds of thousands of satisfied users term these irons as the best made. These irons are built up from the finest materials money can buy. Stands are supplied with every iron. Will operate on either A.C. or D. C. current.

No.	Tip	Watts	List	Each
T1331	3/8 in.	100	7.20	4.79
T1332	5/8 in.	200	8.60	5.72
T1333	7/8 in.	300	11.50	7.67
T1334	1 1/8 in.	550	15.00	9.98

Crescent Soldering Paste



Non-corrosive. Does not flow away. Put up in tins.

No.	Size	Each	12, Ea.
I 1335	2-oz.	10c	8c
I 1336	1-lb.	42c	38c

1/4-inch Heavy Duty Drill




NATIONALLY KNOWN

A heavy duty 1/4-inch drill with plenty of power. Has 1700 r.p.m. speed with no load. Bronze bearings. Measures 12 3/8 inches long. 8-foot rubber cord.

No.	List	Each
OB4	24.50	15.92

High Quality Solder



Wire Solder on Spools

No.	Spool	Per Lb.
M1337	1-lb.	52c
M1338	5-lb.	50c

Acid Core Solder on Spools

No.	Spool	Per Lb.
M1339	1-lb.	62c
M1340	5-lb.	58c

Rosin Core Solder

No.	Spool	Per Lb.
M1341	1-lb.	62c
M1342	5-lb.	58c

Ribbon Solder

Ribbons approximately 15 inches long.

No.	1-lb.	Per Lb.
M1343	52c	
M1344	50c	

Bar Solder

No.	Lbs.	Per Lb.
M1345	1	45c
M1346	10	43c

Remember to Deduct
2% Cash Discount on
All Orders.

Bull Dog Tape



Wrapped in foil and individual carton.


No.	Size	Each	10, Ea.
M1347	8-oz.	17c	15 1/2c
M1348	4-oz.	9 1/2c	8c
M1349	2-oz.	5c	4 1/4c
M1350	1-oz.	3c	2 1/2c

Rubber Tape

No.	Size	Each	10, Ea.
M1351	8-oz.	19c	17 1/2c
M1352	4-oz.	10 1/4c	9c

CORD SETS—REPLACEMENT ELEMENTS

Switchless Franklin Cord Sets

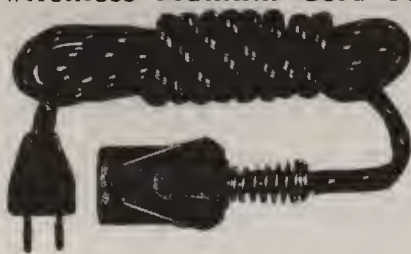

A standard 7-foot, 16-gauge cord set with Underwriters' approved plug and unbreakable rubber cap.


No.	List	Each	12, Ea.
I 825	49c	39c	29 1/2c

WITH "E-Z IRON"

Same as above except equipped with bracket and spring so that cord floats above the work.

No.	List	Each	12, Ea.
I 826	69c	55c	41 1/2c

SWITCHED FRANKLIN CORD SETS

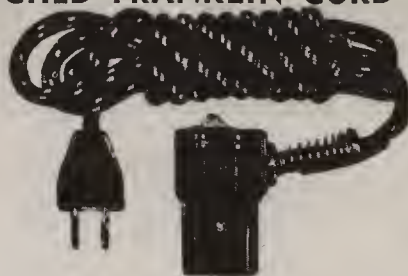

Has 7 feet of No. 16 gauge good grade heater cord. Switch plug is strongly built and will operate with safety.


No.	List	Each	12, Ea.
I 830	59c	47c	35 1/2c

WITH "E-Z IRON"

Same as above except equipped with bracket and spring so that cord floats above the work.


No.	List	Each	12, Ea.
I 831	79c	62c	47 1/2c

Heater Cord Set



Six-foot switchless type with bakelite plug. Listed as standard by the Underwriters' Laboratories, Inc.

No.	List	Each	10, Ea.	50, Ea.
A 827	53c	43c	38c	33c




Leader Cord Set

Exceptionally heavy cord set individually packed. Will give long, satisfactory service.

No.	Each	10, Ea.	50, Ea.
I 832	29c	25c	21c

Nichrome Heater Elements



Genuine nichrome wire elements.

No.	Watts	Each	10, Ea.
I 836	600	20c	18c
I 837	1000	35c	33c


Rodale Cord Set



Quality cord set at a low price. Has bakelite heater plug and rubber cap. Six-foot cord.

No.	Each	10, Ea.	100
I 828	22 1/2c	19 1/2c	17c

Tri-Tap Set



Meets the need for a handy extension set in every home, shop, office, etc. Nine feet in length.

No.	Each	10, Ea.
I 833	23c	21c


Standard Iron Element



Fits most any iron. 110 volts, 575 watts.

No.	Each	10, Ea.
I 838	19c	17c


Copper Clad Iron Element



Fits almost all types of non-automatic irons. High grade.

No.	Each	6, Ea.
I 839	24c	22c

Curling Iron Element



Adaptable to most any curling iron.

No.	Each	10, Ea.
I 840	11c	9c

Arrow Cord Sets



With Bakelite Switch Plug. Equipped with 6 ft. of cord. Strong, long life contacts in plug.

Individually packaged.

No.	Each	10, Ea.	50, Ea.
A 829	56 1/2c	50c	42c

Table Tap



Four-way. Genuine bakelite construction. Six-foot cord. Brown.

No.	Each	6, Ea.
I 834	26c	24c


Eagle Trouble Light



Heavy duty. Has 20-foot extension switch in socket handle. Has quicklock guard.

No.	Each	10, Ea.
I 835	1.32	99c

Toaster Element



Designed to fit 90% of the toasters on the market. High grade nichrome wire wound on mica.

No.	Each	10, Ea.
I 841	45c	40c


EVEREADY FLASHLIGHTS and BATTERIES



Two-Cell Standard

Latest style. Finished in black and chrome. Takes two No. 950 cells. Prefocused lamp—positive switch. Free display when six are purchased.


No.	Er. No.	List	Each
N2100	2251	80c	56c



De Luxe Model

Focusing type. Chrome plated on brass. Prefocused type. Uses No. 950 cells.

2-CELL TYPE			
No.	Er. No.	List	Each
N2101	8251	1.15	77c
3-CELL TYPE			
No.	Er. No.	List	Each
N2102	8351	1.35	88c



Three-Cell Focusing

Has 800-ft. range. Chrome finish—uses No. 950 cells. Has large head. Less batteries.

No.	Er. No.	List	Each
N2103	2642	1.65	1.09

Official Boy Scout

Uses new prefocused lamp in special reflector. Finished in khaki with chrome trimming. 400-ft. range. Uses No. 950 cells.

No.	Er. No.	List	Each
N2104	8257	1.15	75c



Two-Cell Floodlight

New, modern design. Finished in black with chrome trimming. Throws wide range of light. Uses No. 950 cells. Less batteries.


No.	Er. No.	List	Each
N2105	2250	69c	47c



Industrial Flashlight

Focusing. Guaranteed long life under hard use. Case of reinforced fibre. Uses No. 950 cells.

2-CELL TYPE			
No.	Er. No.	List	Each
N2106	1251	1.85	1.23
3-CELL TYPE			
No.	Er. No.	List	Each
N2107	1351	2.25	1.50



Eveready Pen Light

Clips in the pocket like a fountain pen. Chrome finish. Uses two No. 915 cells. Display card furnished when eight are purchased.

No.	Er. No.	List	Each
N2108	210	49c	33c



Waterproof Flashlight

Absolute safety. Can be used under water. Positive switch. Case soft rubber with unbreakable lens. Uses No. 950 cells.

2-CELL TYPE			
No.	Er. No.	List	Each
N2109	3254	2.05	1.37
3-CELL TYPE			
No.	Er. No.	List	Each
N2110	3354	2.45	1.64



Girl Scout Flashlight

Official design. Finished in jade green with chrome. 300-ft. range. Has candle feature and ring hanger. Uses two No. 935 cells.

No.	Er. No.	List	Each
N2111	2664	78c	52c


Focusing Flashlight



Finished in nickel. Focusing type. Uses No. 950 cells.

2-CELL TYPE			
No.	Er. No.	List	Each
N2112	251	59c	28c
3-CELL TYPE			
No.	Er. No.	List	Each
N2113	351	79c	39c

Five-Cell Searchlight



Finished in chrome. Has 2500-ft. range. Size, 14½x1½ in. Uses five No. 950 cells.

No.	Er. No.	List	Each
N2114	2645	2.25	1.50

Baby Flashlight



Focusing type. Has 300-ft. range. Chrome finish. Uses two No. 935 cells. Eveready sure-action switch.

No.	Er. No.	List	Each
N2115	2663	1.00	67c



Dry Cells

EVEREADY No. 6
High quality—long life.
No. List Each 12, Ea.
N2116 40c 29c 26½c

EVEREADY No. 16
Competitive priced.
No. List Each 12, Ea.
N2117 25c 20½c 19c

Mazda Flashlight Lamps



Genuine Mazda Lamps			10 For	
No.	Mazda	Each		
N2119	502	8c		60c
N2120	112	7c		54c
N2121	222	7c		54c
N2122	14	7c		54c
N2123	13	7c		54c
N2124	31	8c		60c
N2125	PR2	10c		78c
N2126	PR3	10c		78c
N2127	714	6c		42c
N2128	713	6c		42c

Flashlight Batteries



No. 950 — LARGE UNIT CELL			
No.	List	Each	48, per C
N2129	10c	7½c	6.50
No. 935 — MEDIUM UNIT CELL			
No.	List	Each	12, per C
N2130	10c	7½c	6.50
No. 915 — PENLITE CELL			
No.	List	Each	12, per C
N2131	5c	3½c	3.25

Eveready Lantern Battery

No. 409
Long life lantern battery.
No. List Each
N2118 50c 35c



RITTENHOUSE ELECTRIC DOOR CHIMES



VOGUE

Beautiful plastic housing and long, heavy wall tubes make up this graceful, modern chime. Furnished complete with proper transformer to assure correct tone. Double purpose type, two distinct signals for front and rear door. Size, 49x8 in. Available in ivory and brass or white and chrome. Specify.

No.	List	Each	6, Ea.
L1441	15.00	9.75	9.00

PRESIDENT



This chime is unsurpassed for charm and tone quality. Gracefully styled tubes with new design plastic housing. Furnished complete with transformer. Available in single purpose for one door or double purpose for two doors. Colors are Ivory and Brass or Walnut and Brass. Specify.

SINGLE PURPOSE

No.	List	Each	6, Ea.
L1442	6.95	4.52	4.17

DOUBLE PURPOSE

L1443	7.95	5.17	4.77
-------	------	------	------

GUARDIAN

This long tube chime was designed for the smaller apartment or home where great volume is not necessary. Size, 41x8 in. Available for one or two doors. Operates on 8-10-volt transformer, not included. Finished in ivory and brass or bronze and brass. Specify.

SINGLE PURPOSE

No.	List	Each	6, Ea.
L1444	4.75	3.08	2.85

DOUBLE PURPOSE

No.	List	Each	6, Ea.
L1445	5.25	3.41	3.15



SENTINAL



Designed for use when wall space is limited. Short tubes are 14 inches overall. Has rich, deep musical tone. Finished in ivory and brass.

SINGLE PURPOSE

No.	List	Each	6, Ea.
L1449	5.50	3.57	3.30

DOUBLE PURPOSE

No.	List	Each	6, Ea.
L1450	6.50	4.22	3.90

TWINTONE



This well designed door chime produces two distinct musical notes. Operates on any good door bell transformer. Size, 8x4 in. Finished in ivory and gold.

SINGLE PURPOSE

No.	List	Each	6, Ea.
L1446	2.95	1.97	1.92

DOUBLE PURPOSE

No.	List	Each	6, Ea.
L1447	3.95	2.57	2.37

MODEL No. 102


An exceptional value. Fully inclosed. Sounds two distinct musical notes. Finished in beautiful ivory and gold. Operates on door bell transformer.

SINGLE PURPOSE

No.	List	Each	6, Ea.
L1448	1.95	1.27	1.17



MODEL No. 101



Above. This chime has rare tone quality in comparison to its very low price. Has a beautiful, clear, bell-like tone. Operates on any standard door bell transformer. Finished in ivory and gold.

No.	List	Each	6, Ea.
L1451	1.00	65c	60c


I. E. S. CONVERTER



A converter head that is used when only the shaded light is desired. Decorative husk is equipped with 3-light mogul socket. I.E.S. type shade is included. Assembly completely wired ready to screw onto the old lamp. Finished in gold to harmonize with any other finish. Individually packed.

No.	List	Each	3, Ea.
L1452	3.30	1.65	1.60

COMBINATION CONVERTER



This well-constructed head will convert any lamp into the new style of lighting. Head has three candle lights. Brackets are cast. Center light has I.E.S. type shade with 3-light socket. Glass shade included. Assembly is completely wired with sufficient wire for any floor lamp. Plug included. Finished in gold to harmonize with any finish now on the old lamp.

No.	List	Each	3, Ea.
L1453	4.50	2.85	2.75

GENUINE INLAND I. E. S. SHADES



Made of finest quality Inland glass.

BLOWN TYPE

No.	Size	Each	6, Ea.
L1454	2 1/4 x 6 3/8 in.	25 1/2c	23c
L1455	2 1/4 x 8 in.	45c	41 1/2c
L1456	2 3/8 x 9 3/4 in.	60c	54c
L1457	2 3/4 x 10 in.	68c	61c

PRESSED TYPE

No.	Size	Each	6, Ea.
L1458	2 1/4 x 8 in.	40 1/2c	36c
L1459	2 3/4 x 10 in.	52 1/2c	47c

INDIVIDUAL FIXTURES by VIRDEN

THE NEW HARWICH SERIES



Will charm the period designed room beyond expectation. Finished in forged iron and trimmed in old brass. 5 shaded lights. Spread 19 inches. Wired complete.

No.	List	Each
V1755	18.90	9.45



Two-light bracket to match V1755 fixture. Just the thing for knotty pine walls. Back-plate measures 12x5 1/4 inches.

No.	List	Each
V1722	6.60	3.30




5 1/4-inch semi-indirect converter. Simply attach to light bulb of bare fixture. Ivory glass.

No.	List	Each
J778	81c	40c



Finished in colonial brass and combined with the astrolcut glass shade. This fixture is a leader in the period style. 100 watt capacity.

No.	List	Each
V96	4.95	2.97

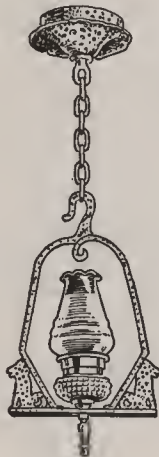

Ingeniously designed so as to create an atmosphere of the days of old. For hall, reception room, etc. Overall length 36 inches.

No.	List	Each
V1751	5.40	2.70



One-light bracket designed and finished to match V1755. Has simple yet compelling charm. Back-plate measures 12x5 1/4 inches.

No.	List	Each
V1721	4.20	2.10



A charming bedroom fixture. Ivory bolder supports gold glass with peach center. 75 watt capacity.

No.	List	Each
J281P	3.75	1.87

THE CARLETON SERIES

VIRDEN FIXTURES are UNDERWRITER'S APPROVED




A ceiling fixture designed for modern beauty. Soft light passes through ivory bottom glass. Two lights. Spread 12 inches, depth 13 1/2 inches.

No.	List	Each
V6022	8.70	4.35



This beautiful semi-indirect unit of modern design is finished in ivory and gold with ivory bottom glass. Crystal finial on bottom glass. Spread 16 inches.

No.	List	Each
V6016	14.85	7.42

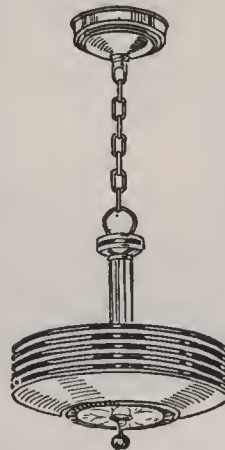

A 12-inch spread indirect drop fixture. Finish matches V6016. Has 2 lights with a total capacity of 200 watts. Overall length measures 36 inches.

No.	List	Each
V6012	10.50	5.25



One of the foremost brackets in the Virden line. Designed and finished to match V6016. Lights in a semi-indirect effect. Back-plate 7x7 1/2 inches. 60 watt capacity.

No.	List	Each
V6001	4.50	2.25

Styled to fit into the most exacting surroundings, this new style semi-indirect fixture promises to be a sales leader. Beautiful glass shade is crystal etched. Holder is ivory and brass. Spread 13 1/2 inches.

No.	List	Each
V1922	7.95	3.97



Will add to the beauty of any bedroom. Ivory holder supports 9 1/2-inch crystal etched shade. Capacity 75 watts.

No.	List	Each
J231-C	2.55	1.27




A 7 1/4-inch crystal etched semi-indirect ceiling piece to fit into most any spot. Holder ivory. Capacity 60 watts.

No.	List	Each
J-307	1.80	90c

INDIVIDUAL FIXTURES by VIRDEN


THE GLENDALE SERIES

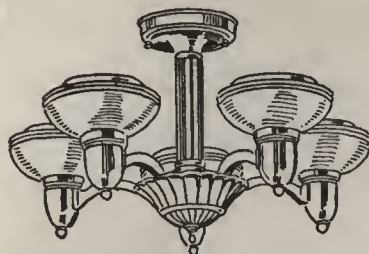

Same as V3035 except being ceiling type it has a depth of 13 inches. Has no switch control. Shades will hold bulb up to 40 watt size. A fine living room fixture.


No.	List	Each
V3025BC	9.90	4.95

COMPLETELY WIRED

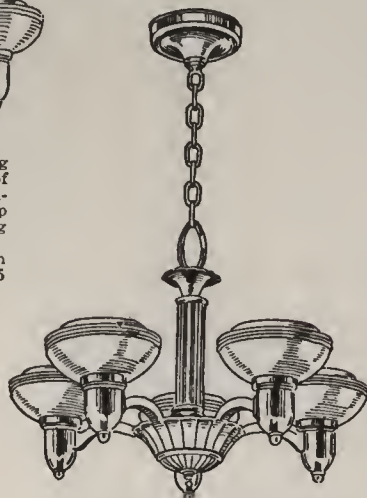


In this attractive fixture we find all the qualities of good lighting at a cost within most everyone's reach. Finished in bronze and chrome. Spread, 19 in. Has 2-3-5 light control.

No.	List	Each
V3035BC	10.95	5.47

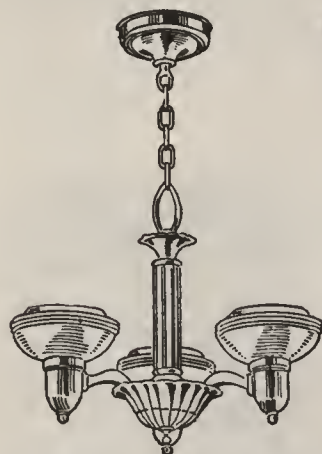

Three-light drop fixture to match V3035 in finish and design. Spread is 17 inches. Furnished with on and off switch. Recommended for good taste in lighting. Overall, 36 inches.

No.	List	Each
V3033BC	8.40	4.20




One light shaded ceiling fixture to match V3035. Gracefully designed for maximum beauty. Spread, 9 1/4 inches. It is smart to fixture the home throughout with Virden's Glendale series.

No.	List	Each
3041BC	3.90	1.85




One-light Glendale bracket. Finished in bronze and gold. Back-plate measures 4 3/4 inches. Extends 6 1/2 inches. Canopy switch wired in back-plate.

No.	List	Each
3001BC	2.85	1.42



Dainty bedroom design finished in delicate tones of old ivory. Three lights. Spread, 10 inches.

No.	List	Each
V1243	2.25	1.12



Gracefully designed one-light bracket finished in old ivory. Wired pull chain. Back-plate, 4 1/2 x 6 1/2 inches.


No.	List	Each
V1201	1.50	75c

THE MIRAFLEUR SERIES



A ceiling type fixture with the same lines of No. V2916. Has a spread of 15 1/4 inches and a depth of 12 3/4 inches.

No.	List	Each
V2926	9.90	4.95

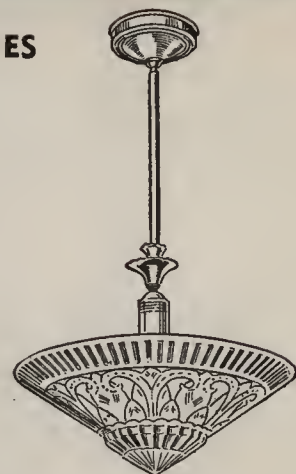


This fixture offers something distinctly unique in glassware. Affords a soft, semi-direct, mellow light. Spread, 15 1/2 inches. Overall, 28 inches. Finish, ivory and gold.

No.	List	Each
V2916	11.70	5.85



Graceful one-light bracket to match V2916. Has mellow-glow shade with 40 watt capacity. Finished in ivory and gold. Completely wired.

No.	List	Each
V2901	3.60	1.80

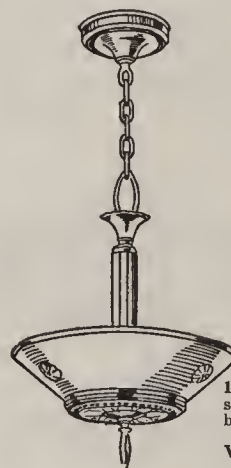


A lovely, graceful unit that combines excellent indirect light with soft, direct light through the bottom glass panel. Fixture spread is 16 inches, has 2 lights, and is finished in ivory and gold.

No.	List	Each
V7016	13.65	6.87


Identical to V7016 except has a spread of 12 inches. Switch in bottom turns light on or off.

No.	List	Each
V7012	9.90	4.95



A three-light ceiling fixture with charm. Spread, 10 inches. Finished in ivory and gold.

No.	List	Each
V1043	3.45	1.77



A pleasing glow of light is produced by this shaded one-light bracket. Finished in ivory and gold. Back-plate, 4 1/2 inches.

No.	List	Each
V1021	2.55	1.37

RESIDENTIAL LIGHTING FIXTURES by VIRDEN

THE AVALON SERIES




VIRDEN
FIXTURES
are
COMPLETELY
WIRED.

A charming hall or reception room piece. Finished in chrome and bronze. Overall length, 16 inches. Spread, 6 $\frac{3}{4}$ inches.

No.	List	Each
V1641	4.80	2.40


This sophisticated design will be appreciated by all. Beautifully finished in chrome and bronze with ivory glass shades. Has 2-3-5 light control. Spread, 19 inches—overall, 36 inches.

No.	List	Each
V1605	16.95	8.47



One-light wall bracket to match V1605. Back-plate measures 6x4 $\frac{1}{2}$ inches. Has a 6-inch extension.

No.	List	Each
V1601	3.30	1.65



Five-light ceiling fixture with 16-inch overall length. All other details same as V1605. Suitable for low ceilings.

No.	List	Each
V1625	16.35	8.17

THE ALDERSYDE SERIES




Finished in antique gold with delicate touches of color. Interesting design will enhance the room for an indefinite period. Spread, 15 $\frac{1}{2}$ inches. Length, 36 inches. Has on and off switch.

No.	List	Each
V5035	4.65	2.32


One-light bracket to match V5035 fixture. Has pull chain socket for convenience.

No.	List	Each
V5001	1.65	82c



THE HUNTINGTON SERIES

Completely Wired.

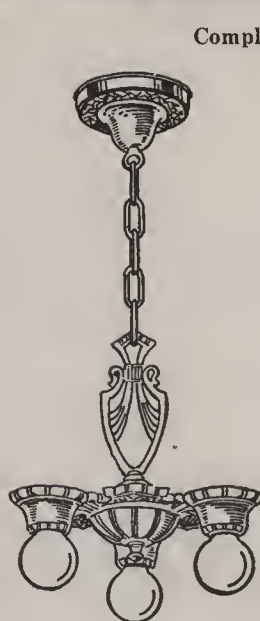


Same styling as V1335 except only 3 light. Spread, 12 $\frac{1}{2}$ inches.

No.	List	Each
V1333	4.65	2.32




One-light ceiling Beam light. Finished in ivory.

No.	List	Each
V1341	1.35	62c

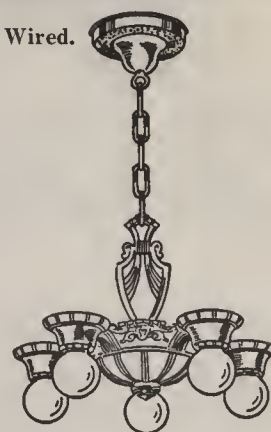

Cheerful appearance has made this fixture a sales leader. Finished in Toned Ivory and gold. Overall length, 36 inches. Spread 16 inches.

No.	List	Each
V1335	5.85	2.92



Conforms to V1335 except is flush to the ceiling type. Depth only 4 $\frac{1}{2}$ inches. Ideal for very low ceilings.

No.	List	Each
V1345	3.90	1.95



A two-light bracket to match V1335. Back-plate measures 4 $\frac{1}{2}$ x10 inches.

No.	List	Each
V1302	2.55	1.27

This one-light bracket has the added feature of a convenience outlet built in. Especially suited for the bedroom.

No.	List	Each
V1307	2.25	1.13



Three-light suspended fixture finished in gold. Designed for beauty and efficiency. Spread 13 inches.


No.	List	Each
V5033	4.65	2.32



An ideal 3-light ceiling fixture for the smaller room. Matches fixture V5035 in color and design. Spread, 13 inches.

No.	List	Each
V5043	2.70	1.35

OUTDOOR LANTERNS—CEILING FIXTURES



A lantern with beauty and efficiency. Finished in rust-proof rusty iron. Back-plate, 6 1/2 x 4 1/2 in. Lantern, 9 1/4 x 5 1/4 in. Crystal glass. Wired.

No.	List	Each
V927	5.25	2.83


Artistically designed. Forged iron finish. Lantern measures 8 1/2 x 5 1/2 in. Wired complete.

No.	List	Each
J987	4.95	2.47



Graceful two-light indirect ceiling fixture finished in ivory and gold. 100-watt capacity. Has 12-inch spread.

No.	List	Each
V352	5.85	2.92



Appealing in design. Forged iron finish. Amber crackled glass. Lantern size, 7 x 5 1/2 in. Wired.

No.	List	Each
V977	6.15	3.07


Ideal Porch Light. Solid copper holder. Amber glass measures 7 1/2 x 5 in. Wired complete.

No.	List	Each
J53-908	1.65	82c



Polished chrome holder supports ivory crystal fluted glass shade. 75 watts capacity. Has 10 1/2-inch spread.

No.	List	Each
J291C	5.10	2.55



Has a welcoming glass. Is 10 1/2 in. long and lantern, 9 x 4 1/4 in. Finished in Antique copper with Crystal Marine globe.

No.	List	Each
V345	4.05	2.02

Durably constructed of rustproof iron. Finished in black with Silver Moss panels. Back-plate, 10 x 4 1/2 in. Wired.

No.	List	Each
V177	2.40	1.20



Beautiful crystal etched glass supported by ivory ceiling holder. 100 watts capacity. Has 10 1/2-inch spread.

No.	List	Each
J381	2.55	1.27





Rustproof ceiling lantern. Finished in black with Silver Moss glass. Lantern measures 5 1/4 x 6 1/4 in. Wired.

No.	List	Each
V176	2.25	1.12

Handsome in appearance. Finished in antique copper with Crystal Marine globe. Lantern measures 9 x 4 1/2 in.

No.	List	Each
V347	4.20	2.10



Well designed totally indirect ceiling fixture finished in ivory and gold. 150 watts capacity. Has 12-inch spread.

No.	List	Each
V1981	3.00	1.50



Better quality 2-light fixture. Ivory pastelle finish. Wired.

No.	Keyless	List	Each
V152		1.08	54c
V152PC	Pull chain	1.59	79c



Competitive 2-light ceiling fixture. Finished in Ivory Poly. Wired.

No.	Keyless	List	Each
L3016		82c	41c
L3017	Pull chain	1.38	69c



11 1/2-inch ivory tinted shade filters pleasing light into a room. Holder is finished in ivory.

No.	List	Each
J371	4.50	2.25



Handsome ivory and clear glass shade is supported by ivory holder. 75-watt capacity. Has 9 1/2-inch spread.

No.	List	Each
J391	2.40	1.20



Made especially for the bedroom. Ceiling holder crystal and chrome. Glass shade available in green, ivory, blue or honey. Specify color when ordering.

No.	List	Each
L3015	3.30	1.65


COMMERCIAL FIXTURES and GLASSWARE

VIRDEN LIGHT CONDITIONERS CAN BE PURCHASED SEPARATELY OR WITH HANGERS AS SHOWN




Light Conditioner

No. 9 in. spread, 6 in. fitter. List, 4.50. Each... 2.40
No. J1 in. spread, 4 in. fitter. List, 3.00. Each... 1.50
No. V1 6 in. chrome hanger only. List, 4.20. Each... 2.10

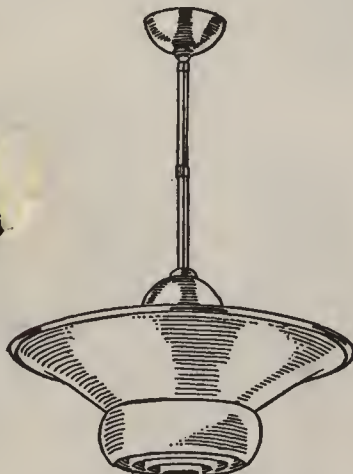

Criterion Series


No. J814. 14 in. spread, 4 in. fitter. List, 3.75. Each... 1.87½
No. J817. 17 in. spread, 6 in. fitter. List, 4.50. Each... 2.25
No. V156C. 6 in. chrome hanger only. List, 4.20. Each... 2.10



Modern Unit

A size for every purpose.

No.	Size	Each	6, Ea.
L3000	4x8 in.	45c	40c
L3001	6x10 in.	1.20	1.08
L3002	6x11 in.	1.60	1.44
L3003	6x12 in.	1.90	1.80



Emperor Unit

High efficiency — modern design.

No.	Size	Each
L3004	6x12 in.	1.11
L3005	6x14 in.	1.50
L3006	6x16 in.	1.97½



Standard Unit


No.	Size	Each	6, Ea.
L3007	4x9 in.	35c	32c
L3008	6x12 in.	96c	90c
L3009	6x14 in.	1.20	1.10
L3010	6x16 in.	1.76	1.65



Ball Globes

Opal Glass.

No.	Size	Each	12, Ea.
L3011	3¼x6 in.	28c	25c
L3012	3¼x7 in.	35c	32c
L3013	4 x 8 in.	39c	33c
L3014	6 x 12 in.	1.13	1.10




Senator Unit

Latest style with louvered bottom. Lots of direct light.

No.	Size	Each
J3308	4x8 in.	75c
J3310	6x12 in.	2.13
J3314	6x14 in.	2.84


Virden quality fixtures lead the commercial lighting field in new styling.

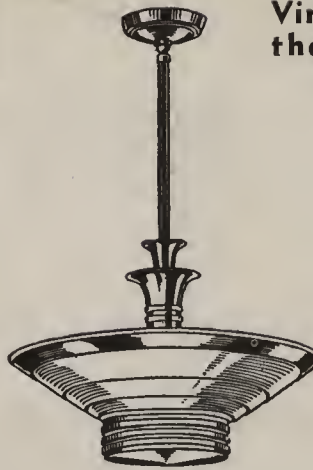

The Auralite

Complete semi-indirect fixture. Chrome finish. Length, 36 in. Wired.


No.	Capacity	List	Each
V610	300W	12.90	6.45
V611	500W	13.50	6.75

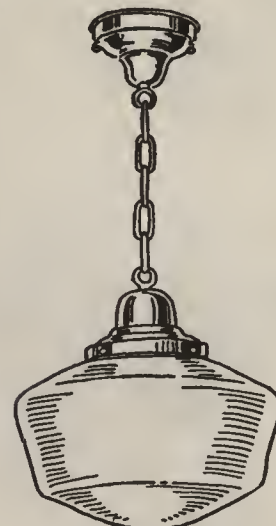

Store Unit

Low priced complete fixture. Snow white glass. Bronze fixture.

No.	Size	Each 6, Ea.
L3015	6x12 in.	1.65 1.55
L3016	6x14 in.	1.90 1.80
L3017	6x16 in.	2.50 2.35



Commercial Ceiling Holders


Heavy steel holders—well designed. Knock-out in canopy for switch. Strap included.

CHROME FINISH

No.	Size	List	Each
V34C	4 in.	1.26	63c
V36C	6 in.	1.35	67½c

BRONZE FINISH

No.	Size	List	Each
V34B	4 in.	90c	45c
V36B	6 in.	99c	49½c



V46



V556



V186

Commercial Pendants


36-inch overall height—wired.

No.	Size	Finish	List	Each
V45B	4 in.	Bronze	1.35	62c
V46B	6 in.	Bronze	1.50	68c
V45	4 in.	Chrome	2.10	99c
V46	6 in.	Chrome	2.25	1.05
V556	6 in.	Chrome	4.20	2.10
V186	6 in.	Chrome	2.70	1.35

FLUORESCENT LIGHTING FIXTURES—LAMPS

FINISHED
IN SATIN
SILVER

WIRED
COMPLETE

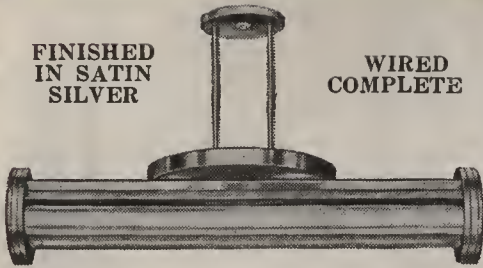

FOUR LITE



TWO LITE

Modern Fluorescent Fixture


Refreshingly new and entirely different from any fluorescent units now available. Can be had for either 2 or 4 bulbs. Uses 20-watt T-12 fluorescent bulbs. Supplied complete, ready to install. For operation on 110-125 volts, 50 cycle A.C. only. 30-inch suspension. Less bulbs.

No.	Bulbs	List	Each
L2200	2	17.70	10.52
L2201	4	30.90	18.54

FLUSH MOUNTING TYPE

No.	Bulbs	List	Each
L2202	2	13.10	7.86
L2203	4	25.30	15.78

Fluorescent Drop Fixtures

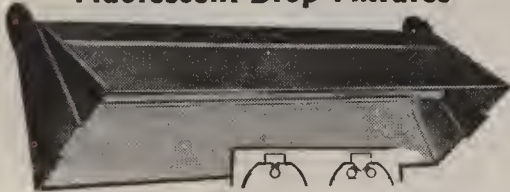

For use in offices, stores, plants, workshops, or anywhere where highly efficient light is desired. Furnished so that it can be hung on chain or 1/2-inch conduit. Wilcote reflector. For 110-125 volt, 50 cycle, A.C.

ONE-LIGHT UNIT

No.	Watts	Type	Length	List	Each
L2206	20	T12	24 in.	9.35	5.61
L2207	30	T8	35 in.	13.50	8.15
L2208	40	T12	48 in.	15.95	10.17

TWO-LIGHT UNIT

No.	Watts	Type	Length	List	Each
L2209	20	T12	24 in.	17.75	10.65
L2210	30	T8	35 in.	25.50	15.30
L2211	40	T12	48 in.	28.70	16.22

These units combine beauty and efficiency. Proper engineering and reflecting surfaces bring out the most value in the fluorescent lamp. Carefully styled to fit well into any type of establishment.

Fluorescent Vertical Store Fixture



Complete on stem hanger with built-in reactors and ready to hang. Uses four 20-watt fluorescent lamps. Overall length is 36 in. Unit measures 24 in. long by 12 in. diameter. Finished in aluminum chrome. Bottom has semi-transparent glass disc. For 100-125 volt, 60 cycle, A.C. Less bulbs.


No.	List	Each
L2212	32.90	19.74

WILSON

LIGHTING CATALOG

Complete catalog on fluorescent fixtures, Trough—Floodlights, etc. Copy sent on application.

Wilson Fluorescent Converter




SHOWING TWO-LITE FIXTURE MOUNTED IN CHAIN HANGER REPLACING GLASS GLOBE

This unit will bring a lighting installation up to date without high costs. Simply remove the old glassware from the 4-in. or 5-in. holder and easily attach this converter. Fits into socket by means of a cord and plug. Finished in satin silver. For use with either two or four 20-watt T-12 bulbs. Furnished less bulbs. For 110-125 volt, 50 cycle, A.C. only.

No.	Bulbs	List	Each
L2204	2	13.70	8.06
L2205	4	25.90	15.82

Mitchell Fluor-A-Dapter



Make your own daylight. Simply screw this adapter unit into any light socket and you have an up-to-the-minute fluorescent fixture. Has swivel plug for alignment. For use on 110-125 volt, 60 cycle, A.C. Uses 15-watt, 18-inch bulbs. Less bulb.

1-BULB TYPE

No.	List	Each
L2213	4.70	2.82

2-BULB TYPE

No.	List	Each
L2214	7.70	4.52


MITCHELL FLUORESCENT LAMPS



MODEL 2002

The unbelievably low cost of this beautifully styled lamp is greatly responsible for its overwhelming popularity. The entire unit is finished in bronze. Uses 15-watt T-8 daylight fluorescent bulb (not included). Metal shade is 18 inches long. Stands 14 1/2 inches high.

No.	List	Each	3, Ea.
L2215	7.95	5.17	4.75

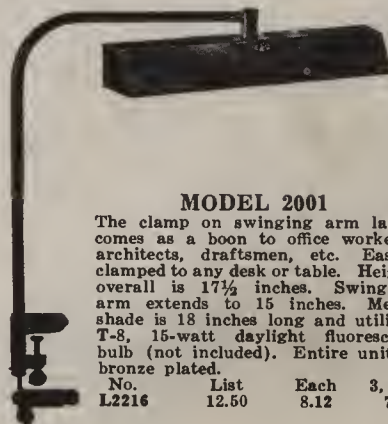

MODEL 2001

The clamp on swinging arm lamp comes as a boon to office workers, architects, draftsmen, etc. Easily clamped to any desk or table. Height overall is 17 1/2 inches. Swinging arm extends to 15 inches. Metal shade is 18 inches long and utilizes T-8, 15-watt daylight fluorescent bulb (not included). Entire unit is bronze plated.

No.	List	Each	3, Ea.
L2216	12.50	8.12	7.50




MODEL 2000

A magnificent lamp for the executive. 15 1/2 inches high. The 18-inch metal shade is adjustable. Highly polished chrome reflector. Lamp utilizes the T-8, 15-watt fluorescent bulb (not included). Convenient push switch. Auxiliary in base is fully approved. Finished in rich georgian bronze. Supports are satin gold.

No.	List	Each	3, Ea.
L2217	12.50	8.12	7.50

KITCHEN and BATHROOM FIXTURES

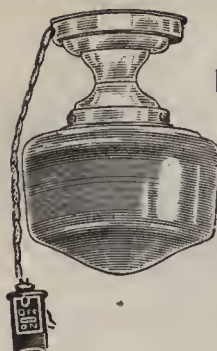


Kitchen Ceiling Fixture

Most practical style. Low price and high efficiency. White enamel holder. Complete with glass shade.

No.	Type	Each	12, Ea.
L3025	Keyless	58c	55c
L3026	Pull Chain	65c	60c
L3027	Cord and Plug	1.02	95c

Over the Mirror Bath Bracket



White porcelain in modern design. Pull chain. Fits standard box.

No.	Type	Each
L3028	With Outlet	1.43
L3029	No Outlet	1.28



Concave Back-Plate Type

No. V396. For 12-inch lamp. Back-plate, 14½x3 inches. List, 3.90. Each, 1.95.

No. V397. For 18-inch lamp. Back-plate, 20¼x3 inches. List, 5.25. Each, 2.63.

MODERN TYPE


No. L3034. For 12-inch lamp. Back-plate, 13¾x2½ inches. With outlet. List, 2.70. Each... 1.35

No. L3035. For 18-inch lamp. Back-plate, 19¾x2½ inches. With outlet. List, 4.05. Each... 2.02



Virden Kitchen Unit

Modern designed 4-inch holder and 8½-inch glass. 150 watt capacity. Keyless.



No.	List	Each
J60/3508W	1.68	84c



The new prismatic bottom shade on this chrome over the mirror fixture increases its efficiency. Wired with outlet.

No.	List	Each
V53/652CO	2.85	1.42

Over-Mirror Light



Chrome holder with crystal glass louvred bottom. Wired complete.

No.	List	Each
J53/3901CO	2.55	1.27



Louvred Kitchen Unit

Completely new. 4-inch chrome holder and 8½-inch louvred bottom glass. 150 watts. Keyless.

No.	List	Each
J60/3908	2.85	1.42



Porcelain Bath Bracket


New and smart styling. Back-plate, 4x6½ inches. White porcelain.

No.	Type	Each
L3030	With Outlet	70c
L3031	No Outlet	60c


Paulding Bath Bracket

Has turn knob switch. Back-plate, 4x6 inches.

No.	Type	Each
L3032	With Outlet	60c
L3033	No Outlet	55c



Shaded Bath Bracket



White enamel holder and opal half-shade.


Without outlet.

No.	List	Each
J62/3501	1.71	85c

with outlet

No.	List	Each
J62/3510CO	2.01	1.00

Ceiling Shaded Fixture



Chrome pan is heavy spinning. Shade is good quality opal glass. Two lights.

No.	Glass Dia.	Each
L3036	8 in.	1.57
L3037	10 in.	2.30
L3038	12 in.	3.70



Modern Bracket

Diamond shape back-plate measures 7x4 inches. Polished chrome finish. Wired complete with turn knob switch. Will not tarnish.

No.	List	Each
V82	2.10	1.05



Vapor-Proof Unit

White porcelain, for bathroom or shower.

No.	List	Each
V219	3.00	1.50

Pantrylite

Complete fixture in white enamel with pull chain socket.

No.	Each
V20E	25c



LIGHTING FIXTURE PARTS


Kitchen Holder



Bare-no socket pull chain illet—4-inch fitter.

No.	White Enamel	Each	10, Ea.
V25	21c	19c	
No.	Chrome	Each	10, Ea.
V25C	33c	36c	

Modern Ceiling Holder



6 3/4-inch canopy with 4-inch fitter. Complete with socket. Chrome finish.

No.	Type	Each
L3047	Keyless	55c
L3048	Pull	60c

Crystal Beam Light



Keyless—has cut crystal decorated plate.

No.	List	Each
V851	3.00	1.50


Outdoor Bracket



Black enamel. 3 1/4-inch fitter. Wired complete.

No.	List	Each
V148	2.10	1.05

Porcelain Holder



White. 4-inch fitter. Pull Chain

No.	Each
L3040	53c
L3041	Keyless 45c
L3042	CORD AND SWITCH .87c

Beam Light



Canopy 5 1/2-inch diameter. No socket included. Finished in Brown tone.

No.	List	Each
V2542	45c	22c

Ceiling Light



Antique gold finish. Has cast decorated ring. Keyless.

No.	List	Each
L3055	3.00	1.50

Beam Light



Has 5 1/2-inch canopy. Finished in gold poly. Keyless.

No.	List	Each
V47	58c	29c

Cast Iron Ring



Black Cast Iron

No.	Size	Each
L3056	3 1/4 in.	13c
L3057	4 in.	20c

Iron Extension



3/8-inch female x 3/8-inch male.

No.	Extension 1 Inch	Each
L3065	3c	2.50
No.	Extension 1 3/4 Inches	Each
L3066	3c	100

Half-Shade



No.	2 1/4-inch Fitter	Each	Doz.
L3043	25c		2.75

Fixture Chain



Steel chain. 2-inch links. 100

No.	Finish	Yd.	Yds.
L3049	B. B.	9c	8.50
L3050	Chrome	19c	17.00
L3051	Stat.Br.	11c	10.00

Clamp On Holders



Brush Brass finish. For brass shell sockets.


No.	4-inch Fitter	Each	10, Ea.
L3059	15c		14c
No.	6-inch Fitter	Each	10, Ea.
L3060	18 1/2c		16 1/2c

Steel Locknuts



No.	Bright Steel	Size	100	1000
L3067	1/8 in.	25c	1.60	
L3068	1/4 in.	40c	3.06	
L3069	3/8 in.	45c	3.69	

Modern Half-Shade



No.	2 1/4-inch Fitter—Opal Glass	Each	12, Ea.
L3044	33c		30c

Fixture Canopy



Finish Brush Brass 3/4-inch slip.

No.	Each	10, Ea.	15c
L3052	17c		

Shade Holder



B. B. finish. 2 1/4-inch fitter.

No.	For Brass Shell Socket	Each	25, Ea.
L3061	5 1/2c		4 1/4c
No.	For Porcelain Socket	Each	25, Ea.
L3062	7 1/2c		6 1/2c

Bracket Strap



Useful in hanging wall brackets.

No.	Each	25, Ea.	3.25
L3070	3 3/4c		

Opal Bell Shade



No.	2 1/4-inch Fitter	Size	Each
L3045	6 in.		24c
L3046	7 in.		28c

Fixture Stem



Brush Brass. Has 3/8-inch female. Stationary loop.

No.	Each	10, Ea.	9c
L3053	10c		

Uno Shade Holder



Brush Brass finish. 2 1/4-inch fitter.

No.	Each	25, Ea.	3 1/2c
L3063	4c		

Bracket Strap



Has 1/8-inch thread. No French hook.

No.	Each	100	1.10
L3071	1 1/2c		

Fixture Loop



1/8-inch male thread.

No.	Each	100	1.75
L3054	2c		

Ball Lamp Adapter

For brass sockets.

No.	Each	100	5.50
L3064	6c		



Reducing Bushings



No.	Size	Each	100
L3072	1/4 x 1/4-27	1 1/4c	75c
L3073	1/4 x 3/8	2c	1.15
L3074	3/8 x 1/2	2 1/2c	1.75
L3075	1/2 x 3/4	2 1/2c	1.75
L3076	3/4 x 7/8	4c	3.50

A SAVE LAMP FOR EVERY PURPOSE



General Service, Inside Frosted Lamps

110-115-120-125-130 volts.

Medium Base

No.	Watts	Bulb	List	Each	12, Each
K2300	15	A17	15c	10c	9c
K2301	25	A19	15c	10c	9c
K2302	40	A19	15c	10c	9c
K2303	50	A19	15c	10c	9c
K2304	60	A19	15c	10c	9c
K2305	75	A21	15c	10c	9c
K2306	100	A23	15c	10c	9c
K2307	150	A25	20c	13c	12c
K2308	200	PS30	30c	20c	18c
K2309	300	PS35	50c	33c	30c

Mogul Base

No.	Watts	Bulb	List	Each	12, Each
K2310	300	PS35	70c	46c	42c
K2311	500	PS40	1.20	80c	72c
K2312	750	PS42	3.75	2.50	2.25
K2313	1000	PS42	4.00	2.67	2.40
K2314	1500	PS42	5.75	3.83	3.45

Clear Lamps — Medium Base

No.	Watts	Bulb	List	Each	12, Each
K2315	15	A17	20c	13c	12c
K2316	25	A19	20c	13c	12c
K2317	40	A19	20c	13c	12c
K2318	60	A19	20c	13c	12c
K2319	75	A23	20c	13c	12c
K2320	100	A23	20c	13c	12c
K2321	150	A25	25c	18c	15c
K2322	200	PS30	35c	23c	21c
K2323	300	PS35	55c	38c	33c

Clear Lamps — Mogul Base

No.	Watts	Bulb	List	Each	12, Each
K2324	300	PS35	75c	50c	45c
K2325	500	PS40	1.30	86c	78c
K2326	750	PS52	3.95	2.63	2.37
K2327	1000	PS52	4.25	2.83	2.55
K2328	1500	PS52	6.05	4.03	3.63

Silver Neck Intensifier Lamps

No.	Watts	Bulb	List	Each	12, Each
K2329	25	A19	35c	23c	21c
K2330	40	A19	35c	23c	21c
K2331	50	A21	40c	27c	24c
K2332	60	A21	40c	27c	24c
K2333	75	A21	40c	27c	24c
K2334	100	A23	45c	30c	27c
K2335	150	A25	60c	40c	36c
K2336	200	PS30	75c	50c	45c
K2337	300	PS35	1.35	90c	81c
K2338	500	PS40	2.00	1.33	1.20
K2339	750	PS52	4.25	2.83	2.55
K2340	1000	PS52	5.50	3.67	3.30
K2341	1500	PS52	7.00	4.67	4.20

Neon Glow Lamps



No.	Watts	Bulb	Base	List	Ea.
K2342	2	S14	Med.	50c	40c
K2343	1	G10	Med.	40c	32c
K2344	1/2	G10	Med.	40c	32c
K2345	1/4	S4 1/2	Cand.	40c	32c



Save Natural White Lamps

110-115-120-125 volts.

Medium Base

No.	Watts	Bulb	List	Each	12, Each
K2346	10	S14	20c	13c	12c
K2347	15	A17	20c	13c	12c
K2348	25	A19	20c	13c	12c
K2349	40	A19	20c	13c	12c
K2350	50	A21	20c	13c	12c
K2351	60	A21	20c	13c	12c
K2352	75	A21	20c	13c	12c
K2353	100	A23	25c	18c	15c
K2354	150	A25	30c	20c	18c
K2355	200	PS30	50c	33c	30c

Mogul Base

No.	Watts	Bulb	List	Each	12, Each
K2356	300	PS35	90c	60c	54c
K2357	500	PS40	1.75	1.17	1.05
K2358	750	PS52	5.00	3.33	3.00
K2359	1000	PS52	5.25	3.50	3.15
K2360	1500	PS52	7.15	4.77	4.29



Tubular Lamps

110-115-120-125 volts.

Intermediate Base

No.	Type	Watts	List	Ea.
K2361	T6 1/2 Clr.	25	45c	30c

Medium Base

No.	Type	Watts	List	Ea.
K2362	T10 Clr.	25	25c	17c
K2363	T10 Nat. White	25	50c	33c
K2364	T10 I.F.	25	40c	27c
K2365	T10 Clr.	40	90c	60c



Save Flameshape Lamps

Medium Base

No.	Color	Watts	Bulb	List	Ea.
K2366	White	25	F15	15c	10c
K2367	Ivory	25	F15	15c	10c
K2368	Amber	25	F15	15c	10c



Rough Service Lamps

110-115-120-125 volts.
Medium Base — I.F.

No.	Watts	Bulb	List	Each	12, Each
K2369	50	A19	30c	20c	18c
K2370	100	A23	45c	30c	27c

Daylight Lamps

110-115-120-125 volts.
Glass shaded inside so
that a light comparable to
daylight is the result.



No.	Watts	Bulb	List	Each	12, Each
K2371	10	S14	30c	20c	18c
K2372	25	A19	30c	20c	18c
K2373	60	A21	30c	20c	18c
K2374	75	A23	35c	23c	21c
K2375	100	A23	30c	20c	18c
K2376	150	A25	45c	30c	27c
K2377	200	PS30	75c	50c	45c

Mogul Base

No.	Watts	Bulb	List	Each	12, Each
K2378	300	PS35	1.15	77c	69c
K2379	500	PS40	1.95	1.30	1.17

Street Lighting Lamps

No.	Lumens	Am- peres	Light Center Lgth.	List	Each	12, Ea.
K2380	1,000	6.6	5 5/8 in.	40c	27c	24c
K2381	2,500	6.6	7 in.	80c	53c	48c
K2382	4,000	6.6	7 in.	95c	63c	57c
K2383	4,000	15*	7 in.	1.05	70c	63c
K2384	6,000	6.6	7 in.	1.35	90c	81c
K2385	6,000	20*	7 in.	1.45	97c	87c
K2386	10,000	20*	7 in.	1.85	1.30	1.11
K2387	15,000	20*	7 in.	2.55	1.70	1.53
K2388	25,000	20†	9 1/2 in.	4.80	3.20	2.88


*The 15 and 20 ampere lamps are designed for base-up burning, but with the exception of the 25,000 lumen lamps can be furnished for base-down burning at the same price, light center 6 1/4 inches.
†The 25,000 lumen lamp is not recommended for base-down burning; but if so used has a light center length of 8 1/4 inches.

Tri Light Lamps

Inside frosted lamps which permit great flexibility in lighting. Provides a moderate amount of light from a decorative value to full brilliancy with the same lamp. Three contact base.



No.	Watts	Base	List	Each	12, Each
K2389	40-60-100	Med.	45c	30c	27c
K2390	50-100-150	Med.	45c	30c	27c
K2391	50-100-150	Mog.	45c	30c	27c
K2392	100-200-300	Mog.	60c	40c	36c
K2393	200-300-500	Mog.	1.75	1.17	1.05

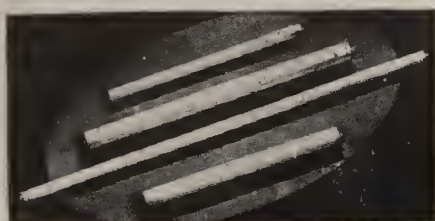

This new lamp has revolutionized the industry. Rated life, 2,000 hours. Available in blue, pink, green, gold and red at slightly higher prices.



FLUORESCENT MAZDA LAMPS

No.	Type	Color	Watts	Length	Diam.	Std. Pkg.	List	4.25 Net Orders Each	Std. Pkg. Each
K2394	T8	White	15	18 in.	1 in.	24	1.15	98c	92c
K2395	T8	Daylight	15	18 in.	1 in.	24	1.15	98c	92c
K2396	T12	White	15	18 in.	1 1/2 in.	24	1.45	1.23	1.16
K2397	T12	Daylight	15	18 in.	1 1/2 in.	24	1.45	1.23	1.16
K2398	T12	White	20	24 in.	1 1/2 in.	24	1.65	1.40	1.32
K2399	T12	Daylight	20	24 in.	1 1/2 in.	24	1.65	1.40	1.32
K2400	T8	White	30	36 in.	1 in.	24	1.50	1.27 1/2	1.20
K2401	T8	Daylight	30	36 in.	1 in.	24	1.50	1.27 1/2	1.20
K2402	T12	White	40	48 in.	1 1/2 in.	24	2.30	1.95	1.84
K2403	T12	Daylight	40	48 in.	1 1/2 in.	24	2.30	1.95	1.84

INDEX

A

Accessories, Socket20-21
Adapters, Thinwall5
Anchors, Screw9
Auxiliaries, Fluorescent17

B

Ballasts, Fluorescent17
Batteries, Eveready30
Bells19
Benders, Conduit4
Benders, Thinwall5
Bolts, Toggle9
Boxes, Cutout10
Boxes, Outlet6-7
Boxes, Porcelain8
Boxes, Switch7
Brackets, House9
Bullseyes14
Bushings, Conduit4
Bushings, Porcelain8
Bushings, Reducing4
Buttons, Push19
Buzzers19

C

Cable1-2
Caps, Attachment13-20-21
Chimes, Door31
Clamps4-5
Cleats, Porcelain9
Conduit, Rigid4
Conduit, Thinwall5
Connectors2-4-5-10
Converters, Lamp31
Cords3
Cord Sets29
Cord Sets, Range13
Couplings, Conduit4-5
Covers, Box6-7-8
Covers, Porcelain8
Covers, Unilet11
Cutouts, Porcelain10

D

Door Openers19
Drills, Signal28
Drills, Star28

E

Elements, Heating4
Elbows, Conduit5
Elbows, Thinwall29

F

Fans, Electric27
Fittings, Conduit4-5
Fittings, Entrance9-10
Fittings, Ground9
Fixtures, Fluorescent37
Fixtures, Lighting..32-33-34-35-36-38-39
Fixture Parts39
Flashers21
Fuses22
Fusetrons22

G

Glasware, Lighting36
Greenfield2
Guards, Lamp10

H

Hangers, Clock14
Hangers, Conduit7
Hangers, Fan14

I

Irons, Soldering28

K

Knobs, Nail-It9

L

Lamps, Flashlight30
Lamps, Fluorescent37
Lamps, G. E. Fluorescent40
Lamps, Save40
Locknuts4
Loom1

M

Meter Fittings, Square "D"24
Multi-Breakers, Square "D"26

N

Nipples, Chase4
Nipples, Conduit4
Nite-Lites21

P

Panels, Square "D"25
Paste, Soldering28
Plates, Switch23
Pliers, Kraeuter28
Plugs20-21

R

Receptacles8-13-14-15-18-21
Receptacles, Polarized13
Receptacles, Porcelain18
Receptacles, Range13
Receptacles, Unilet11
Reducers, Socket28
Reflectors27
Rods, Ground9

S

Seals, K/O4
Shades, I.E.S.31
Shades, Tin Cone27
Sockets10-16-18-21
Sockets, Adjustable16
Sockets, Fluorescent17
Solder28
Staples, BX2
Starters, Fluorescent17
Straps, Pipe4
Studs, Fixture4
Switches, Canopy20
Switches, Flush12-15
Switches, Pendant21
Switches, Square "D"24-25
Switches, Surface8-10-12
Switches, Time19
Switches, Weatherproof12

T

Tape, Friction28
Tape, Rubber28
Telephones19
Testers21
Tools5
Transformers19
Tubes, Porcelain9

U

Unilets11

W

Washers, Reducing4
Wire1-2-3
Wire, Fish4
Wire, Nichrome18
Wireholders, Porcelain9

IMPORTANT

PRICES

All prices shown in electrical supply catalog No. 1-A supersede prices shown in any other previous publication and are subject to change without notice. Orders will be filled at prices in effect when they are received.

ORDERING INSTRUCTIONS

We cannot express forcibly enough the value of ordering by number and giving additional brief description of each item. We desire to make shipment the same day orders are received, and your co-operation along this line will greatly assist us.

MAIL ORDERS

Unless you have an account with us, on orders for less than \$5.00 send cash with order. On larger orders we will ship C.O.D. if 25 per cent cash accompanies order.

GUARANTEE

Goods received in defective or damaged condition may be returned for immediate replacement. Any merchandise not up to your expectation may be returned at our risk. We assume all responsibility for loss or damage in transit. Shippers name and address must appear on all return packages. All prices are net prices.



Digitized by:



Association for Preservation Technology, International

Building Technology Heritage Library

<https://archive.org/details/buildingtechnologyheritagelibrary>